

2018 EQUIPMENT

**MARINE & RV**



**SEAFLO**<sup>®</sup>

*Distributor*  
*Create Flow s.r.o.*  
*tel: 00420 722 712 652*  
*info@createflow.cz*  
*www.createflow.cz*





FACTORY I

Since 2004, SEAFLO has produced small high performance pumps, ventilation system, pressurized system, fluid handling equipment, sprayers, blow-molded kayaks, plastic accessories for the Recreational Vehicle, Marine, Agricultural, Industrial and Water Sports industries. Until now we have 2 production bases, total more than 300 employees and 30,000 square meter area. Based in Xiamen China, SEAFLO distributes products globally through original equipment manufacturers, a network of established distributors, including SEAFLO's distribution center in Broadview Illinois, in USA.

With more than 20 professional engineers in R&D department, 45 professional technical staffs in factory and two professional grade laboratories. SEAFLO not only obtained more than 50 national patents but also received many international authentications including CE, CSA, RoHS, ISO 8846, ISO 8849, FDA ect.

We value the opportunity to build up strategic alliance with our partners to seize opportunities via Co-Marketing or Co-Branding.



XIAMEN OFFICE



FACTORY II



FDA      RoHS      Trademark      CE      ISO 14001:2400

ISO 9001:2015      SGS      Utility model patent certificates      Design patent certificates

CERTIFICATIONS



R & D Team



Laboratory



Mold Workshop



Automatic Injection Equipment




Production Line



Automatic Welding Equipment



Automatic Screwing Equipment

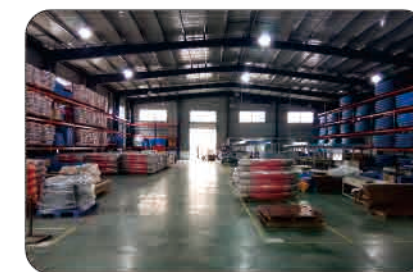

Warehouse



Loading

WHO WE ARE


- ☑ DC/AC Diaphragm Pump Specialist
- ☑ Bilge Pump Specialist
- ☑ Injection Molding Designer
- ☑ Original Equipment Manufacturer
- ☑ Original Design Manufacturer

WHY US

- ☑ Factory-owned, Vertical Integration of Production Chain
- ☑ Lower Cost and Affordable Price
- ☑ Shelf-stable Quality
- ☑ Flexible Customization
- ☑ CE RoHS ISO 9001:2015 ISO 8849 ISO8846 FDA SGS




● Marine

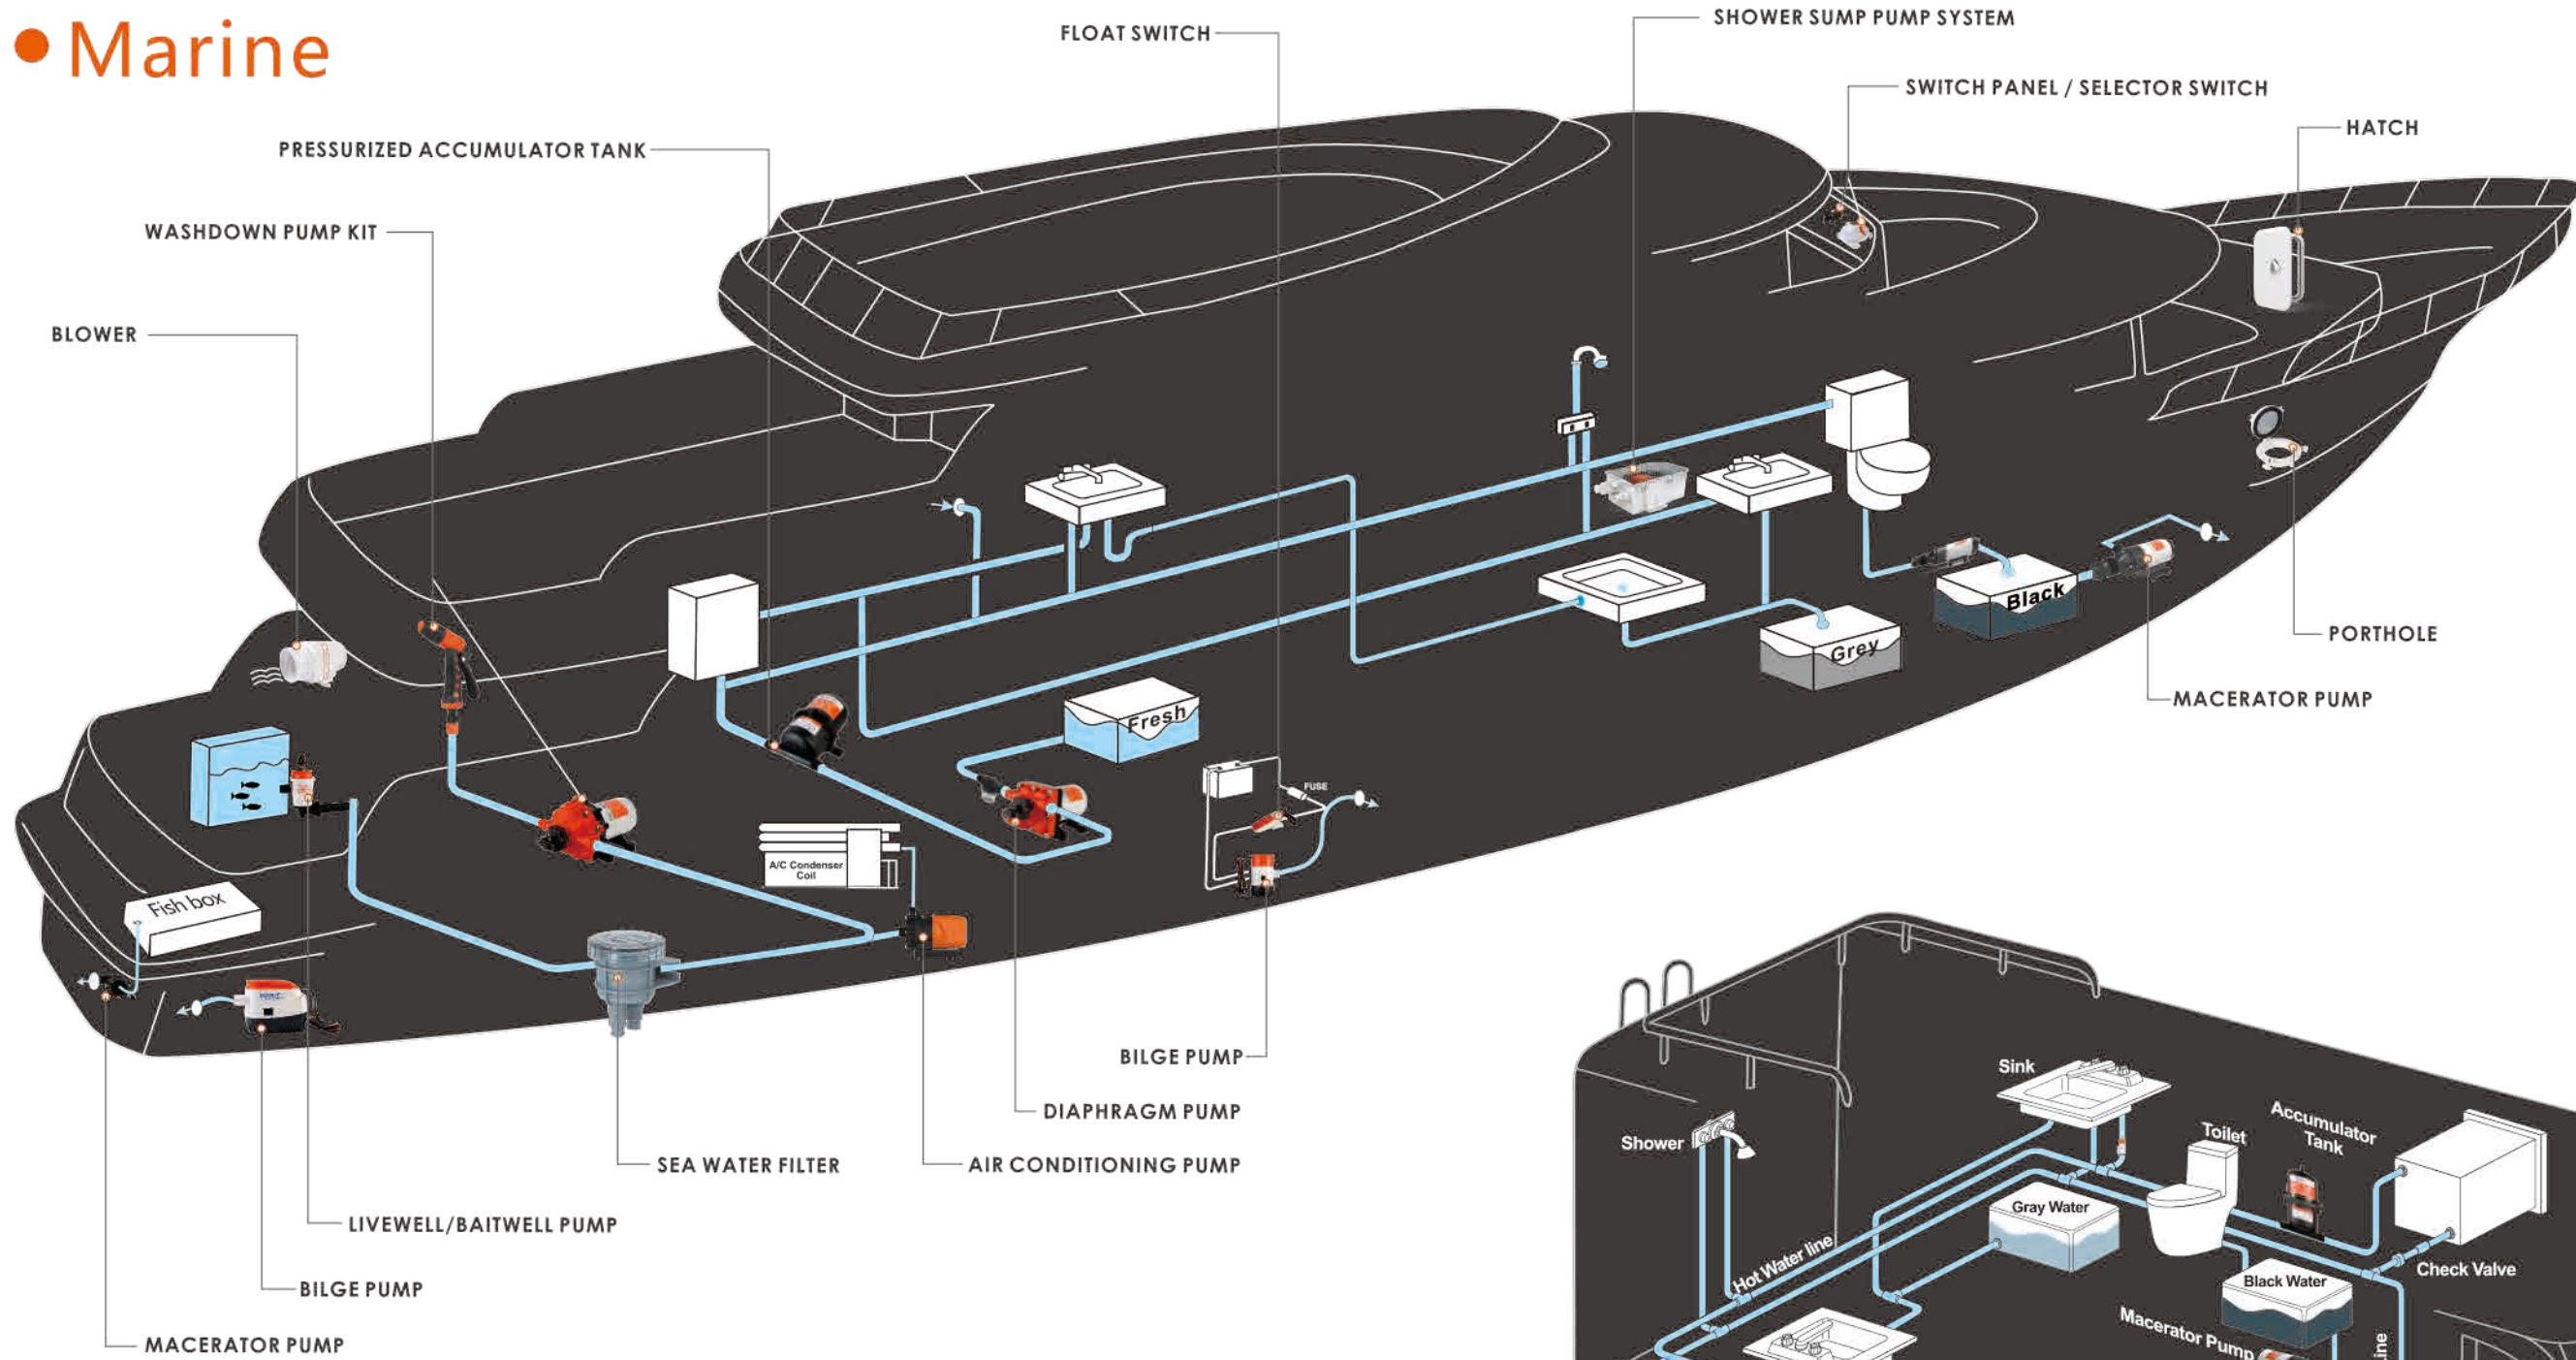

● Other Application Field





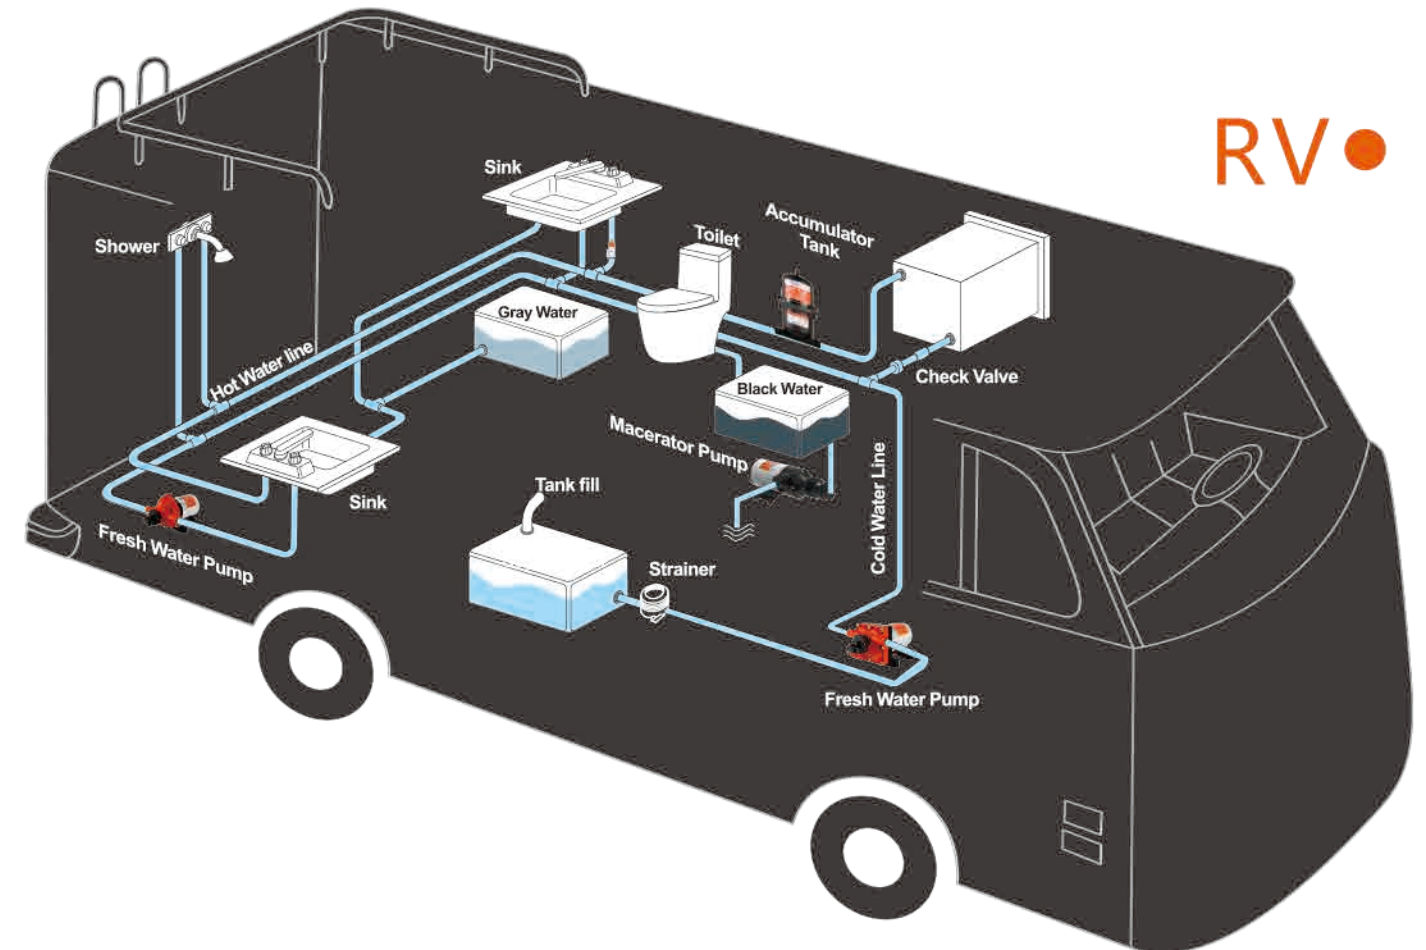




- Water System
- Wash Down
- Agricultural
- Bilge Shower
- Spraying
- Industrial
- General Purpose


RV ●






## INDEX

-  **Bilge Pumps & Livewell Pumps**  
03-15
-  **Submersible and Inline Pumps**  
16-18
-  **Switch Panel & Float Switch**  
19-23
-  **Deep Well Solar Submersible Pump**  
24
-  **Fresh Water Pumps**  
25-40
-  **Washdown Pump Kits**  
41-44
-  **Accumulator Tank & Water Pressure Systems**  
44-46
-  **Air Conditioning Pumps**  
47-48
-  **Macerator Pumps**  
49-50
-  **Gear Pumps**  
51-52
-  **Blowers**  
53-56
-  **Seawater Filter**  
57
-  **Fuel Cans 5/10/20 Liters**  
58
-  **Battery Switches**  
59-60
-  **RV Plastic Accessories**  
61-66
-  **Hand Pumps**  
67-68
-  **Hatches & Portholes**  
69-70
-  **Accessories**  
71-72

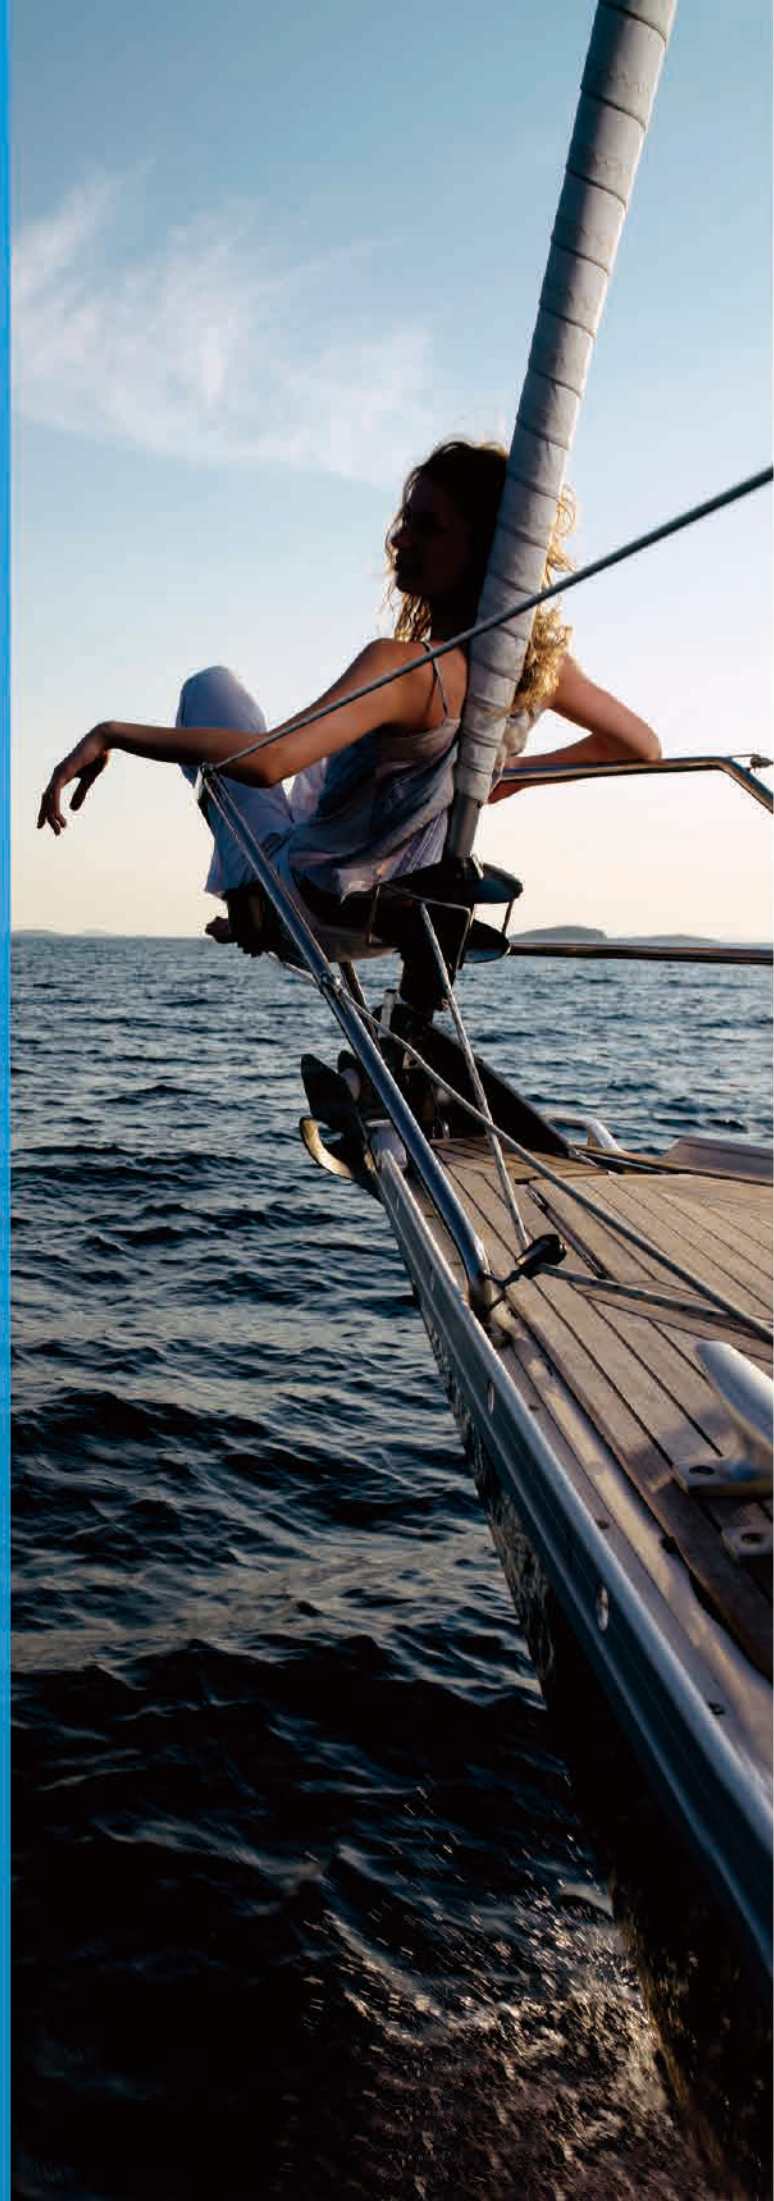

## Seaflo Custom Pump Options

### Diaphragm Pumps

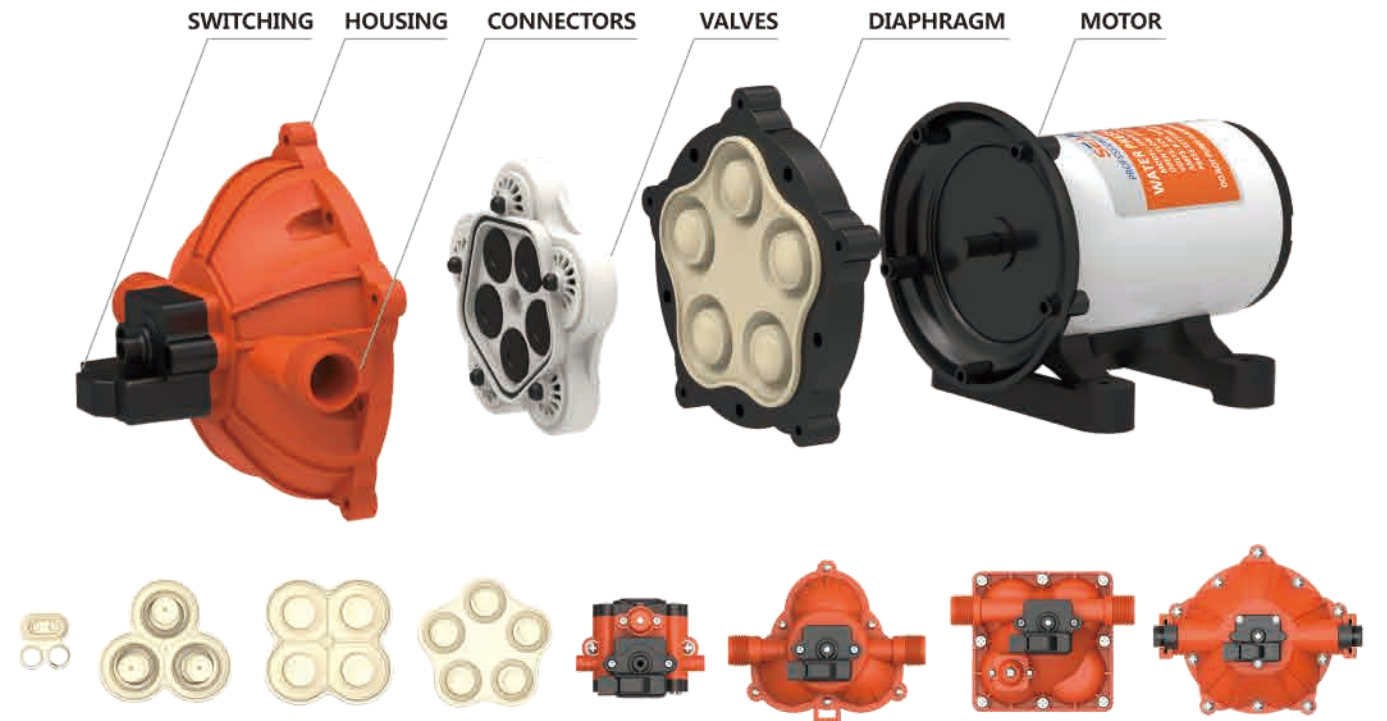

#### SWITCHING

- Bypass
- Demand
- Dual Controls
- No Controls
- Smart Controllers

#### HOUSING

- Nylon
- Polypro

#### VALVES

- Santoprene
- Viton
- Geolast
- Nylon
- Polypro
- BUNA
- EPDM

#### CONNECTORS

- Quick Attach
- FNPT
- MNPT


#### DIAPHRAGMS

- Santoprene
- Viton
- Geolast
- Various CAM Sizes
- BUNA

#### MOTORS

- Sealed
- 12,24 Volts
- 115,230 Volts
- Higher Output
- Heat Sinks
- Lead Sinks
- Lead Wires
- 2 Pin Connector
- On/Off Switch
- Special Electrical
- Connectors Available

### Bilge Pumps

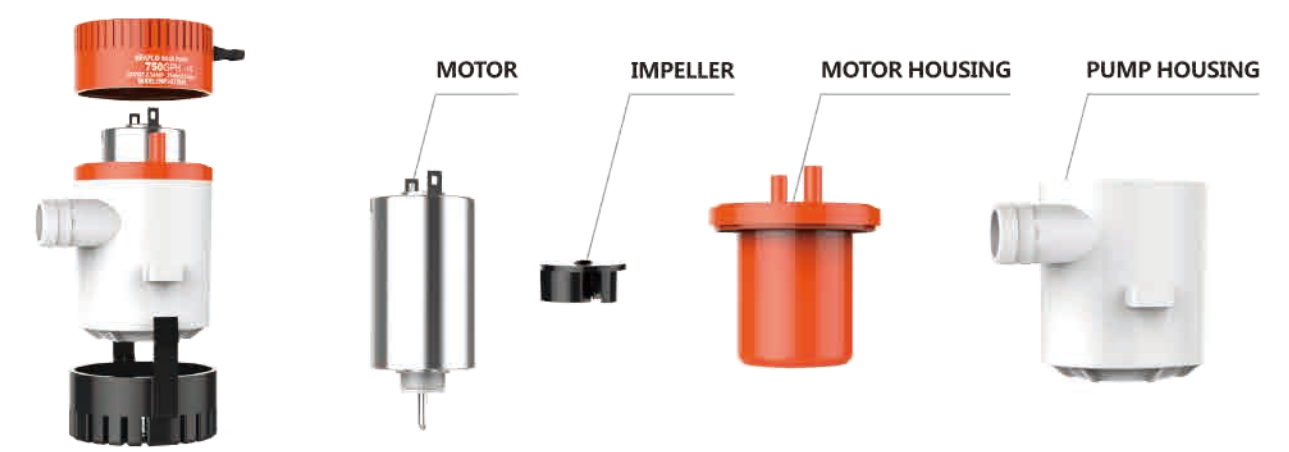

Additional Options: Barcoding, CE certified, Various packaging options, Custom label/logo





Blister  Box



Blister  Box




**AUTO BILGE PUMPS 600/750/1100 GPH**

**FEATURES & BENEFITS**

- Our revolutionary, patented design
- Allows for effortless installation and service
- With the ability to quick disconnect the power line and the strainer base in seconds,
- Proper pump care has never been easier
- Available in 600, 750, and 1100 GPH
- 18 AWG, 1 m long leads

**MOTOR**

- Type**  
Sealed, efficient, long life motor
- Temperature Limits**  
110°F (43°C) Max.
- Duty Cycle**  
Intermittent

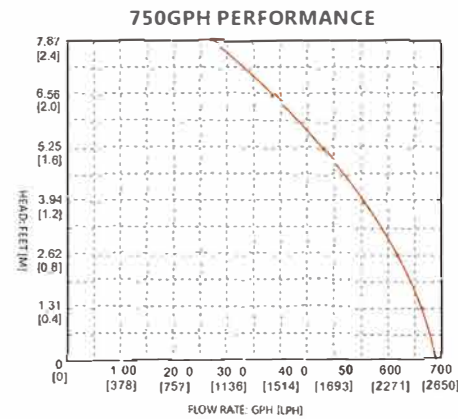







**AUTO BILGE PUMPS 600/750/1100 GPH**

**FEATURES & BENEFITS**

- All-in-one pump & switch-No float switch required
- Pump turns on when water level rises & shuts off when water is removed
- Will not pump oil-straight motor oil that enters the bilge will not turn the pump on
- Snap-off strainer for easy cleaning
- Anti-fouling impeller
- 18 AWG, 1 m long Leads

**MOTOR**

- Type**  
Sealed, efficient, long life motor
- Temperature Limits**  
110°F (43°C) Max.
- Duty Cycle**  
Intermittent

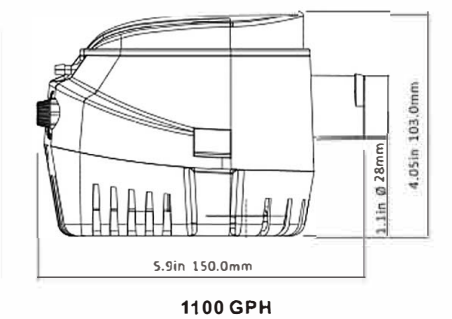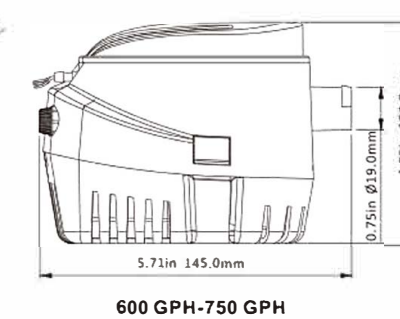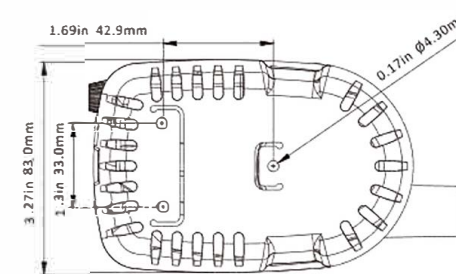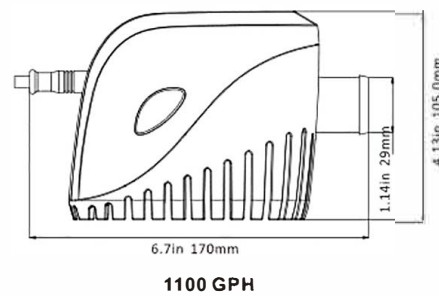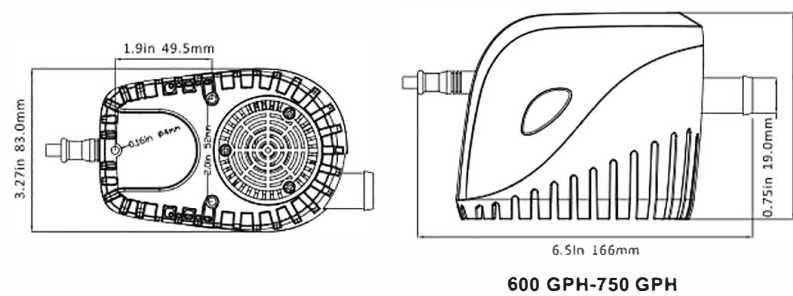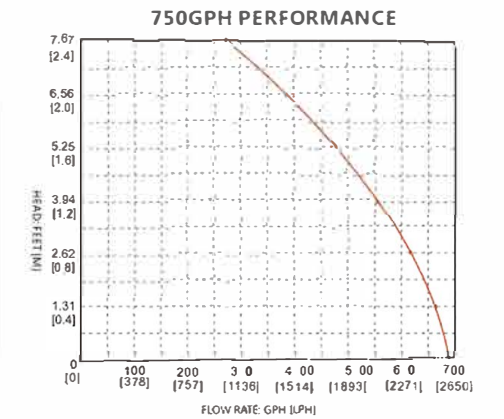

**STANDARD PUMP CONFIGURATIONS**

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G600-11	600 GPH	12V	2.5 A	2.5 m / 8.0'	1 m / 3.0'	19 mm/3/4"	0.55/0.6kg
SFBP2-G600-11	600 GPH	24V	1.5 A	2.5 m / 8.0'	1 m / 3.0'	19 mm/3/4"	0.55/0.6kg
SFBP1-G750-11	750 GPH	12V	3.0 A	3.0 m / 10.0'	1 m / 3.0'	19 mm/3/4"	0.55/0.6kg
SFBP2-G750-11	750 GPH	24V	1.6 A	3.0 m / 10.0'	1 m / 3.0'	19 mm/3/4"	0.55/0.6kg
SFBP1-G1100-11	1100 GPH	12V	3.0 A	4.0 m / 13.0'	1 m / 3.0'	29 mm/1-1/8"	0.55/0.6kg
SFBP2-G1100-11	1100 GPH	24V	1.8 A	4.0 m / 13.0'	1 m / 3.0'	29 mm/1-1/8"	0.55/0.6kg


**STANDARD PUMP CONFIGURATIONS**

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G600-06	600 GPH	12V	2.5 A	2.5 m / 8.0'	1 m / 3.0'	19 mm/3/4"	0.47/0.52 kg
SFBP2-G600-06	600 GPH	24V	1.5 A	2.5 m / 8.0'	1 m / 3.0'	19 mm/3/4"	0.47/0.52 kg
SFBP1-G750-06	750 GPH	12V	3.0 A	3.0 m / 10.0'	1 m / 3.0'	19 mm/3/4"	0.47/0.52 kg
SFBP2-G750-06	750 GPH	24V	1.6 A	3.0 m / 10.0'	1 m / 3.0'	19 mm/3/4"	0.47/0.52 kg
SFBP1-G1100-06	1100 GPH	12V	3.0 A	4.0 m / 13.0'	1 m / 3.0'	29 mm/1-1/8"	0.55/0.60 kg
SFBP2-G1100-06	1100 GPH	24V	1.8 A	4.0 m / 13.0'	1 m / 3.0'	29 mm/1-1/8"	0.55/0.60 kg





Box

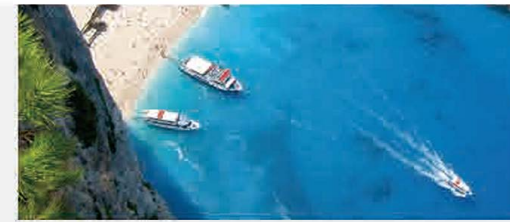

Blister



Box



350 GPH-500 GPH-750 GPH

1100 GPH



**SHOWER SUMP PUMP SYSTEM 600/750 GPH**

**FEATURES & BENEFITS**

- Removable mesh filter allows easy cleaning
- Clear screw-down cover
- Check valve on outlet
- Ignition protected
- Handles waste water from more than one tapping point
- Easy installation
- Multiple inlet ports for versatile usage
- 18 AWG, 1 m long Leads

**MOTOR**

- Type**  
Sealed, efficient, long life motor
- Duty Cycle**  
Intermittent

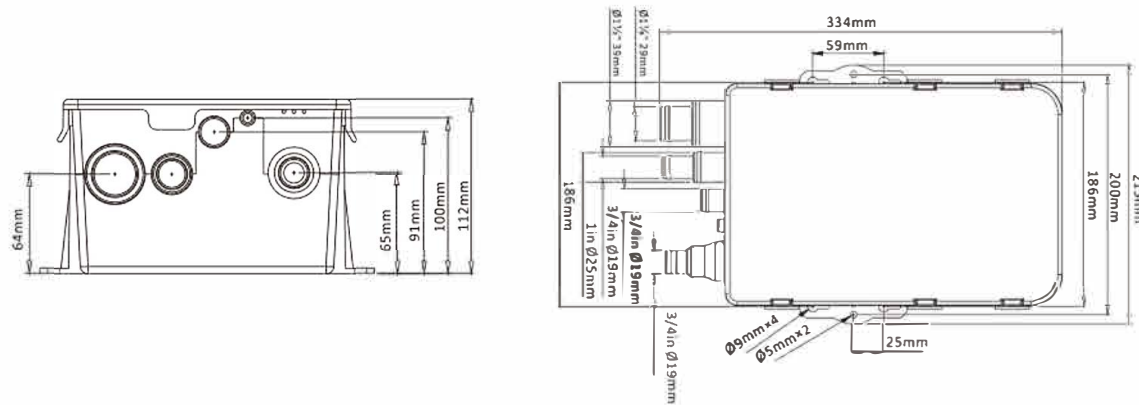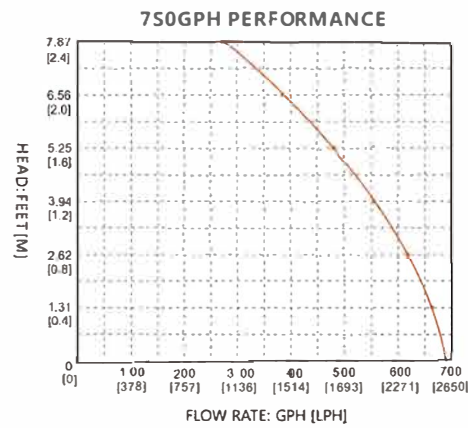

**STANDARD PUMP CONFIGURATIONS**



Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W
SFBP1-G600-07	600 GPH	12V	2.5A	2.5 m / 8.0'	1 m / 3.0'	19 mm/3/4"	1.17/1.35 kg
SFBP2-G600-07	600 GPH	24V	1.5A	2.5 m / 8.0'	1 m / 3.0'	19 mm/3/4"	1.17/1.36 kg
SFBP1-G750-07	750 GPH	12V	3.0A	3.0 m / 10.0'	1 m / 3.0'	19 mm/3/4"	1.17/1.37 kg
SFBP2-G750-07	750 GPH	24V	1.6A	3.0 m / 10.0'	1 m / 3.0'	19 mm/3/4"	1.17/1.38 kg

**NON - AUTOMATIC BILGE PUMPS 01 SERIES 350/500/750/1100 GPH**

**FEATURES**

- CE, RoHS, ISO 8846, ISO 8849 standards
- Traditional operation by switch or float switch
- Entirely Submersible
- Run dry capable for workloads
- Quiet operation
- Stainless steel shaft

- Snap-off strainer base for easy maintenance
- Pump and switch are stand alone products
- Sealed efficient, long life motors
- Anti-Airlock protection
- Exclusive moisture tight seals
- Marine grade blocked wiring

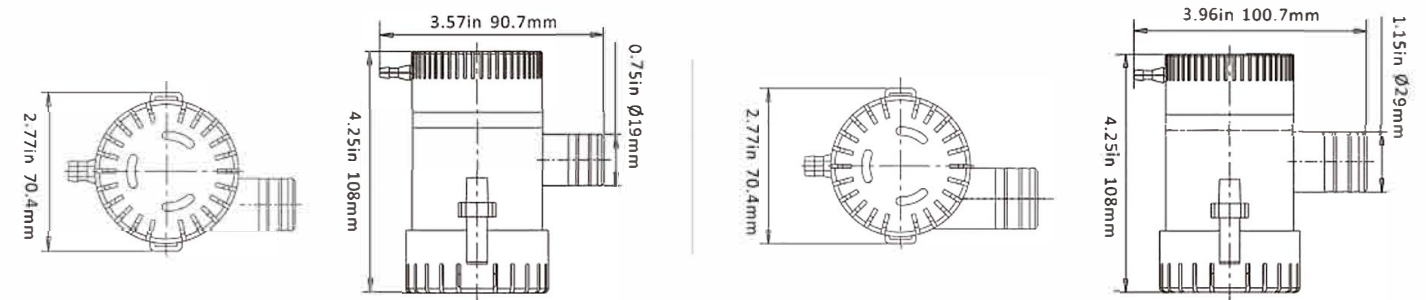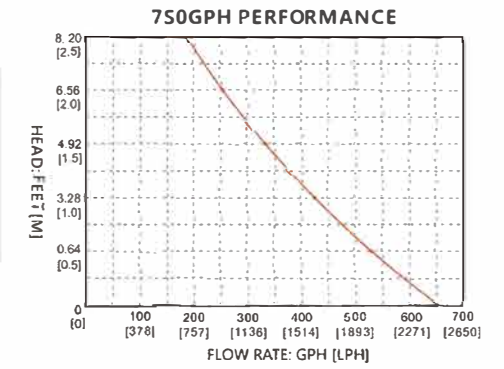

350 GPH-500 GPH-750 GPH

1100 GPH

**STANDARD PUMP CONFIGURATIONS**

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W
SFBP1-G350-01	350 GPH	12V	1.0A	3 m / 10'	1 m / 3'	19 mm/3/4"	0.33/0.40 kg
SFBP1-G500-01	500 GPH	12V	1.6A	3 m / 10'	1 m / 3'	19 mm/3/4"	0.33/0.40 kg
SFBP2-G500-01	500 GPH	24V	1.2A	3 m / 10'	1 m / 3'	19 mm/3/4"	0.33/0.40 kg
SFBP1-G750-01	750 GPH	12V	2.5A	3 m / 10'	1 m / 3'	19 mm/3/4"	0.33/0.40 kg
SFBP2-G750-01	750 GPH	24V	1.2A	3 m / 10'	1 m / 3'	19 mm/3/4"	0.33/0.40 kg
SFBP1-G1100-01	1100 GPH	12V	3.0A	4 m / 13'	1 m / 3'	29 mm/1-1/8"	0.38/0.44 kg
SFBP2-G1100-01	1100 GPH	24V	1.8A	4 m / 13'	1 m / 3'	29 mm/1-1/8"	0.38/0.44 kg





Blister



Box



Blister



Box






3000 GPH-3500 GPH

4700 GPH

**NON - AUTOMATIC BILGE PUMPS 01 SERIES 1500/2000 GPH**

**FEATURES**




- CE, RoHS, ISO 8846, ISO 8849 standards
- Traditional operation by switch or float switch
- Entirely Submersible
- Run dry capable for workloads
- Quiet operation
- Stainless steel shaft
- Snap-off strainer base for easy maintenance
- Pump and switch are stand alone products
- Sealed efficient, long life motors
- Anti-Airlock protection
- Exclusive moisture tight seals
- Marine grade blocked wiring

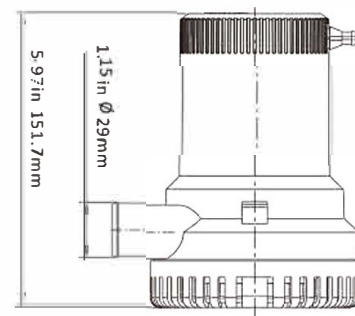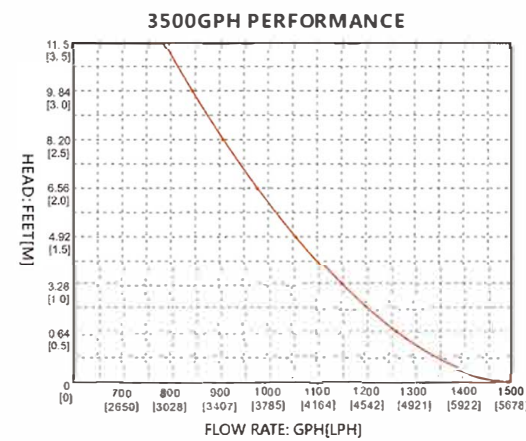



**NON - AUTOMATIC BILGE PUMPS 01 SERIES 3000/3500/4700 GPH**

**FEATURES**

- CE, RoHS, ISO 8846, ISO 8849 standards
- Traditional operation by switch or float switch
- Entirely Submersible
- Run dry capable for workloads
- Quiet operation
- Stainless steel shaft
- Snap-off strainer base for easy maintenance
- Pump and switch are stand alone products
- Sealed efficient, long life motors
- Anti-Airlock protection
- Exclusive moisture tight seals
- Marine grade blocked wiring

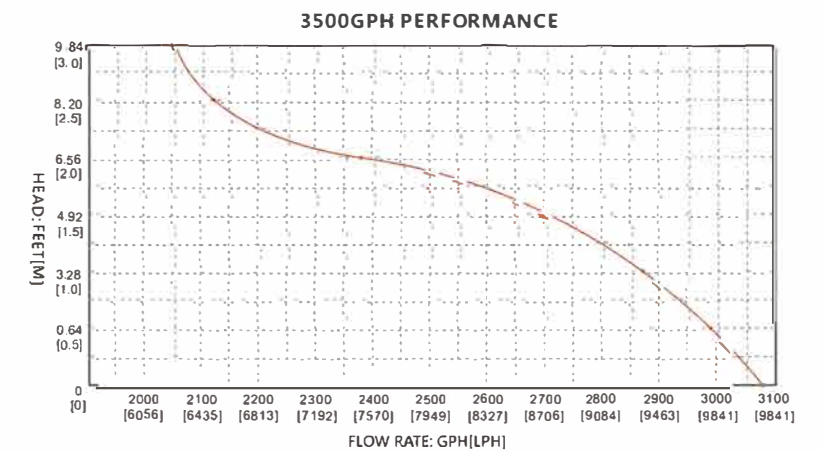

3000 GPH-3500 GPH



4700 GPH

**STANDARD PUMP CONFIGURATIONS**

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G1500-01	1500 GPH	12V	8.0A	5 m / 16'	1 m / 3'	29 mm / 1-1/8"	1.13 / 1.21 kg
SFBP2-G1500-01	1500 GPH	24V	4.0A	5 m / 16'	1 m / 3'	29 mm / 1-1/8"	1.13 / 1.21 kg
SFBP1-G2000-01	2000 GPH	12V	8.5A	6 m / 19'	1 m / 3'	29 mm / 1-1/8"	1.13 / 1.21 kg
SFBP2-G2000-01	2000 GPH	24V	5.0A	6 m / 19'	1 m / 3'	29 mm / 1-1/8"	1.13 / 1.21 kg

**STANDARD PUMP CONFIGURATIONS**

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G3000-01	3000 GPH	12V	14.0A	8 m / 26'	1 m / 3'	40 mm / 1-1/2"	2.10 / 2.37 kg
SFBP2-G3000-01	3000 GPH	24V	7.0A	8 m / 26'	1 m / 3'	40 mm / 1-1/2"	2.10 / 2.37 kg
SFBP1-G3500-01	3500 GPH	12V	16.0A	8 m / 26'	1 m / 3'	40 mm / 1-1/2"	2.10 / 2.37 kg
SFBP2-G3500-01	3500 GPH	24V	8.0A	8 m / 26'	1 m / 3'	40 mm / 1-1/2"	2.10 / 2.37 kg
SFBP1-G4700-01	4700 GPH	12V	17.0A	8 m / 26'	1 m / 3'	50 mm / 2"	2.10 / 2.37 kg








**NON - AUTOMATIC BILGE PUMPS 02/08 SERIES 350/600 GPH**

**FEATURES & BENEFITS**

- Pump and switch are stand alone products
- Compact, efficient, long life motors
- Size: 350, 600 gph in 12 volt version
- Easy clean snap-lock strainer bases
- Completely submersible
- Marine grade blocked wiring
- Quiet and vibrationless operation
- 18 AWG, 1m long leads

**MOTOR**

- Type**  
Compact, efficient, long life motor
- Temperature Limits**  
110°F (43°C) Max.
- Duty Cycle**  
Intermittent
- Voltage**  
12V / 24V

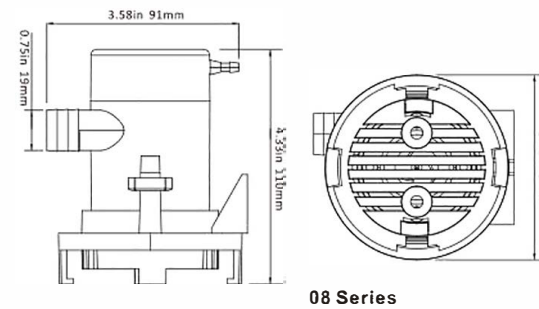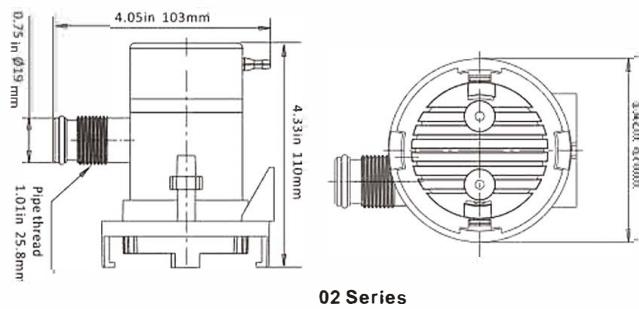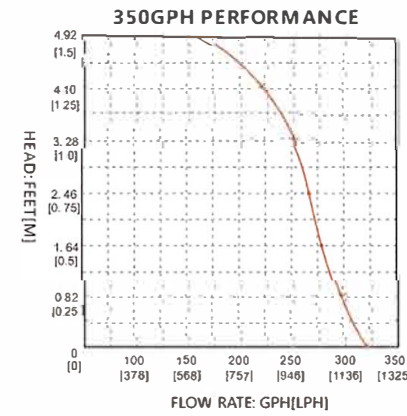

**STANDARD PUMP CONFIGURATIONS**

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G350-02	350 GPH	12V	1.0A	3 m / 10'	1 m / 3'	19 mm / 3/4"	0.33/0.40 kg
SFBP1-G600-02	600 GPH	12V	3.0A	3.5 m / 11.5'	1 m / 3'	19 mm / 3/4"	0.33/0.40 kg
SFBP1-G350-08	350 GPH	12V	1.0A	3 m / 10'	1 m / 3'	19 mm / 3/4"	0.22/0.28 kg
SFBP1-G600-08	600 GPH	12V	3.0A	3.5 m / 11.5'	1 m / 3'	19 mm / 3/4"	0.22/0.28 kg




**NON - AUTOMATIC BILGE PUMPS 03 SERIES 350/600/800 GPH**

**FEATURES & BENEFITS**

- Pump and switch are stand alone products
- Compact, efficient, long life motors
- Size: 350, 600, 800 gph in 12 volt version
- Easy clean snap-lock strainer bases
- Completely submersible
- Marine grade blocked wiring
- Quiet and vibrationless operation
- 18 AWG, 1m long leads

**MOTOR**

- Type**  
Compact, efficient, long life motor
- Temperature Limits**  
110°F (43°C) Max.
- Duty Cycle**  
Intermittent
- Voltage**  
12V / 24V

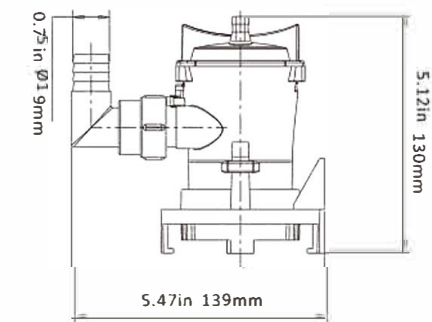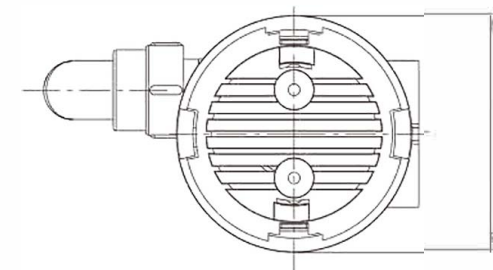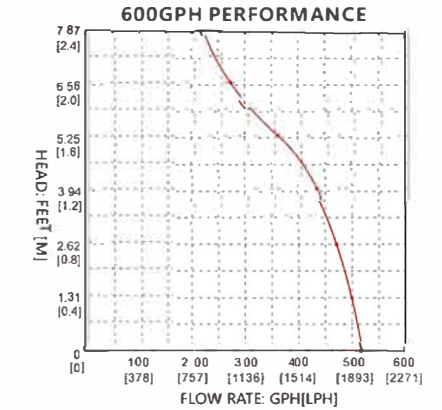

**STANDARD PUMP CONFIGURATIONS**

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G350-03	350 GPH	12V	1.0A	3.0 m / 10'	1 m / 3'	19 mm / 3/4"	0.37/0.46 kg
SFBP1-G600-03	600 GPH	12V	3.0A	3.5 m / 11.5'	1 m / 3'	19 mm / 3/4"	0.37/0.46 kg
SFBP1-G800-03	800 GPH	12V	4.0A	4.0 m / 13'	1 m / 3'	19 mm / 3/4"	0.37/0.46 kg





Blister



3/4" fitting



Blister



3/4" fitting





**LIVEWELL/BAITWELL PUMPS 04 SERIES 350/600/800 GPH**

**FEATURES & BENEFITS**

- Robust, easy click-in, replaceable motor
- Built-in through-hull
- Water cooled motor housing
- Flow: 350, 600 & 800 gph in 12 volt version
- Marine grade blocked wiring
- Stainless steel shaft
- Quiet and vibrationless operation
- 18 AWG, 1 m long Leads

**MOTOR**

- Type**  
Cartridge-Style, easy replace, long life motor
- Temperature Limits**  
110°F (43°C) Max.
- Duty Cycle**  
Intermittent
- Voltage**  
12v

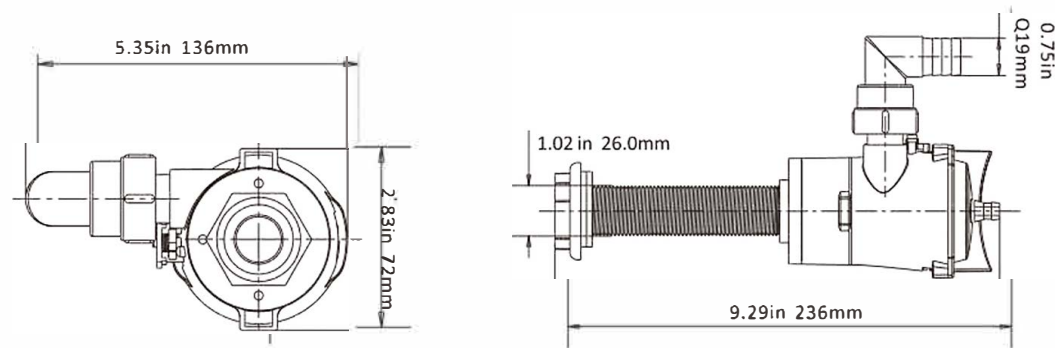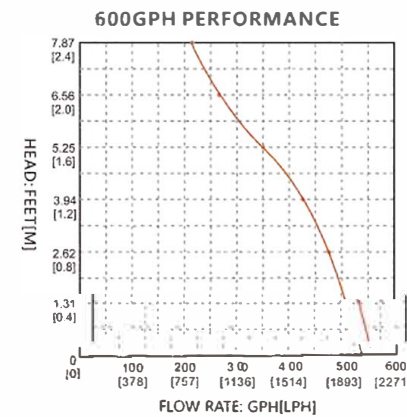



**LIVEWELL/BAITWELL PUMPS 05 SERIES 350/600/800 GPH**

**FEATURES & BENEFITS**

- Robust, easy click-in, replaceable motor
- Built-in through-hull
- Water cooled motor housing
- Flow: 350, 600 & 800 gph in 12 volt version
- Marine grade blocked wiring
- Stainless steel shaft
- Quiet and vibrationless operation
- 18 AWG, 1 m long Leads

**MOTOR**

- Type**  
Cartridge-Style, easy replace, long life motor
- Temperature Limits**  
110°F (43°C) Max.
- Duty Cycle**  
Intermittent
- Voltage**  
12v

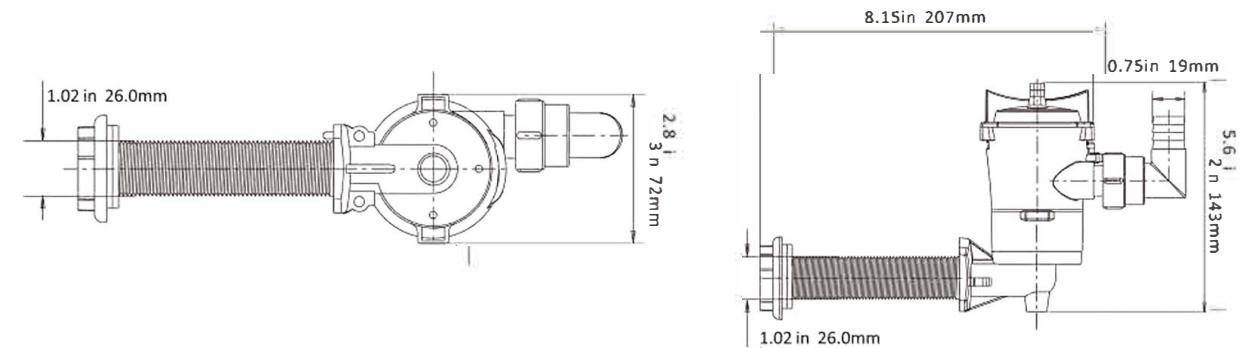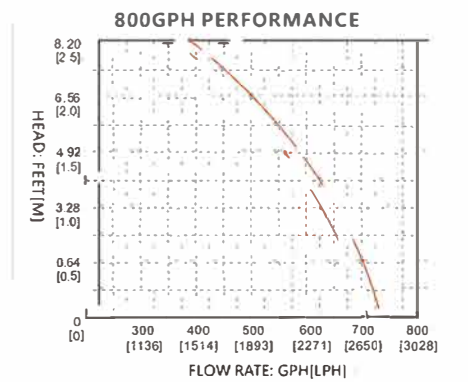

**STANDARD PUMP CONFIGURATIONS**

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G350-04	350 GPH	12V	1.0A	3.0 m / 10'	1 m / 3'	19 mm / 3/4"	0.4/0.5 kg
SFBP1-G600-04	600 GPH	12V	3.0A	3.5 m / 11.5'	1 m / 3'	19 mm / 3/4"	0.4/0.5 kg
SFBP1-G800-04	800 GPH	12V	4.0A	4.0 m / 13'	1 m / 3'	19 mm / 3/4"	0.4/0.5 kg

**STANDARD PUMP CONFIGURATIONS**

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G350-05	350 GPH	12V	1.0A	3.0 m / 10'	1 m / 3'	19 mm / 3/4"	0.42/0.58 kg
SFBP1-G600-05	600 GPH	12V	3.0A	3.5 m / 11.5'	1 m / 3'	19 mm / 3/4"	0.42/0.58 kg
SFBP1-G800-05	800 GPH	12V	4.0A	4.0 m / 13'	1 m / 3'	19 mm / 3/4"	0.42/0.58 kg





Blister  Box



Blister



**PORTABLE AERATOR KIT 350 GPH**

**FEATURES & BENEFITS**

- Aerates from 5 to 30 gallons (19 to 113 liters) of water.
- The SEAFLO 350 GPH (1325 LPH) pump attaches easily to any non-porous surface.
- 9.4" (240mm) long spray tube can be custom cut to fit into any container.
- A fully adjustable spray head increases or reduces flow of water.
- Foam filtration system keeps water sparkling clean.
- The kit also includes battery clips for easy attachment to your 12 volt power source.
- 18 AWG, 1 m long Leads

**MOTOR**


**Type**  
Compact, efficient, long life motor

**Temperature Limits**  
110°F (43°C) Max.

**Duty Cycle**  
Intermittent

**Voltage**  
12 V

**Standard Accessories**

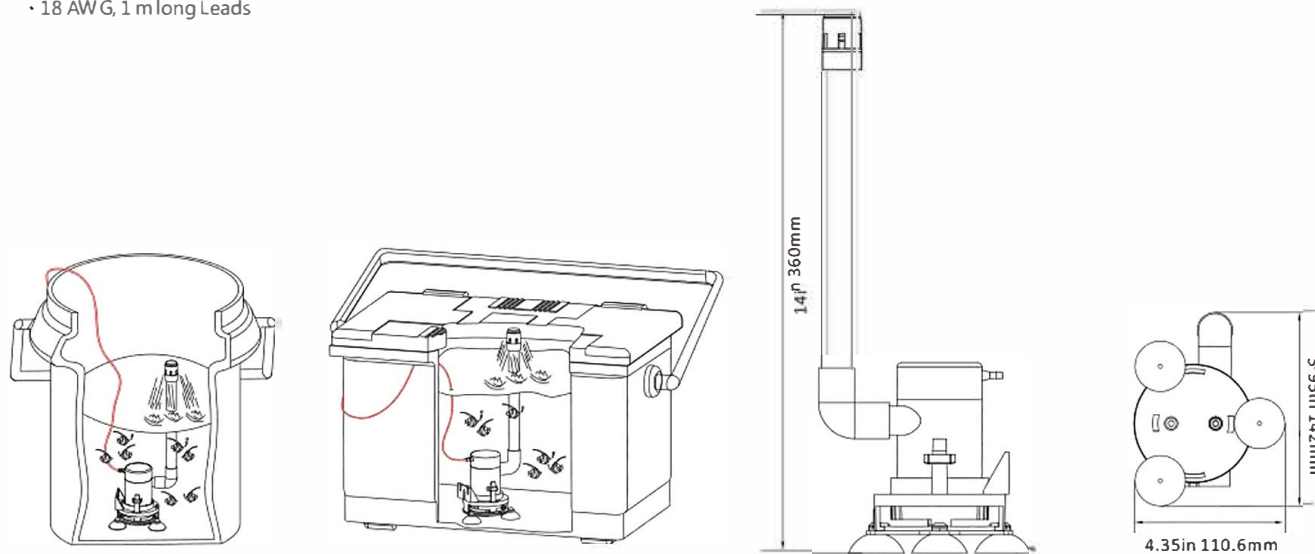

**STANDARD PUMP CONFIGURATIONS**

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G350-09	350 GPH	12 V	1.0 A	3 m / 10'	1 m / 3'	19 mm / 3/4"	0.32 / 0.42 kg

**PORTABLE AERATOR KIT 350 GPH**

**FEATURES & BENEFITS**

- Aerates from 5 to 30 gallons (19 to 113 liters) of water.
- The SEAFLO 350 GPH (1325 LPH) pump attaches easily to any non-porous surface.
- 6.3" (160mm) long spray tube, 13.8" (350mm) hosepipe can be custom cut to fit into any container.
- A fully adjustable spray head increases or reduces flow of water.
- Foam filtration system keeps water sparkling clean.
- The kit also includes battery clips for easy attachment to your 12 volt power source.
- 18 AWG, 1 m long Leads

**MOTOR**


**Type**  
Compact, efficient, long life motor

**Temperature Limits**  
110°F (43°C) Max.

**Duty Cycle**  
Intermittent

**Voltage**  
12 V

**Standard Accessories**

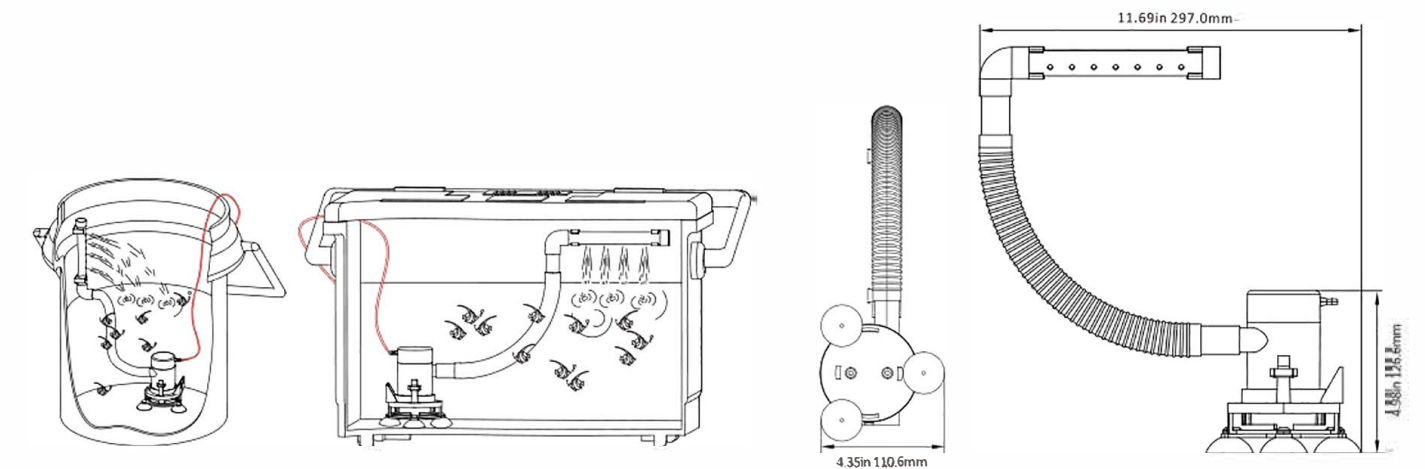

**STANDARD PUMP CONFIGURATIONS**

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G350-10	350 GPH	12 V	1.0 A	3 m / 10'	1 m / 3'	19 mm / 3/4"	0.32 / 0.42 kg





Blister



PE bag



12 LPM

16 LPM

## LIVE BAIT AIR PUMP

### Features & Benefits


- Quite DC motor suitable for night fishing
- Adjustable stainless steel clip for live bait bucket
- Unbreakable air-stone & flexible air-hose included
- Impact-resistant and water-resistant ABS case
- Diaphragm type motor smooth airing system
- Built-in rechargeable lithium battery, cycle life up to 500 times
- Less than 100 ma, more the 24 hours oxygen supply after full charge

### Application

Keeping fishes alive when fishing outdoors, or for use in case of aquarium electricity power failure

### MOTOR

**Wire length**  
1.3 m  
**Voltage**  
5 V

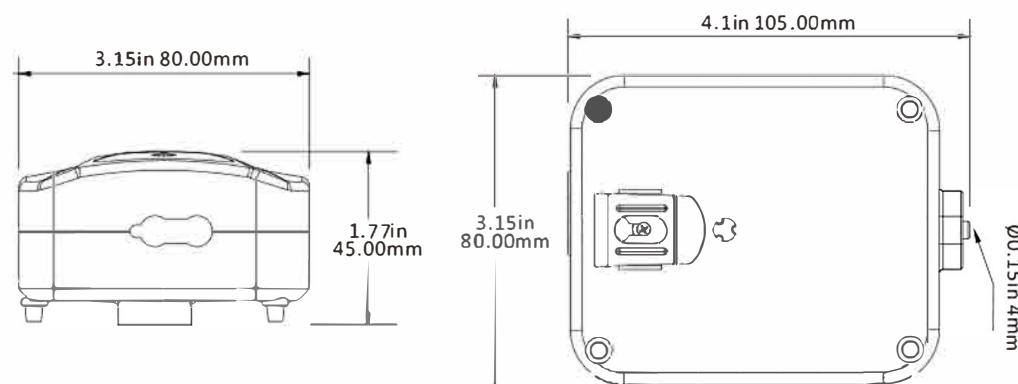

### Standard Accessories



### STANDARD PUMP CONFIGURATIONS

Model	Voltage	Max Amp Draw	Displacement	Air Pressure	Intake	Max pressure	Hose	Wire
SFAP1-005-015-01	5V	100 ma	2 L/min	0.015 MPa	5 mm	0.5 MPa	4 mm	USB-DC

## LOW VOLTAGE SUBMERSIBLE PUMP 12/16 LPM

### FEATURES & BENEFITS




- Pumps up to 18 vertical feet
- 1/2" Outlet
- Ideal for backup battery sump
- Quiet and vibrationless operation
- Completely submersible
- 18 AWG, 1 m long Leads

### PUMP

**Priming Capabilities**  
Flooded suction  
**Power**  
2.8 amps max current draw  
**Flow**  
3.2 & 5.0 GPM Models Available

### MOTOR

**Type**  
Compact, efficient, long life motor  
**Temperature Limits**  
110°F (43°C) Max.  
**Duty Cycle**  
Intermittent (30 minutes)

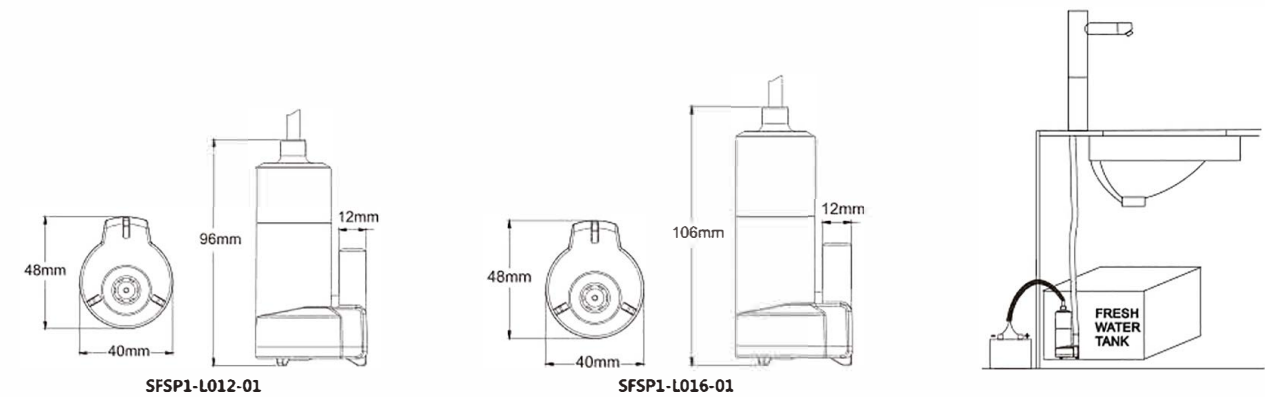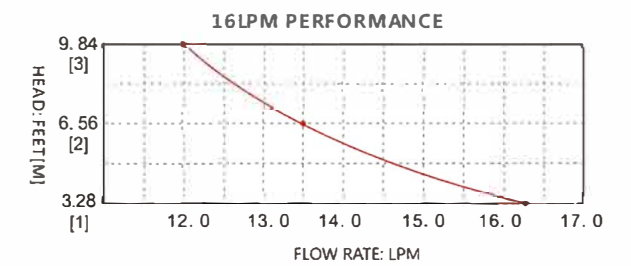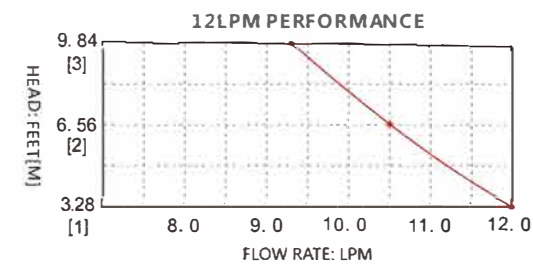

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	Max Amps	Flow rate	Bar	Head	Wire Leads	Outlet Dia.	N.W./G.W.
SFSP1-L012-01	12 V	2.0 A	12 LPM	0.6 bar	6 m / 19.7'	1 m / 3'	12 mm / 1/2"	0.16 / 0.18 kg
SFSP1-L016-01	12 V	4.0 A	16 LPM	0.6 bar	6 m / 19.7'	1 m / 3'	12 mm / 1/2"	0.24 / 0.26 kg








**SUBMERSIBLE AND LINE PUMP 280/500 GPH**

**Features & Benefits**

- Able to pump 40°C diesel, 80°C sea water
- Able to run about 20 minutes
- Portable to carry on
- Easy installation
- Intermittent duty
- "A" refers to 5m leads with clip, "B" refers to 1m leads

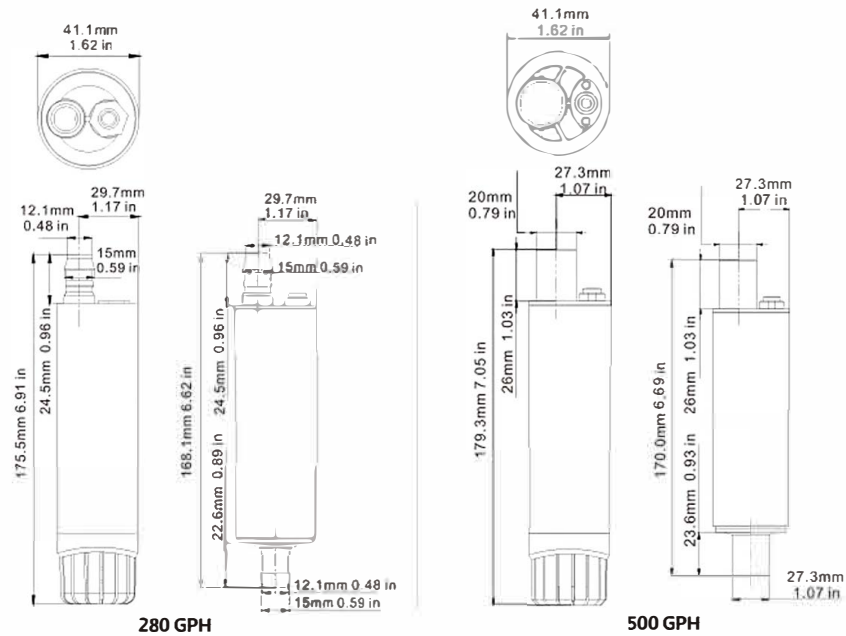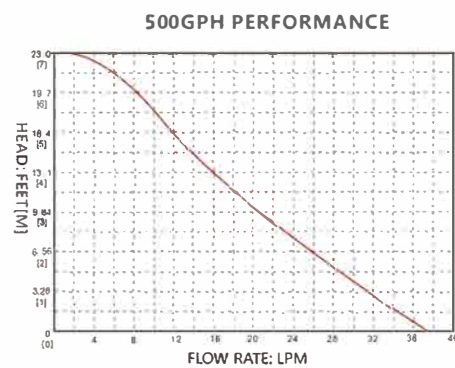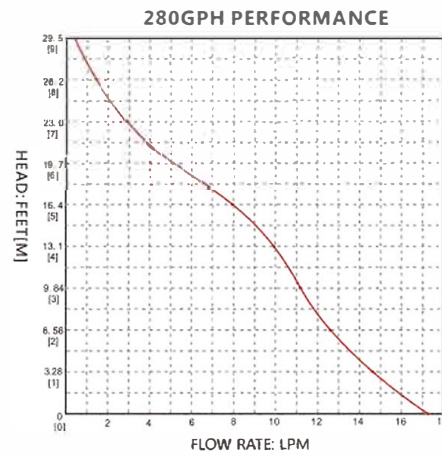



**STANDARD PUMP CONFIGURATIONS**

Model	Flow Rate	Voltage	Max Draw	Fuse Amps	Head	Wire Lead	Outlet Dia.
SFSP1-G280-02A	280 GPH	12 V	4.5 A	7.5 A	10 m / 32'	5 m / 16'	1/2"
SFSP1-G280-02B	280 GPH	12 V	4.5 A	7.5 A	10 m / 32'	1 m / 3'	1/2"
SFSP1-G500-02A	500 GPH	12 V	4.5 A	7.5 A	10 m / 32'	5 m / 16'	3/4"
SFSP1-G500-02B	500 GPH	12 V	4.5 A	7.5 A	10 m / 32'	1 m / 3'	3/4"

**SUBMERSIBLE AND LINE PUMP 200 GPH**


**Features & Benefits**

- Able to pump 80°C sea water
- Able to run about 20 minutes
- Portable to carry on
- Easy installation
- Intermittent duty

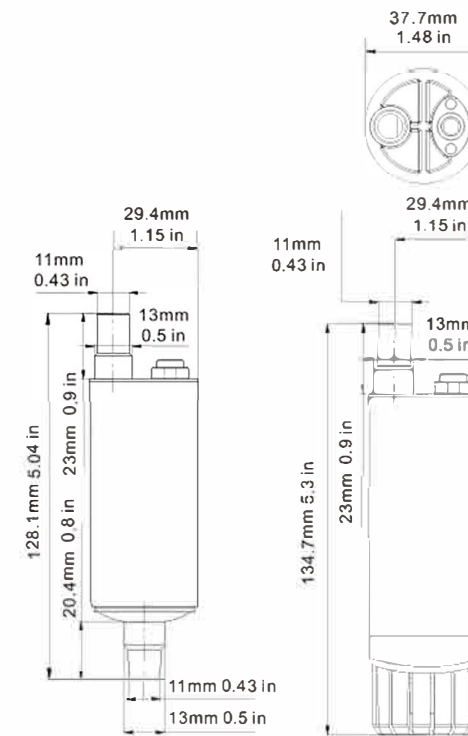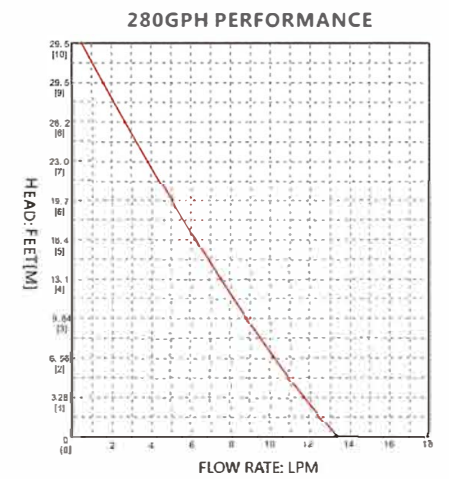

**STANDARD PUMP CONFIGURATIONS**

Model	Flow Rate	Voltage	Max Draw	Fuse Amps	Head	Wire Lead	Outlet Dia.
SFSP1-G200-03B	200 GPH	12 V	4.5 A	7.5 A	10 m / 32'	1 m / 3'	3/8" / 1/2"

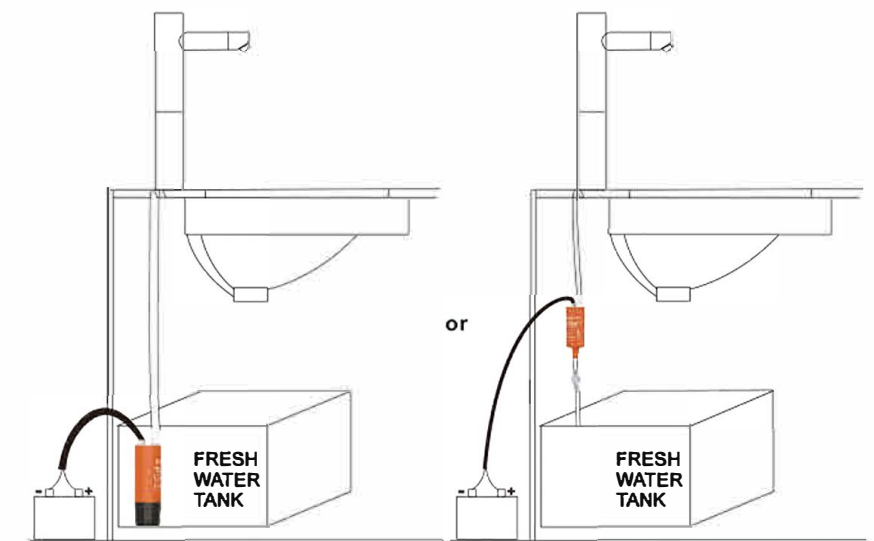



## 2/3-WAY SWITCH PANEL

### Features & Benefits

- Black aluminum panel
- Control any pump equipped with a float switch
- Prevent impact of intermittent high current
- Toggle of SFSP-01 has three positions (automatic, off, or manual)
- Toggle of SFSP-02 has "on" and "off" providing fingertip control



Blister

## 3-WAY SWITCH PANEL


### Features & Benefits

- LED indicator when switch is on
- Control any pump equipped with a float switch
- Prevent impact of intermittent high current
- Toggle has three positions (automatic, off, or manual)
- SFSP-015-01 is black aluminum panel
- SFSP-015-02 is black plastic panel




Blister

Blister

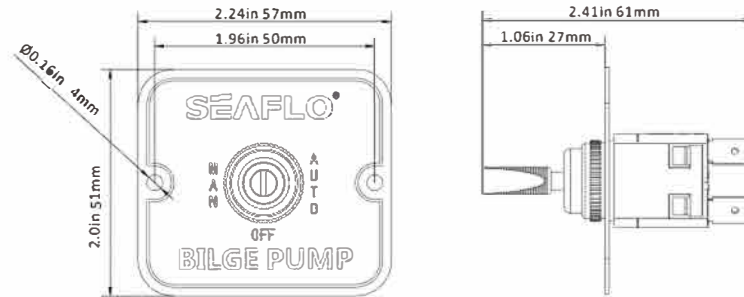


### STANDARD PUMP CONFIGURATIONS

Model	Volts	Led Light	Panel Material	Position	Weight	Dimension
SFSP-01	12 V & 24 V	Yes	Aluminum	MAN-OFF-AUTO	45g	57mm*51mm

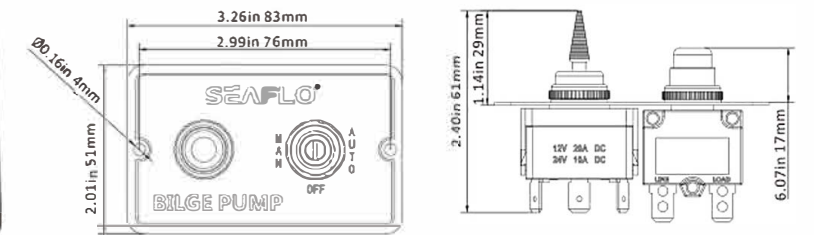


### STANDARD PUMP CONFIGURATIONS

Model	Volts	Fuel	Led Light	Panel Material	Position	Weight	Dimension
SFSP-015-01	12 V & 24 V	15 A	Yes	Aluminum	MAN-OFF-AUTO	60g	83mm*51mm

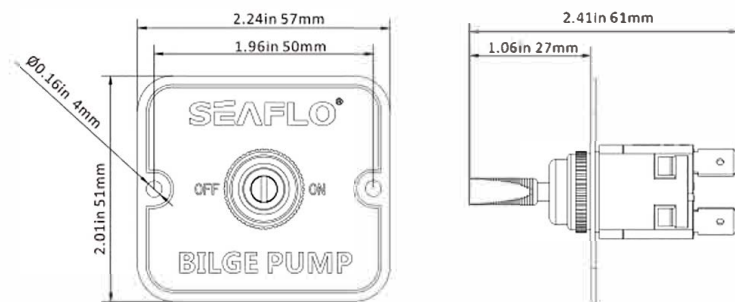

### STANDARD PUMP CONFIGURATIONS

Model	Volts	Led Light	Panel Material	Position	Weight	Dimension
SFSP-02	12 V & 24 V	Yes	Aluminum	OFF-ON	45g	57mm*51mm

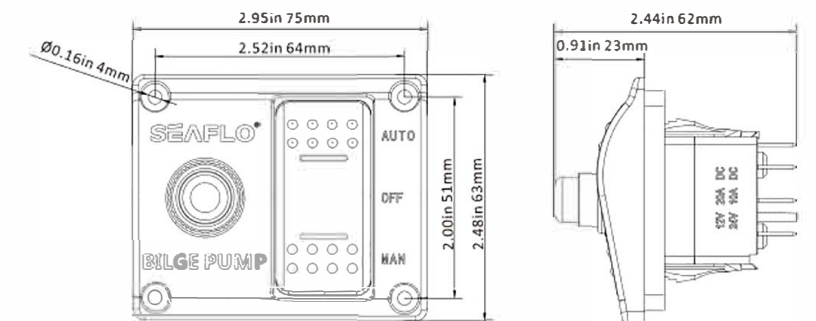

### STANDARD PUMP CONFIGURATIONS

Model	Volts	Fuel	Led Light	Panel Material	Position	Weight	Dimension
SFSP-015-02	12 V & 24 V	15 A	Yes	Plastic	MAN-OFF-AUTO	62g	75mm*63mm






Blister  Box





Blister  Box

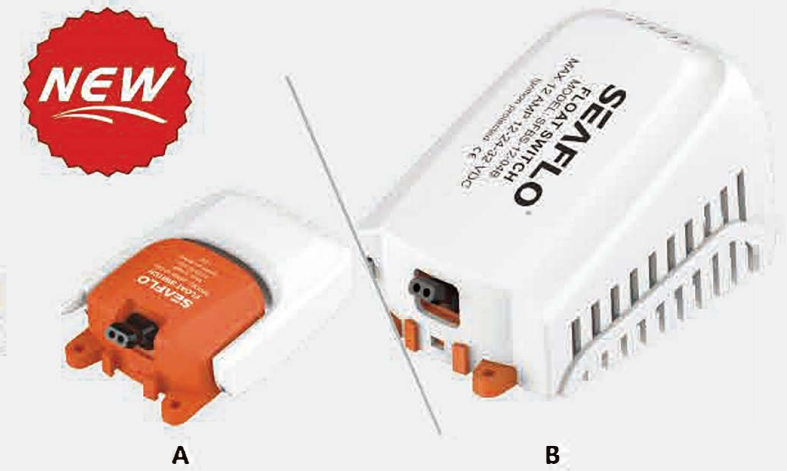

### FLOAT SWITCH 03 SERIES 25A

#### Features & Benefits



- Amp draws up to 25A
- Idea flow sensor for bilge pump
- Mercury free
- Compact design, easy installation
- With Filter housing to prevent from debris for the B
- Turn on when water level higher than 45-55mm(1.77"-1.97")
- Turn off when water level lower than 20-25mm(0.79"-0.98")

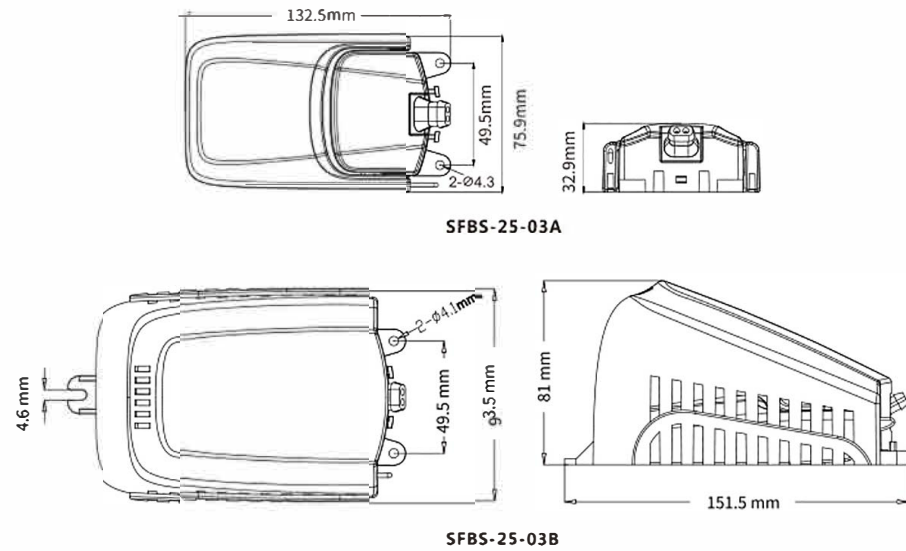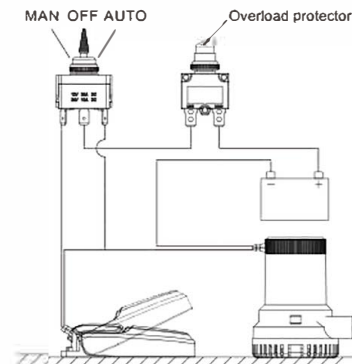

### FLOAT SWITCH 04 SERIES 12A

#### Features & Benefits

- Amp draws up to 12A
- Idea flow sensor for bilge pump
- Mercury free
- Compact design, easy installation
- With Filter housing to prevent from debris for the B
- Turn on when water level higher than 45-55mm(1.77"-1.97")
- Turn off when water level lower than 20-25mm(0.79"-0.98")

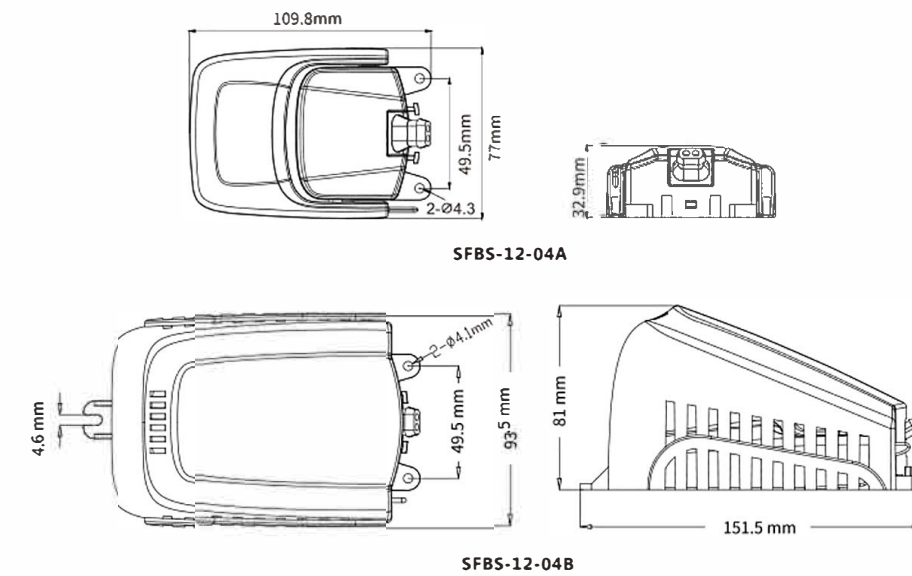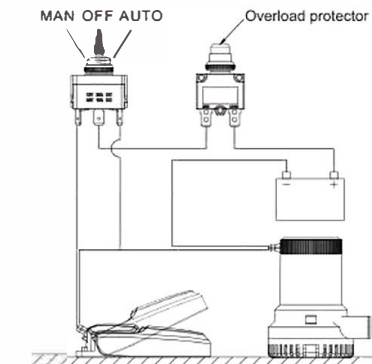

#### STANDARD PUMP CONFIGURATIONS

Model	Max Amps	Wire Gauge Size	Wire Lead	N.W.	Filter Housing
SFBS-25-03A	25 A	14 AWG	1 M	120 G	NO
SFBS-25-03B	25 A	14 AWG	1 M	190 G	YES

#### STANDARD PUMP CONFIGURATIONS

Model	Max Amps	Wire Gauge Size	Wire Lead	N.W.	Filter Housing
SFBS-12-04A	12 A	16 AWG	1 M	105 G	NO
SFBS-12-04B	12 A	16 AWG	1 M	175 G	YES





01 Series

02 Series



01

02

Blister



Box



## FLOAT SWITCH 01/02 SERIES


### Features & Benefits

#### 01 Series



- Ideal flow sensor for bilge pumps
- 20A Max.
- Heavy duty flow switch is designed for the toughest applications
- Turns pump on when water level reaches 2.0" (51mm)

#### 02 Series


- Ideal flow sensor for bilge pumps
- 18A Max.
- Unique internal steel bearing activation
- Turns pump on when water level reaches 2.3" (60mm)

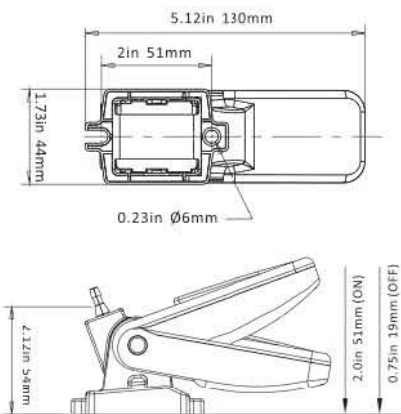

SFBS-20-01

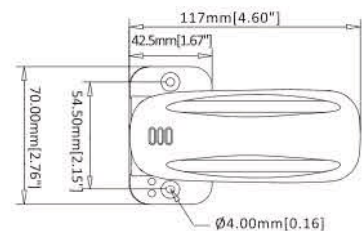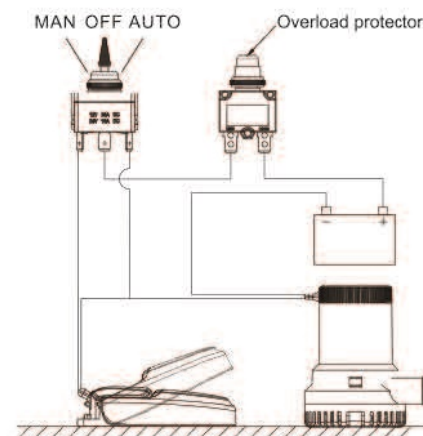

SFBS-18-02

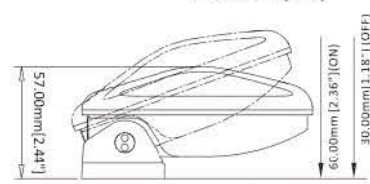

Model	SFBS-20-01
Max Amps 12volts	20A
Max Amps 24volts	10A
Wire Length	1 m
Wire Gauge Size	18
N.W./G.W. (kg)	0.16/0.18

Model	SFBS-18-02
Max Amps 12volts	18A
Max Amps 24volts	8A
Wire Length	1 m
Wire Gauge Size	16
N.W./G.W. (kg)	0.14/0.18

## DEEP WELL SOLAR SUBMERSIBLE PUMP

### Features & Benefits

- Designed to be used with solar panels or a 24v battery system
- Easy hook up to most any existing solar panels or wind generator systems
- For 4" wells or larger
- Runs dry without damage
- Water blocked cable connector
- Accepts a variety of jacketed cables
- 16 AWG, 2 meters (6.7 feet) long leads

### PUMP

#### Inlet / Outlet



Intake: 50 mesh stainless steel filter  
Outlet: 1/2" (12.7mm) barb

#### Weight:

7.6 lbs (3.45 kg)

#### Type

DC permanent magnet motor;  
with thermal protection

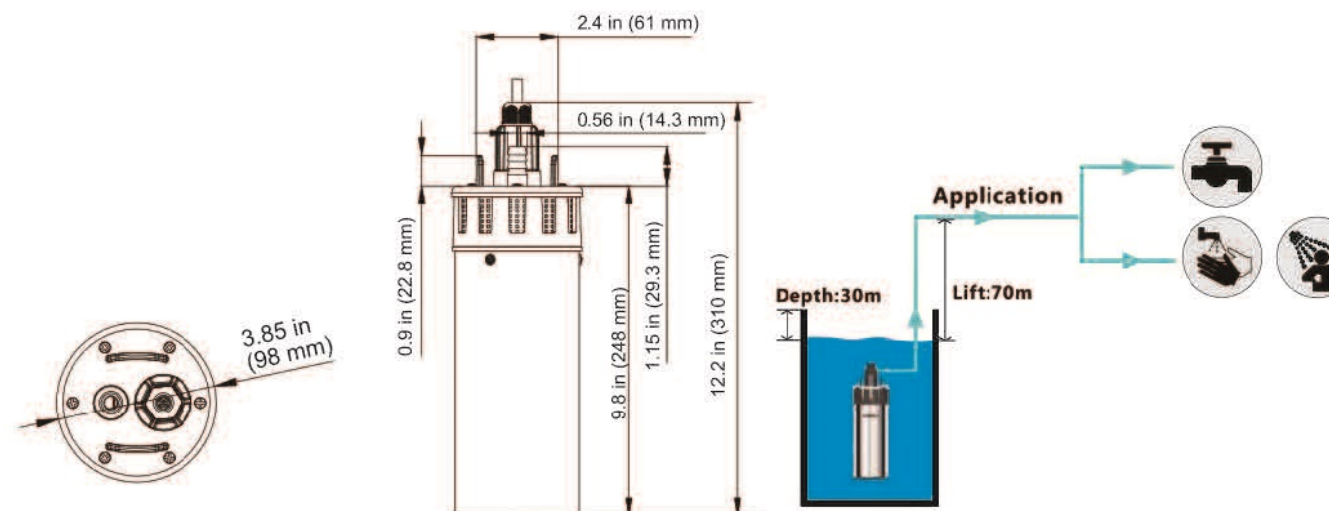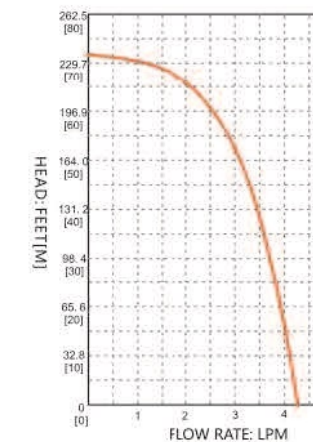

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	Max Draw(A)	Fuse	Max Diving depth	Max Lift	Inlet / outlet	Open flow
SFDP2-G103-01	24 V	6.0 A	8.0 A	100 feet (30 m)	230 feet (70 m)	50 mesh stainless steel filter / 1/2" (12.7mm) barb	6.5 LPM±5%





Box  Industry Carton



Box  Industry Carton

## FRESH WATER PUMP 21 SERIES




### FEATURES & BENEFITS

- Capable of supplying 1-2 fixtures
- Compact design
- On- demand pressure switch
- Adjustable pressure setting
- Can run dry
- Quiet operation
- Industry standard mounting pattern
- 18 AWG, 13" long Leads

### PUMP

- Max Recommended Temperature**  
110°F (43°C) Max.
- Priming Capabilities**  
4 feet (1.2 m) suction lift
- Inlet/Outlet Ports**  
3/8" hose barb  
(Custom O-Ring Outlets available)
- Weight**  
1.25 lbs (0.57 kg)

### PERFORMANCE

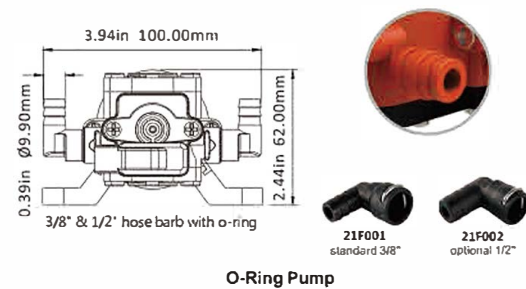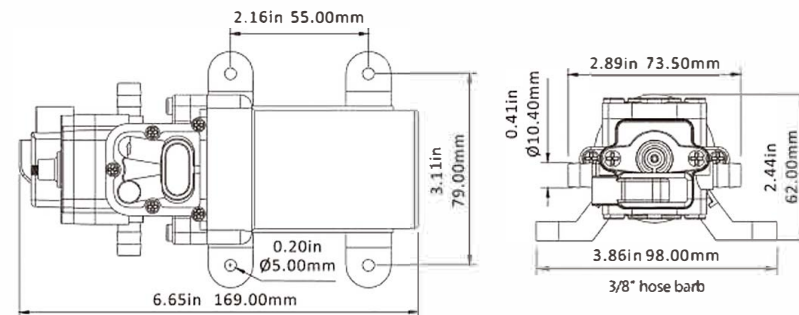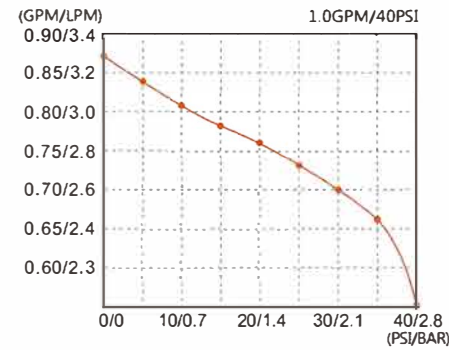

O-Ring Pump

### STANDARD PUMP CONFIGURATIONS (Inquire about other configurations, or valve and diaphragm materials)

Model	Voltage	GPM/LPM	Control Type	Amps	PSI/BAR	Valves	Diaphragm	Ports
SFDP1-010-040-21	12V	1.0/3.8	Switch	4.0 MAX	40/2.8	EPDM	Santoprene	3/8" Barb (or Custom O-Ring)
SFDP2-010-040-21	24V	1.0/3.8	Switch	2.0 MAX	40/2.8	EPDM	Santoprene	3/8" Barb (or Custom O-Ring)
SFDP1-011-070-21	12V	1.1/4.0	Switch	4.0 MAX	70/4.8	EPDM	Santoprene	3/8" Barb (or Custom O-Ring)
SFDP1-012-035-21	12V	1.2/4.3	Switch	4.0 MAX	35/2.4	EPDM	Santoprene	3/8" Barb (or Custom O-Ring)
SFDP2-012-035-21	24V	1.2/4.3	Switch	2.0 MAX	35/2.4	EPDM	Santoprene	3/8" Barb (or Custom O-Ring)

## FRESH WATER PUMP 22 SERIES




### FEATURES & BENEFITS

- Capable of supplying 1-2 fixtures
- By-pass technology reduces cycling
- On- demand pressure switch
- Adjustable pressure setting
- Capable of up to 100PSI
- Can run dry
- Quiet operation
- 18 AWG, 9.5" long Leads

### PUMP

- Max Recommended Temperature**  
110°F (43°C) Max.
- Priming Capabilities**  
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**  
3/8" hose barb  
(Custom O-Ring Outlets available)
- Weight**  
2.6 lbs (1.18 kg)

### PERFORMANCE

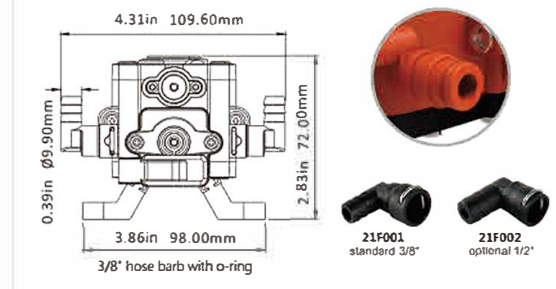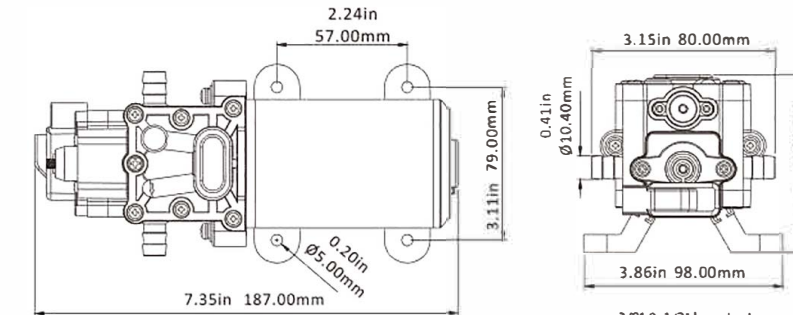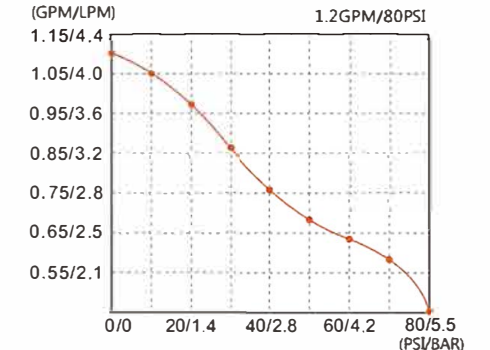

O-Ring Pump

### STANDARD PUMP CONFIGURATIONS (Inquire about other configurations, or valve and diaphragm materials)

Model	Voltage	GPM/LPM	Control Type	Amps	PSI/BAR	Valves	Diaphragm	Ports
SFDP1-013-060-22	12V	1.3/5.0	Switch & By pass	5.0 MAX	60/4.1	EPDM	Santoprene	3/8" Barb (or Custom O-Ring)
SFDP2-013-060-22	24V	1.3/5.0	Switch & By pass	2.5 MAX	60/4.1	EPDM	Santoprene	3/8" Barb (or Custom O-Ring)
SFDP1-013-100-22	12V	1.3/5.0	Switch & By pass	6.0 MAX	100/6.9	EPDM	Santoprene	3/8" Barb (or Custom O-Ring)
SFDP2-013-100-22	24V	1.3/5.0	Switch & By pass	3.0 MAX	100/6.9	EPDM	Santoprene	3/8" Barb (or Custom O-Ring)
SFDP1-014-080-22	12V	1.4/5.1	Switch & By pass	5.5 MAX	80/5.5	EPDM	Santoprene	3/8" Barb (or Custom O-Ring)





Box  Industry Carton



Box  Industry Carton






## FRESH WATER PUMP 31 SERIES

### FEATURES & BENEFITS

- Continuous Duty
- Up to 1.8 GPM
- Self priming
- Run dry safe
- Quiet operation
- On-demand use
- Industry Standard mounting pattern
- Adjustable pressure switch
- 16 AWG, 4.5" long Leads

### PUMP

- Max Recommended Temperature**  
140°F (60°C) Max.
- Priming Capabilities**  
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**  
3/8"-18 FNPT
- Weight**  
5.0 lbs (2.28 kg)

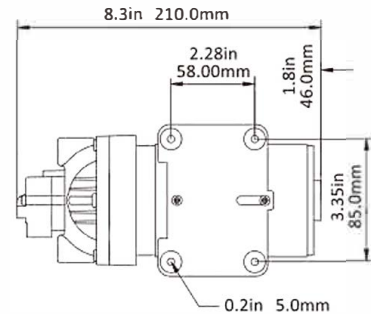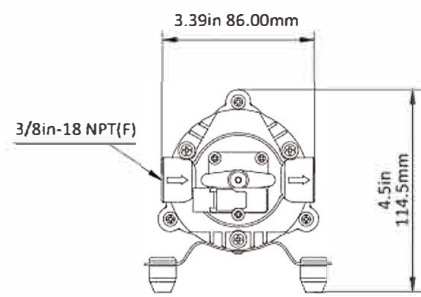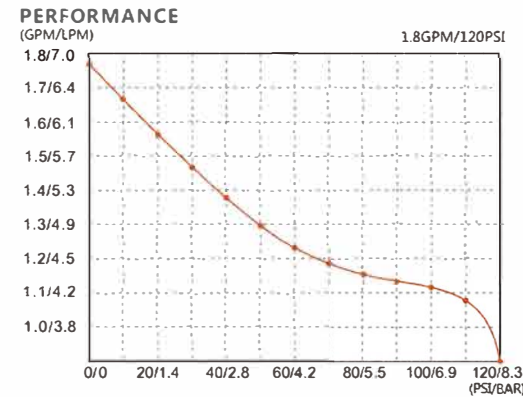

High Rubber Feet Metal Plate

### Standard Accessories



More details please refer to page 71.

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-015-080-31	12V	Switch	1.5/5.5	80/5.5	8.0	EPDM	Santoprene	3/8"-18 FNPT	2-Pin/Leads
SFDP2-015-080-31	24V	Switch	1.5/5.5	80/5.5	4.5	EPDM	Santoprene	3/8"-18 FNPT	2-Pin/Leads
SFDP1-018-080-31	12V	Switch	1.8/7.0	80/5.5	9.0	EPDM	Santoprene	3/8"-18 FNPT	2-Pin/Leads
SFDP2-018-080-31	24V	Switch	1.8/7.0	80/5.5	4.5	EPDM	Santoprene	3/8"-18 FNPT	2-Pin/Leads


## FRESH WATER PUMP 33 SERIES

### FEATURES & BENEFITS

- Capable of supplying 2-3 fixtures
- Up to 3.0 GPM
- Self priming
- Run dry safe
- Quiet operation
- On-demand use
- Industry Standard mounting pattern
- Completely rubber mounting-base
- Adjustable pressure switch
- 16 AWG, 4.5" long Leads

### PUMP



- Max Recommended Temperature**  
140°F (60°C) Max.
- Priming Capabilities**  
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**  
1/2"-14 MNPT
- Weight**  
3.97 lbs (1.80kg)

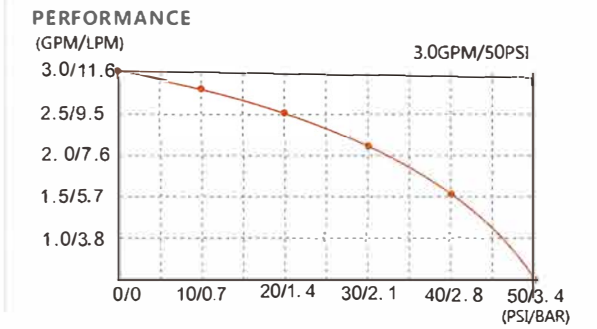

### Standard Accessories



More details and other optional accessories please refer to page 71-72.

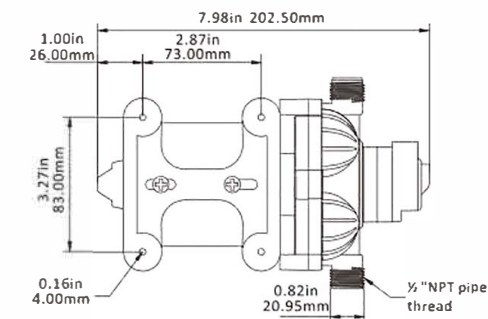

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-030-045-33	12V	Switch	3.0/11.6	45/3.1	8.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP2-030-045-33	24V	Switch	3.0/11.6	45/3.1	4.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP1-028-045-33	12V	Switch	2.8/10.6	45/3.1	6.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP2-028-045-33	24V	Switch	2.8/10.6	45/3.1	3.5	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads





Box  Industry Carton



Box  Industry Carton




## FRESH WATER PUMP 34 SERIES

### FEATURES & BENEFITS

- Continuous Duty
- Up to 2.2 GPM
- Self priming
- Run dry safe
- Quiet operation
- On-demand use
- Industry Standard mounting pattern
- Adjustable pressure switch
- Up to 100 PSI
- 18 AWG, 4.5" long Leads

### PUMP


- Max Recommended Temperature**  
140°F (60°C) Max.
- Priming Capabilities**  
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**  
1/2"-14 MNPT
- Weight**  
4.7 lbs (2.16 kg)

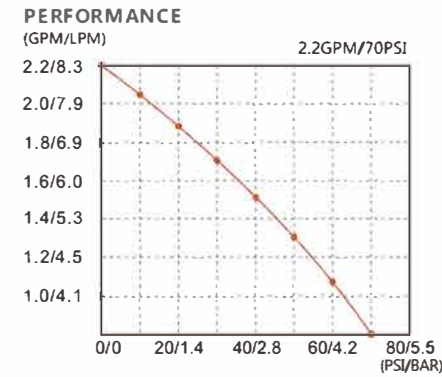

### Standard Accessories



More details and other optional accessories please refer to page 71-72.

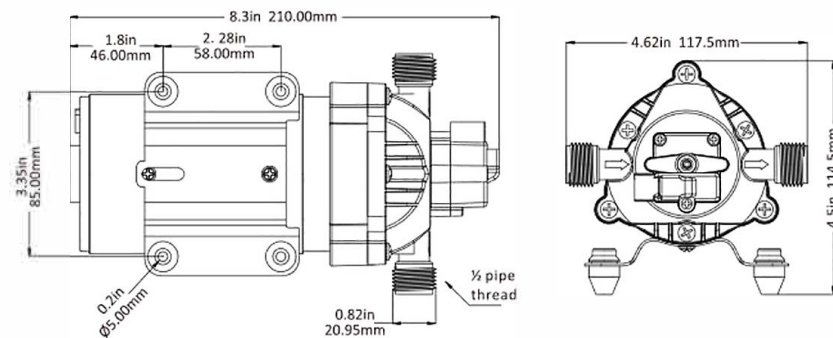

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw (A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-022-070-34	12V	Switch	2.2/8.3	70/4.8	7.5	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP2-022-070-34	24V	Switch	2.2/8.3	70/4.8	4.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP1-016-100-34	12V	Switch	1.6/6.0	100/6.9	6.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP2-016-100-34	24V	Switch	1.6/6.0	100/6.9	4.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads


## FRESH WATER PUMP 35 SERIES

### FEATURES & BENEFITS

- Continuous Duty
- Up to 1.8 GPM
- Self priming
- Quick connect clip-in fittings
- Run dry safe
- Quiet operation
- On-demand use
- Industry standard mounting pattern
- Adjustable pressure switch
- 18 AWG, 4.5" long Leads

### PUMP


- Max Recommended Temperature**  
140°F (60°C) Max.
- Priming Capabilities**  
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**  
Quick Attach w/ Multiple Fitting Options
- Weight**  
5.7 lbs (2.6 kg)

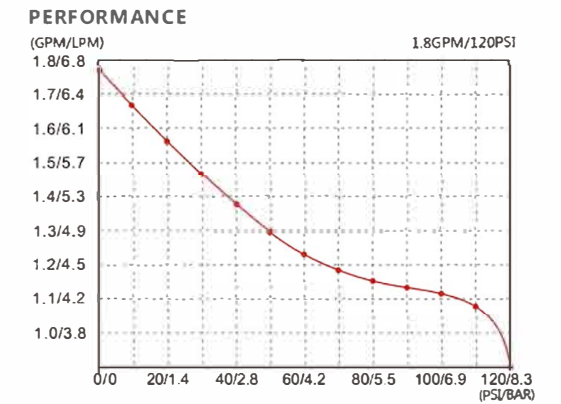

### Standard Accessories



More details and other optional accessories please refer to page 71-72.

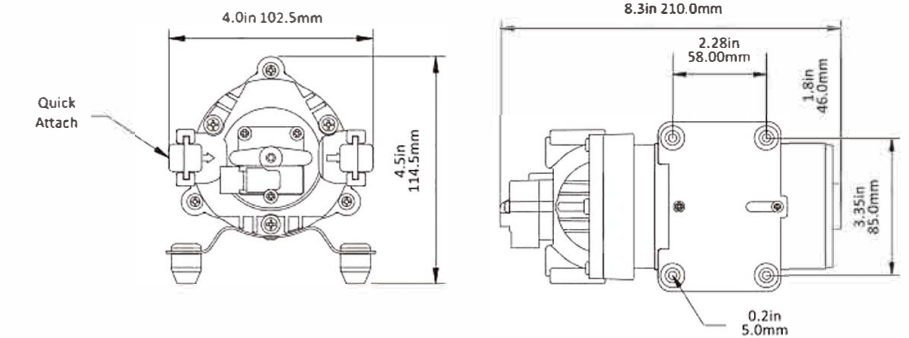

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw (A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-015-080-35	12V	Switch	1.5/5.5	80/5.5	8.0	EPDM	Santoprene	5/8" Quick Attach	2-Pin/Leads
SFDP2-015-080-35	24V	Switch	1.5/5.5	80/5.5	4.5	EPDM	Santoprene	5/8" Quick Attach	2-Pin/Leads
SFDP1-018-080-35	12V	Switch	1.8/7.0	80/5.5	9.0	EPDM	Santoprene	5/8" Quick Attach	2-Pin/Leads
SFDP2-018-080-35	24V	Switch	1.8/7.0	80/5.5	4.5	EPDM	Santoprene	5/8" Quick Attach	2-Pin/Leads





Box  Industry Carton



Box  Industry Carton



## FRESH WATER PUMP 36 SERIES




### FEATURES & BENEFITS

- Positive displacement pump
- Can run dry
- Quiet operation
- By Pass Pump
- Industry standard mount pattern
- 16 AWG, 19.5" long Leads

### PUMP

- Max Recommended Temperature**  
110°F (43°C) Max.
- Priming Capabilities**  
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**  
3/8"-18 FNPT
- Weight**  
5.2 lbs (2.35 kg)

### PERFORMANCE

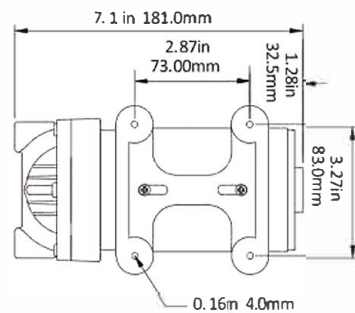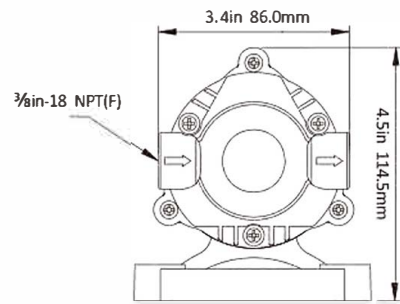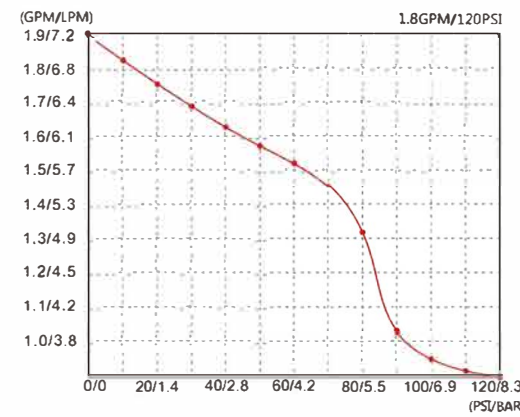

### STANDARD PUMP CONFIGURATIONS

Model	Switch	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Voltage	Wire Connections
SFDP1-015-120-36	By Pass	1.5/5.5	120/8.3	10.0	EPDM	Santoprene	3/8"-18 FNPT	12V	2-Pin/Leads
SFDP2-015-120-36	By Pass	1.5/5.5	120/8.3	5.0	EPDM	Santoprene	3/8"-18 FNPT	24V	2-Pin/Leads
SFDP1-018-120-36	By Pass	1.8/7.0	120/8.3	12.0	EPDM	Santoprene	3/8"-18 FNPT	12V	2-Pin/Leads
SFDP2-018-120-36	By Pass	1.8/7.0	120/8.3	6.0	EPDM	Santoprene	3/8"-18 FNPT	24V	2-Pin/Leads
SFDP1-015-120-36	By Pass	1.5/5.5	120/8.3	0.8	EPDM	Santoprene	3/8"-18 FNPT	110V	Leads
SFDP2-015-120-36	By Pass	1.5/5.5	120/8.3	0.5	EPDM	Santoprene	3/8"-18 FNPT	220V	Leads

## FRESH WATER PUMP 41 SERIES(Short)




### FEATURES & BENEFITS

- Up to 3.3 GPM
- Can supply up to 3 fixtures
- Quick-Connect fittings
- Self priming
- Run dry safe
- On-demand use
- Industry Standard mounting pattern
- Rubber mounting-feet
- Can be used for Fresh & Salt Water
- 16 AWG, 45" long Leads

### PUMP

- Max Recommended Temperature**  
140°F (60°C) Max.
- Priming Capabilities**  
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**  
Quick Attach
- Weight**  
4.0 lbs (1.80 kg)

### PERFORMANCE

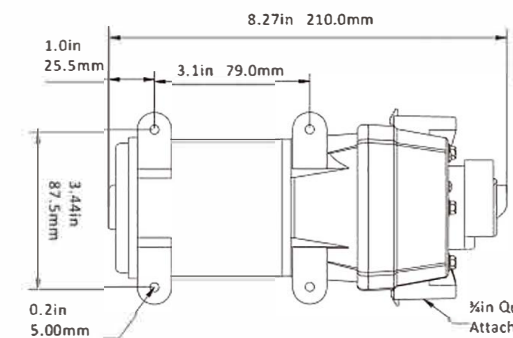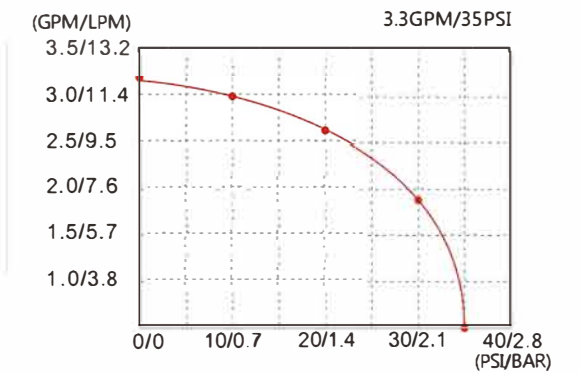

### Standard Accessories



More details and other optional accessories please refer to page 71-72.

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-027-017-41	12V	Switch & By pass	2.7/10.0	17/1.2	4.5	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-027-017-41	24V	Switch & By pass	2.7/10.0	17/1.2	2.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP1-033-035-41	12V	Switch & By pass	3.3/12.5	35/2.4	8.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-033-035-41	24V	Switch & By pass	3.3/12.5	35/2.4	4.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads





Box  Industry Carton



Box  Industry Carton



## FRESH WATER PUMP 41 SERIES(Long)




### FEATURES & BENEFITS

- Up to 4.5 GPM
- Can supply up to 4 fixtures
- Quick-Connect fittings
- Self priming
- Run dry safe
- On-demand use
- Industry Standard mounting pattern
- Rubber mounting-feet
- Can be used for Fresh & Salt Water
- Adjustable pressure switch
- 16 AWG, 4.5" long Leads

### PUMP

- Max Recommended Temperature 140°F (60°C) Max.
- Priming Capabilities 6 feet (1.8 m) suction lift
- Inlet/Outlet Ports Quick Attach
- Weight 5.0 lbs (2.30 kg)

### PERFORMANCE

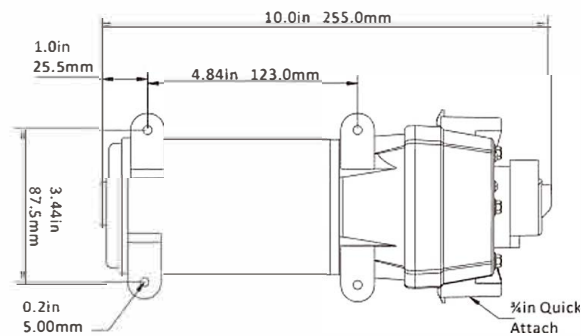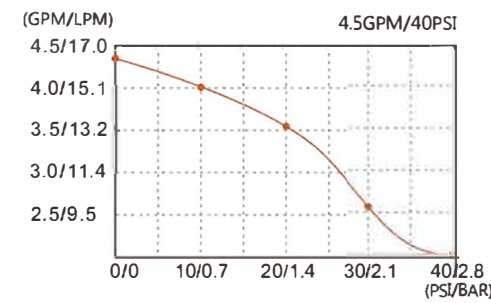

### Standard Accessories



More details and other optional accessories please refer to page 71-72.

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-045-040-41	12V	Switch & By pass	4.5/17.0	40/2.8	15.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-045-040-41	24V	Switch & By pass	4.5/17.0	40/2.8	6.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads

## FRESH WATER PUMP 42 SERIES(Short)



### FEATURES & BENEFITS

- Up to 3.0 GPM
- Self priming
- Run dry safe
- Quiet operation
- On-demand use
- Industry Standard mounting pattern
- Completely rubber mounting-base
- Internal bypass technology reduces cycling
- 16 AWG, 9.4" long with

### PUMP

- Max Recommended Temperature 140°F (60°C) Max.
- Priming Capabilities 6 feet (1.8 m) suction lift
- Inlet/Outlet Ports 1/2"-14 MNPT
- Weight 4.1 lbs (1.90 kg)

### PERFORMANCE

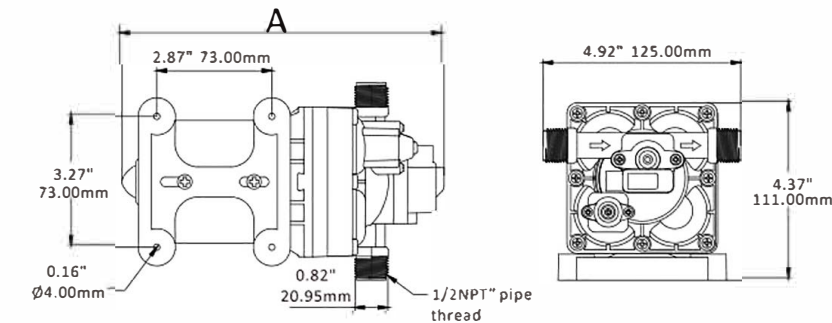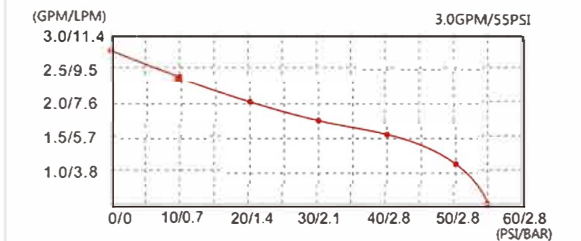

A	Model	Height
	SFDP1 / 2-020-055-42	194.5 mm (7.66")
	SFDP1 / 2-030-055-42	202.5 mm (7.97")

### Standard Accessories



More details and other optional accessories please refer to page 71-72.

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-030-055-42	12V	Switch & By pass	3.0/11.3	55/3.8	7.5	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP2-030-055-42	24V	Switch & By pass	3.0/11.3	55/3.8	4.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP1-020-055-42	12V	Switch & By pass	2.0/7.6	55/3.8	6.5	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP2-020-055-42	24V	Switch & By pass	2.0/7.6	55/3.8	3.5	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads





Box  Industry Carton



Box  Industry Carton



## FRESH WATER PUMP 42 SERIES(Long)



### FEATURES & BENEFITS

- Up to 3.0 GPM
- Self priming
- Run dry safe
- Quiet operation
- On-demand use
- Industry Standard mounting pattern
- Completely rubber mounting-base
- Internal bypass technology reduces cycling
- 14 AWG, 9.4" long Leads

### PUMP

- Max Recommended Temperature 140°F (60°C) Max.
- Priming Capabilities 6 feet (1.8 m) suction lift
- Inlet/Outlet Ports 1/2" MNPT
- Weight 6.6 lbs (3.0 kg)

### PERFORMANCE

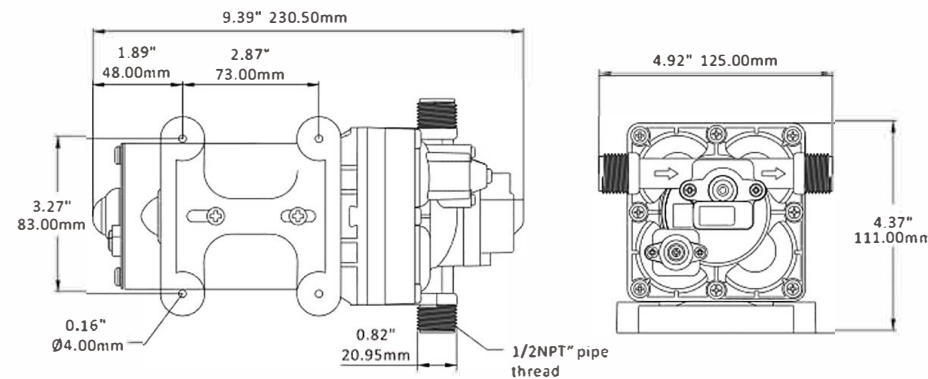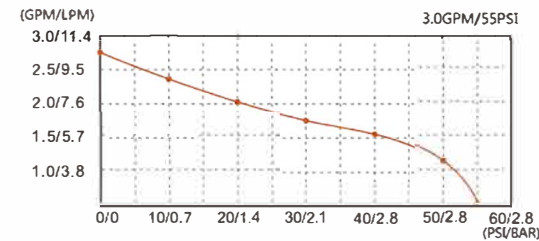

### Standard Accessories



More details and other optional accessories please refer to page 71-72.

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-040-055-42	12V DC	Switch & By pass	4.0/15.0	55/3.8	10.0	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDP2-040-055-42	24V DC	Switch & By pass	4.0/15.0	55/3.8	6.0	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDP1-050-055-42	12V DC	Switch & By pass	5.0/18.9	55/3.8	15.0	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDP2-050-055-42	24V DC	Switch & By pass	5.0/18.9	55/3.8	7.0	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads

## FRESH WATER PUMP 43 SERIES


### FEATURES & BENEFITS

- Up to 3.0 GPM
- Quick-Connect fittings
- Self priming
- Run dry safe
- Quiet operation
- On-demand use
- Industry Standard mounting pattern
- Completely rubber mounting-base Internal bypass technology reduces cycling
- 16 AWG, 4.5" long Leads

### PUMP

- Max Recommended Temperature 140°F (60°C) Max.
- Priming Capabilities 6 feet (1.8 m) suction lift
- Inlet/Outlet Ports Quick Attach
- Weight 4.1 lbs (1.90 kg)


### PERFORMANCE

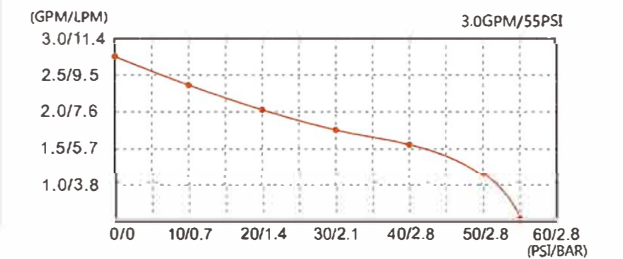

### Standard Accessories



More details and other optional accessories please refer to page 71-72.

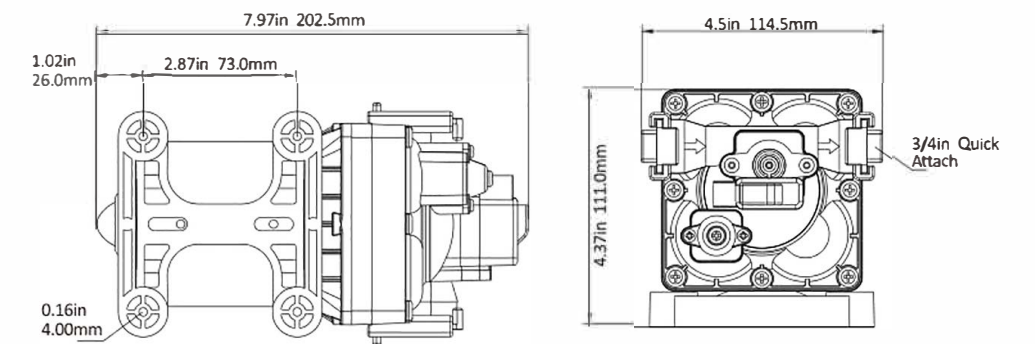

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-030-055-43	12V	Switch & By pass	3.0/11.3	55/3.8	7.5	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-030-055-43	24V	Switch & By pass	3.0/11.3	55/3.8	4.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads





Box  Industry Carton



Box  Industry Carton



## FRESH WATER PUMP 51 SERIES


### FEATURES & BENEFITS

- Up to 5.0 GPM
- Continuous Duty
- Can supply up to 4 fixtures
- Very quiet operation
- Self priming
- Run dry safe
- On-demand use
- Industry Standard mounting pattern
- Completely Rubber Mounting Base
- Can be used for Fresh & Salt Water
- Heavy-Duty Motor
- 14 AWG, 13" long Leads

### PUMP

- Max Recommended Temperature**  
140°F (60°C) Max.
- Priming Capabilities**  
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**  
1/2" MNPT
- Weight**  
5.9 lbs (2.68 kg)


### PERFORMANCE

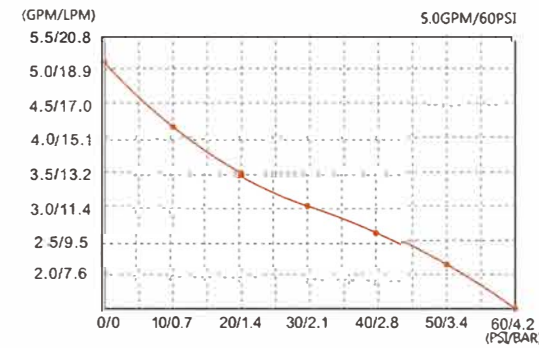

### Standard Accessories



More details and other optional accessories please refer to page 71-72.

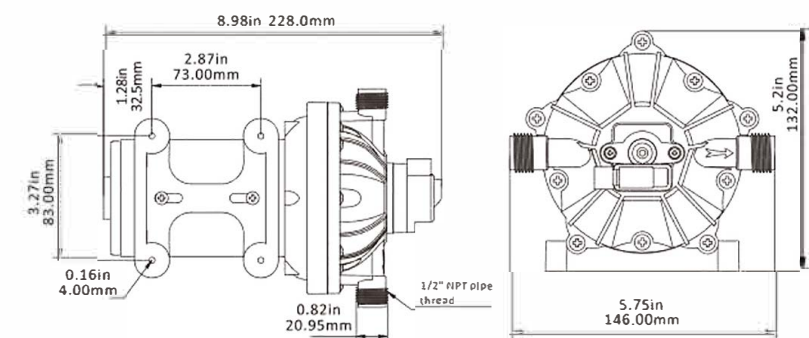

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-030-060-51	12V DC	Switch	3.0/11.5	60/4.2	10.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP2-030-060-51	24V DC	Switch	3.0/11.5	60/4.2	5.5	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP1-040-060-51	12V DC	Switch	4.0/15.0	60/4.2	13.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP2-040-060-51	24V DC	Switch	4.0/15.0	60/4.2	7.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP1-050-060-51	12V DC	Switch	5.0/18.9	60/4.2	17.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP2-050-060-51	24V DC	Switch	5.0/18.9	60/4.2	9.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP1-050-070-51	12V DC	Switch	5.0/18.9	70/4.8	18.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP2-050-070-51	24V DC	Switch	5.0/18.9	70/4.8	10.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads

## FRESH WATER PUMP 52 SERIES


### FEATURES & BENEFITS

- Up to 5.0 GPM
- Continuous Duty
- Can supply up to 4 fixtures
- Quick connect fittings
- Very quiet operation
- Self priming
- Run dry safe
- On-demand use
- Industry Standard mounting pattern
- Completely Rubber Mounting Base
- Can be used for Fresh & Salt Water
- Heavy-Duty Motor
- 16 AWG, 9" long Leads

### PUMP

- Max Recommended Temperature**  
140°F (60°C) Max.
- Priming Capabilities**  
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**  
Quick Attach
- Weight**  
5.95 lbs (2.7 kg)


### PERFORMANCE

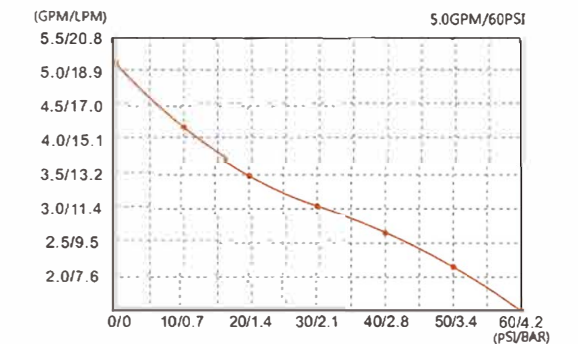

### Standard Accessories



More details and other optional accessories please refer to page 71-72.

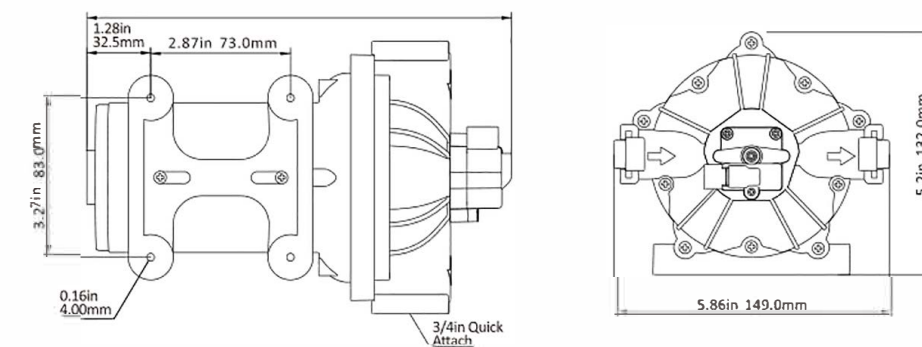

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-030-060-52	12V DC	Switch	3.0/11.5	60/4.2	10.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-030-060-52	24V DC	Switch	3.0/11.5	60/4.2	5.5	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP1-040-060-52	12V DC	Switch	4.0/15.0	60/4.2	13.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-040-060-52	24V DC	Switch	4.0/15.0	60/4.2	7.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP1-050-060-52	12V DC	Switch	5.0/18.9	60/4.2	17.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-050-060-52	24V DC	Switch	5.0/18.9	60/4.2	9.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP1-050-070-52	12V DC	Switch	5.0/18.9	70/4.8	18.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-050-070-52	24V DC	Switch	5.0/18.9	70/4.8	10.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads





Box  Industry Carton



Box  Industry Carton



## FRESH WATER PUMP 53 SERIES



### FEATURES & BENEFITS

- Up to 7.0 GPM
- Continuous Duty
- Can supply up to 6 fixtures
- Heavy-Duty Motor
- Quick connect fittings
- Self priming
- Run dry safe
- On-demand use
- Can be used for Fresh & Salt Water
- Adjustable pressure switch
- 16 AWG, 9' long Leads

### PUMP

- Max Recommended Temperature**  
140°F (60°C) Max.
- Priming Capabilities**  
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**  
Quick Attach
- Weight**  
9.5 lbs (4.31 kg)

### PERFORMANCE

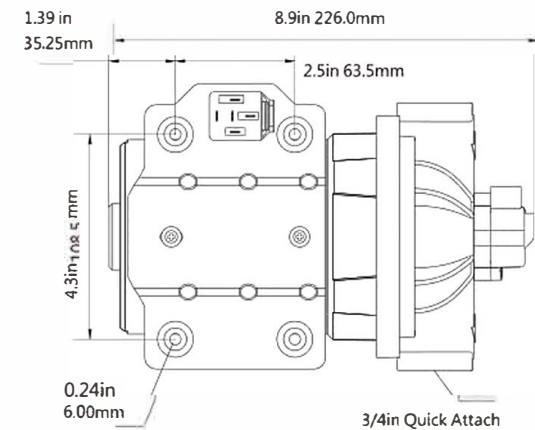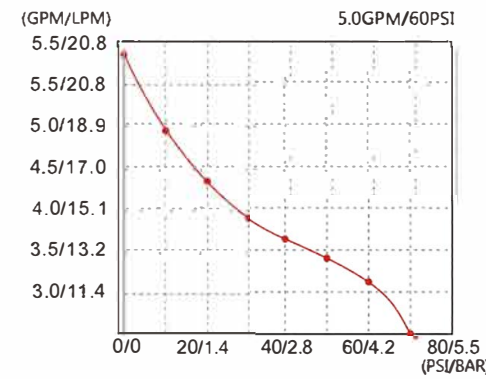

### Standard Accessories



More details and other optional accessories please refer to page 71-72.

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-070-060-53	12V DC	Switch	7.0/26.5	60/4.1	24.5	Viton	Santoprene	Quick Attach	Leads

## FRESH WATER PUMP 54 SERIES


### FEATURES & BENEFITS

- Positive displacement Pump
- Can Run Dry
- Demand & Bypass Pump
- Easy Connecting
- Industry Standard mount pattern
- 14 AWG, 9.4' long Leads

### PUMP

- Max Recommended Temperature**  
140°F (60°C) Max.
- Priming Capabilities**  
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**  
1/2" MNPT
- Weight**  
5.51 lbs (2.50 kg)


### PERFORMANCE

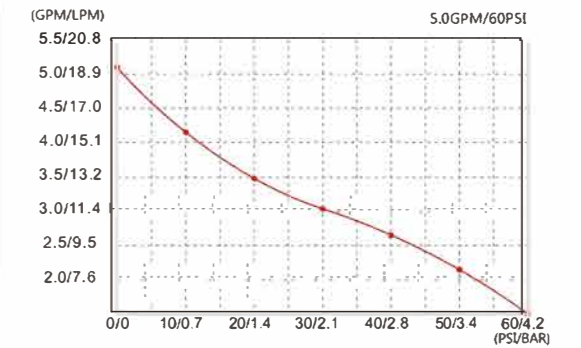

### Standard Accessories



More details and other optional accessories please refer to page 71-72.

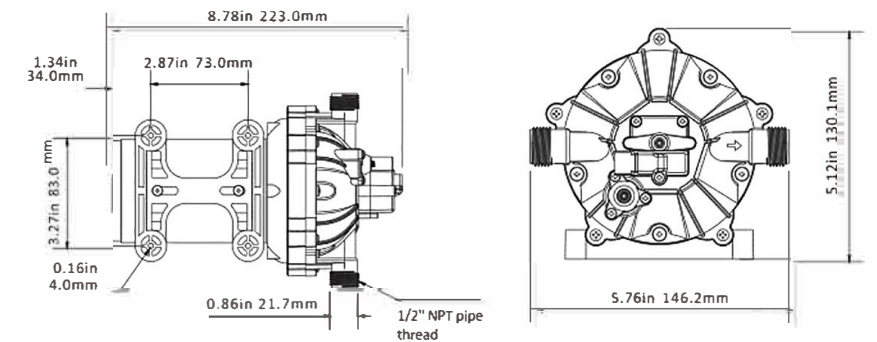

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-030-060-54	12V DC	Switch & By pass	3.0/11.5	60/4.2	12.0	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDP2-030-060-54	24V DC	Switch & By pass	3.0/11.5	60/4.2	6.0	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDP1-040-060-54	12V DC	Switch & By pass	4.0/15.0	60/4.2	15.0	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDP2-040-060-54	24V DC	Switch & By pass	4.0/15.0	60/4.2	7.0	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDP1-050-060-54	12V DC	Switch & By pass	5.0/18.9	60/4.2	17.0	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDP2-050-060-54	24V DC	Switch & By pass	5.0/18.9	60/4.2	9.0	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads





□ Box



□ Blister

□ Box



## WASHDOWN PUMP KIT

### FEATURES & BENEFITS

- 6M UV-protected Coiled Hose Coil
- 2M Inlet Hose
- Easy to use, store, and carry on
- Adjustable sprayer
- Built-in by pass valve
- Smooth flowing
- Quiet Operation
- 16 AWG, 4.5" Long Leads

### PUMP

- Liquid temperature 140°F ( 60°C ) Max.
- Priming Capabilities 6 feet(1.8m) suction lift
- Max Pressure 70 PSI (4.8 BAR)
- Weight 11 Lbs (5kg)



### Standard Accessories



41F008 41F007 51F08 51SG01

51H02

2.4 M Wiring Harness A

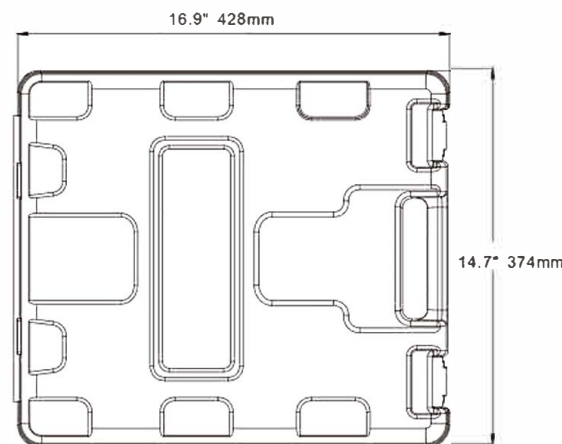

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	Open Flow (GPM/LPM)	Control Type	Max Draw	Shut-off Pressure (PSI/BAR)	Valves	Diaphragm	Ports	Wire Connections
SFWP1-045-070-01	12V	4.5 / 17.0	Demand & By pass	17.0A	70 / 4.8	EPDM	Santoprene	Quick attach	2-Pin/Leads

## WASHDOWN PUMP KIT

### FEATURES & BENEFITS

- Positive displacement pump
- Can run dry
- Quiet operation
- Demand pump
- Easy connect fittings
- Ignition protected
- Industry standard mount pattern

### PUMP

- Liquid temperature 140°F ( 60°C ) Max.
- Priming Capabilities 6 feet(1.8m) suction lift
- Inlet/Outlet Ports 1/2" -14MNPT
- Weight 6.74 lbs (3.06 kg) -33 series

### INCLUDES:

- 3.0/5.0 GPM Heavy-Duty Washdown Pump
- Trigger Spray Nozzle w/ Quick Connect
- 25' Coiled Hose (UV Protected, 1/2")
- Quick Hose Disconnect Fitting
- 50 Mesh Inlet Strainer
- 1/2" Barbed Fittings



51F01

51F03

51F02

51S01

51H01  
UV-protected 25'  
Coiled 1/2" O.D.Hose

51SG01

51F06  
Straight swivel  
adapter fitting,  
1/2" NPT(F) X 3/4"  
bar ( x2)

Other optional accessories please refer to page 71-72.

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	Switch	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFWP1-030-070-33	12V	Demand	3.0/11.6	70/4.8	12	EPDM	Santoprene	1/2" -14 MPNT	2-Pin/Leads
SFWP2-030-070-33	24V	Demand	3.0/11.6	70/4.8	6	EPDM	Santoprene	1/2" -14 MPNT	2-Pin/Leads





**WASHDOWN PUMP KIT**

**FEATURES & BENEFITS**

- Positive displacement pump
- Can run dry
- Quiet operation
- Demand pump
- Easy connect fittings
- Ignition protected
- Industry standard mount pattern

**PUMP**

- Liquid temperature 140°F ( 60°C ) Max.
- Priming Capabilities 6 feet(1.8m) suction lift
- Inlet/Outlet Ports 1/2" -14MNPT
- Weight 8.2 lbs (3.72 kg) -51 series

**INCLUDES:**

- (1) 3.0/5.0 GPM Heavy-Duty Washdown Pump
- (2) Trigger Spray Nozzle w/ Quick Connect
- (3) 25' Coiled Hose (UV Protected, 1/2")
- (4) Quick Hose Disconnect Fitting
- (5) 50 Mesh Inlet Strainer
- (6) 1/2" Barbed Fittings



Other optional accessories please refer to page 71-72.

**STANDARD PUMP CONFIGURATIONS**

Model	Voltage	Switch	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFWP1-050-070-51	12V	Demand	5.0/18.9	70/4.8	18	EPDM	Santoprene	1/2"-14 MPNT	2-Pin/Leads
SFWP2-050-070-51	24V	Demand	5.0/18.9	70/4.8	9	EPDM	Santoprene	1/2"-14 MPNT	2-Pin/Leads



**HOSECOIL WASHDOWN SYSTEM**

**FEATURES & BENEFITS**


1. Consists of UV-protected 20'(6 m) Coiled 1/3" I.D. Hose, spray nozzle with adjustable tip and contoured grip and bronze fittings.
2. Coil hose eliminates any kinks that may arise from normal water hose.
3. Designed to facilitate easy, neat, safe storage.
4. Great for large cockpits, dockside installation and even home cleaning use.

<b>Model</b>	SFHW2-060-01		
<b>Spray Gun</b>	Connector:5/8"QA	Pressure:0-8 Bar	
<b>Contoured Grip</b>	Connector:5/8"QA *5/8"QA	Diameter: ID 1/3"	Length:20'
<b>Adaptor</b>	Connector:3/4"FNPT / 1/2"FNPT / 1"FNPT * 5/8" QA		

**8L ACCUMULATOR TANK INSTRUCTIONS**

**FEATURES & BENEFITS**

- Making flow more smoother
- Prolong pump's service life
- protective coating for corrosion resistance
- 3/4" MNPT thread for convenient installation in the water system

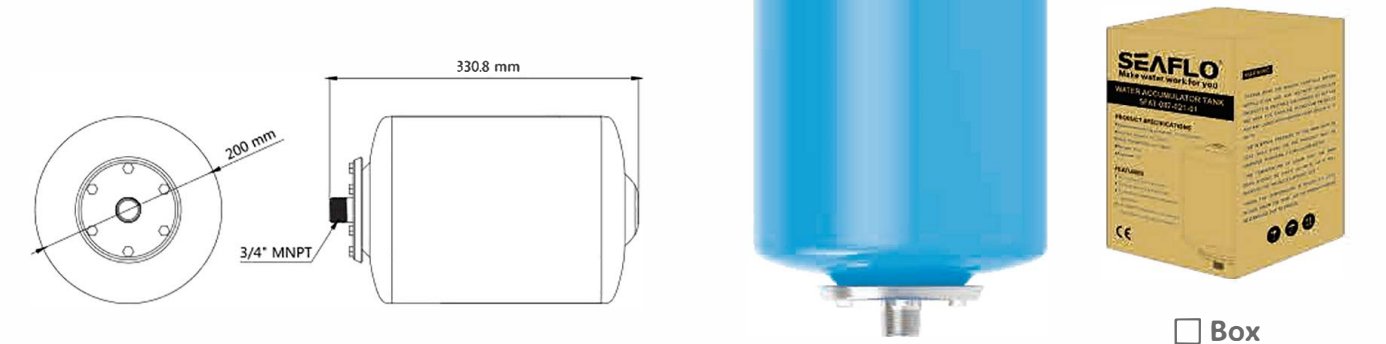

**STANDARD PUMP CONFIGURATIONS**

Model	Tank Volume	Max. Pressure	Inlet/outlets size	Net Weight
SFAT-087-021-01	8L	87 PSI ( 6 Bar )	3/4" MNPT	2 KG





Blister




Box

## PRESSURIZED ACCUMULATOR TANK 0.75 L / 1 L


Accumulator tanks hold a reservoir of air and water down stream from the pump. The air acts as a cushion, absorbing pump and pressure fluctuations, smoothing the flow and making the system quieter. Accumulators allow the pump to reach shut-off pressure more smoothly which reduces the on/off cycle which gives better control of hot water delivery.

### FEATURES & BENEFITS


- Smoother flow, quieter water systems.
- Internal rubber membrane eliminates maintenance and allows universal mounting.
- Better control of hot water temperatures.
- Simply fitted to new or existing systems.
- Longer pump life, lower battery drain.
- Snap-in port fittings.

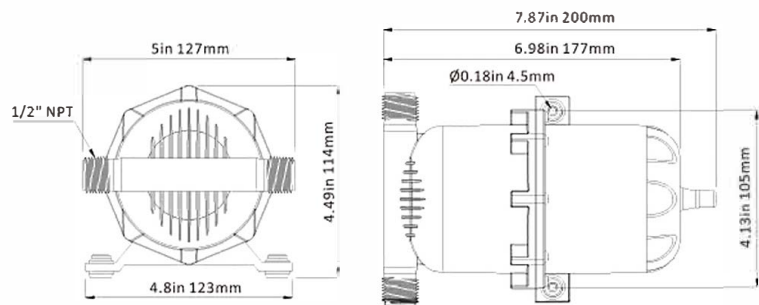

0.75 L

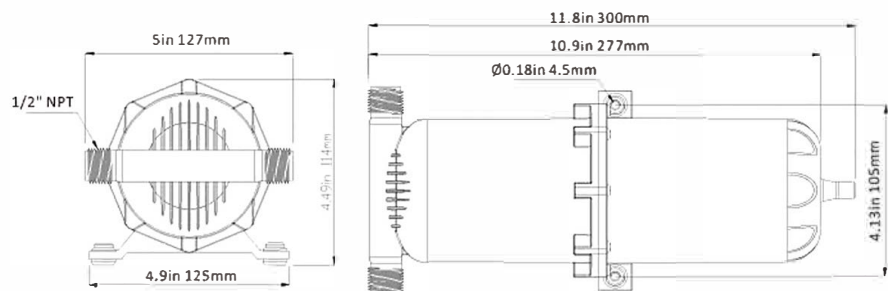

1 L

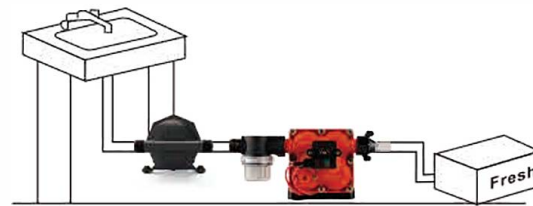

#### Standard Accessories:



51F01

#### Optional Accessories:



51F02 51F03 51F04 51F05

More details and other optional accessories please refer to page 71-72.

### PRODUCT SPECIFICATIONS

Model	Internal Volume	Pre-charge Pressure	Max Operating Pressure	Air Fill Valve	Inlet/Outlet Dia	Weight	Dimensions
SFAT-075-125-01	0.75 L 23.5 OZ	10 PSI 0.7 BAR	125 PSI 8.6 BAR	standard automotive style tire valve	1/2" MNPT	360g	8.1"x4.6" 205mm x 116mm

## PUMP ACCUMULATOR PRESSURE BOOST SYSTEM




### FEATURES & BENEFITS

- Smoother flow, quieter water systems.
- Longer pump life, lower battery drain.
- Self-priming up to 6 feet (1.8 m).
- Five Chamber diaphragms for smooth and quiet operation.
- Can be installed vertically or horizontally.
- Maintenance free potable water quality accumulator tank.
- Complies with USCG 183.410 and ISO 8846 MARINE (Ignition Protection).
- 16 AWG, 4.5" Long Leads

### PUMP

- Max Recommended Temperature**  
140°F (60°C) Max.
- Priming Capabilities**  
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**  
1/2" - 14 MNPT
- Weight**  
11.9 lbs (5.4 kg)

### PERFORMANCE

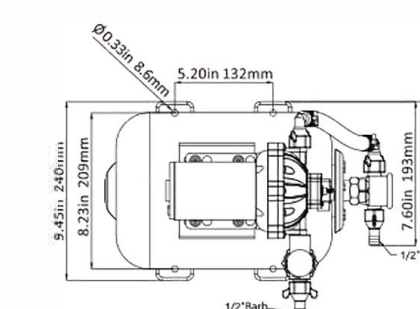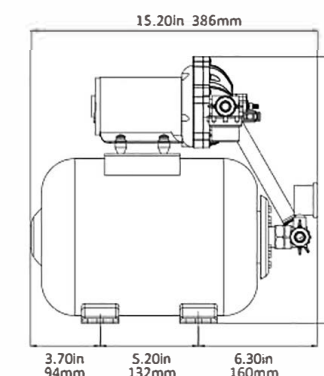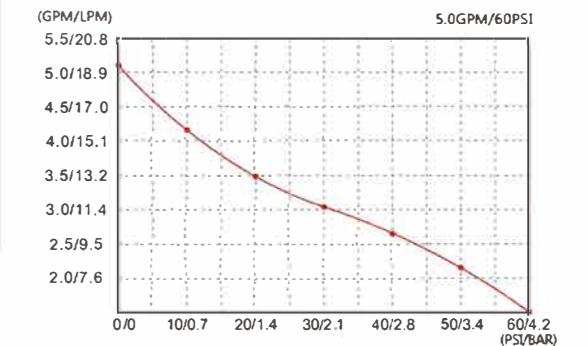

#### Standard Accessories:



More details and other optional accessories please refer to page 71-72.

### STANDARD PUMP CONFIGURATIONS

Model	Tank Volume	Voltage	Control Type	GPM/LPM	Pressure On (PSI / BAR)	Pressure Off (PSI / BAR)	Max Draw(A)	Ports	Wire Connections
SFWSK1-030-060-021	8L	12V	Switch	3.0/11.5	40/2.8	60/4.2	10.0	1/2" barb	2-Pin/Leads
SFWSK2-030-060-021	8L	24V	Switch	3.0/11.5	40/2.8	60/4.2	5.5	1/2" barb	2-Pin/Leads
SFWSK1-040-060-021	8L	12V	Switch	4.0/15.0	40/2.8	60/4.2	13.0	1/2" barb	2-Pin/Leads
SFWSK2-040-060-021	8L	24V	Switch	4.0/15.0	40/2.8	60/4.2	7.0	1/2" barb	2-Pin/Leads
SFWSK1-050-060-021	8L	12V	Switch	5.0/18.9	40/2.8	60/4.2	17.0	1/2" barb	2-Pin/Leads
SFWSK2-050-060-021	8L	24V	Switch	5.0/18.9	40/2.8	60/4.2	9.0	1/2" barb	2-Pin/Leads






### AIR CONDITIONING PUMP 250 GPH

#### FEATURES & BENEFITS

- 5 GPM seawater circulation pump
- Run dry safe for normal workloads
- Continuous duty
- Replaces any brand marine air conditioning pump

#### PUMP

- Liquid
- 130°F ( 54°C ) Max.
- Inlet/Outlet Ports**
- Inlet: 3/8" NPT & 3/4" NPT
- Outlet: 1/4" NPT

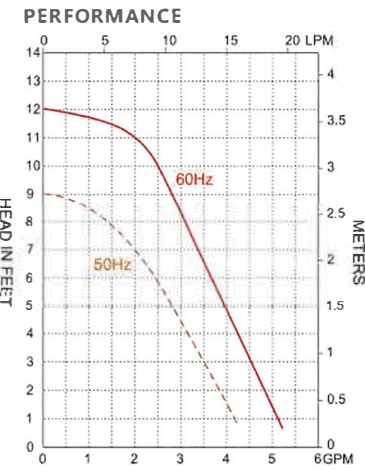






### AIR CONDITIONING PUMP 500 GPH

#### FEATURES & BENEFITS

- 5 GPM seawater circulation pump
- Run dry safe for normal workloads
- Continuous duty
- Replaces any brand marine air conditioning pump

#### PUMP

- Liquid
- 130°F ( 54°C ) Max.
- Inlet/Outlet Ports**
- Inlet: 3/4" FPT
- Outlet: 1/2" MPT

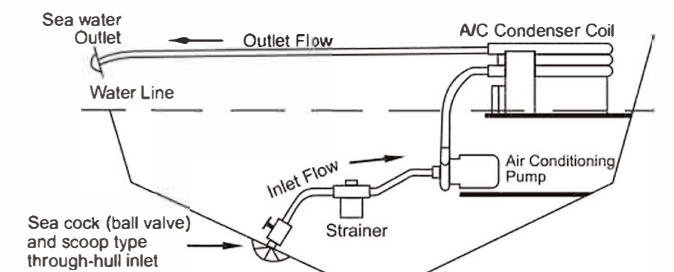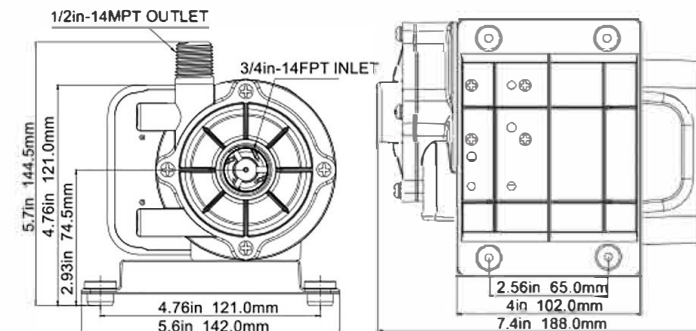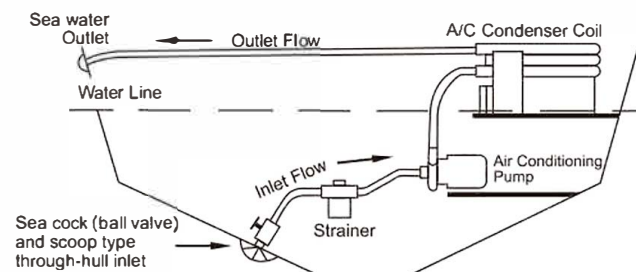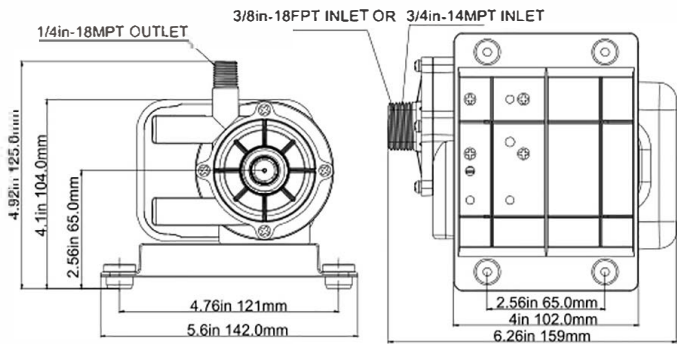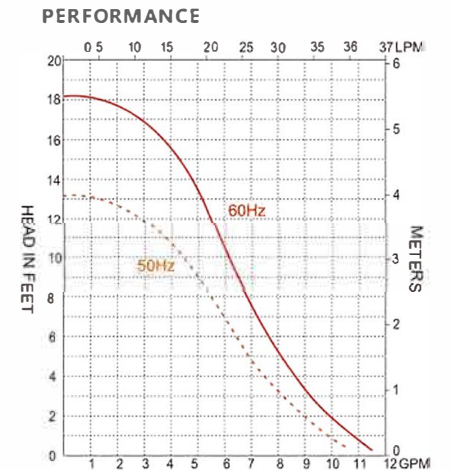

#### STANDARD PUMP CONFIGURATIONS

Model	SFCPA1-G250-01		SFCPA2-G250-01	
	115 V		230 V	
Frequency	60 Hz	50 Hz	60 Hz	50 Hz
Flow Rate	5 GPM	18.5 LPM	5 GPM	18.5 LPM
Head	13 ft / 5.7 psi	2.7 m	13 ft / 5.7 psi	2.7 m
Power	56 W	58 W	55 W	55 W
Amps Draw	0.99A	1.1 A	0.50A	0.56 A

#### STANDARD PUMP CONFIGURATIONS

Model	SFCPA1-G500-01		SFCPA2-G500-01	
	115 V		230 V	
Frequency	60 Hz	50 Hz	60 Hz	50 Hz
Flow Rate	8.5 GPM	31 LPM	8.5 GPM	31 LPM
Head	19 ft / 8.2 psi	4.3m	19 ft / 8.2 psi	4.3 m
Power	115 W	110 W	110 W	105 W
Amps Draw	1.8A	1.9A	0.9A	0.9 A





Box



Box



## MACERATOR PUMP 01 SERIES

### Features & Benefits



- Completely new design
- Sealed motor
- Easy reach knob in case of clogs
- Run Dry for short periods of time
- New 4-blade design
- Thermally Protected
- Ignition Protected

### PUMP

- Liquid Temperature**  
140°F (60°C) Max.
- Power**  
12 amps max current draw
- Weight**  
4.9 lbs (2.24 kg)

### Inlet/Outlet Ports

- Inlet:**  
1.5" (39 mm) Hose Barb  
1.5" (39 mm) Threaded Fitting
- Outlet:**  
1" Hose Barb

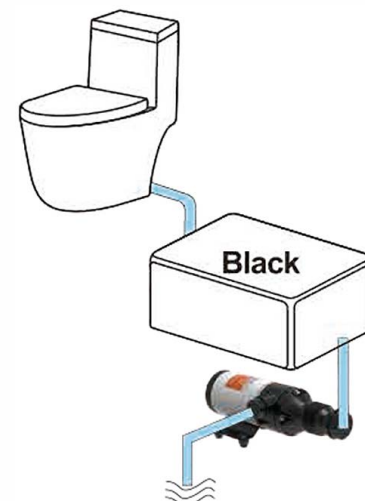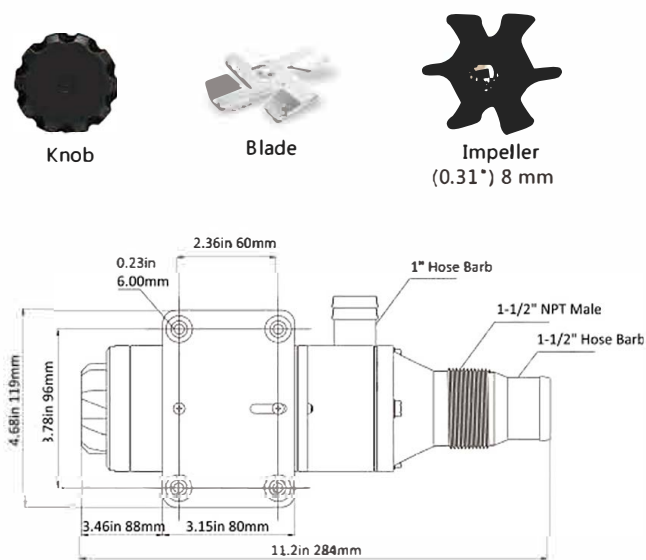

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	GPM/LPM	Impeller	Ports	Lead	Molded	Max Draw(A)
SFMP1-120-01	12V	12/45.0	Rubber & Aluminum	Inlet 1-1/2" Barb/1-1/2" NPT Outlet 1" Barb	Yes	N/A	12.0
SFMP2-120-01	24V	12/45.0	Rubber & Aluminum	Inlet 1-1/2" Barb/1-1/2" NPT Outlet 1" Barb	Yes	N/A	6.0

## MACERATOR PUMP 02 SERIES

### Features & Benefits


- Fresh water rinse capabilities
- Connects directly to the RV waste outlet
- Impeller can be loosened with a end back knob
- Ability to dump longer distances
- Easy clean up and storage
- New four blades for reducing clogging
- With manual blending function for emergency

### PUMP

- Liquid Temperature**  
140°F (60°C) Max.
- Power**  
12 amps max current draw
- Weight**  
5.1 Lbs ( 2.3Kg )

### Inlet/Outlet Ports

- Inlet:**  
3" (75 mm) RV Connector
- Outlet:**  
1" Hose Barb

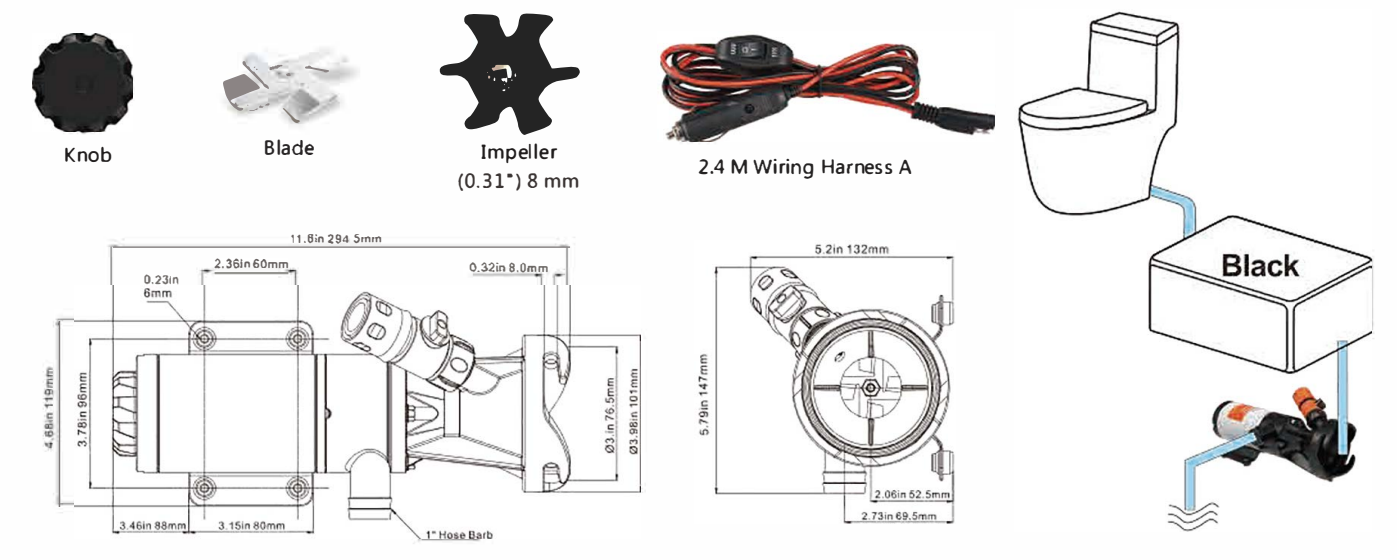

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	GPM/LPM	Impeller	Ports	Max Draw(A)
SFMP1-120-02	12V	12/45.0	Rubber & Coppe	3" (75 mm) RV Connector 1" Hose Barb	12.0
SFMP2-120-02	24V	12/45.0	Rubber & Coppe	3" (75 mm) RV Connector 1" Hose Barb	7.0





## GEAR PUMPS

### Features & Benefits

Perfect for pumping oil  
Metal pump head  
Metal gears  
Sealed Motor Design  
Thermally Protected Motor  
Self-priming  
Stainless Steel Shaft

### Typical Applications

Extreme duty  
Transmission fluid transfer  
Lubricant and viscous liquid transfer  
Industrial use  
Oil change pump

### PUMP

**Liquid Temperature**  
140°F (60°C) Max.  
**Priming Capabilities**  
Not needed flooded suction  
**Power**  
10 amps max current draw  
**Max Pressure**  
Not needed  
**Inlet/Outlet Ports**  
3/8" FNPT (9.52 mm)  
thread fitting  
**Weight**  
5.46 lbs (248 kg)

### MOTOR

**Type**  
High quality seamless design  
that is thermally protected  
**Leads**  
Wire leads  
**Temperature Limits**  
140°F (60°C) Max.  
**Duty Cycle**  
Intermittent  
**Voltage**  
12v/24v






Gear

### Standard Accessories



GPF001 GPF001

3/8" MNPT x 1/2" Barb

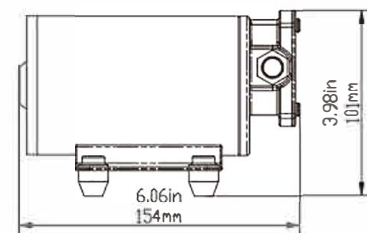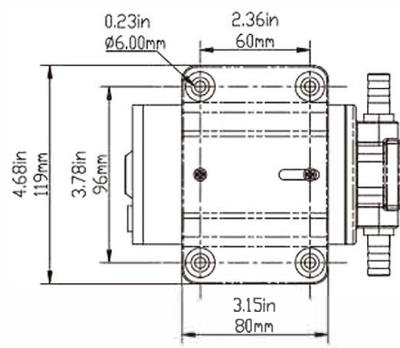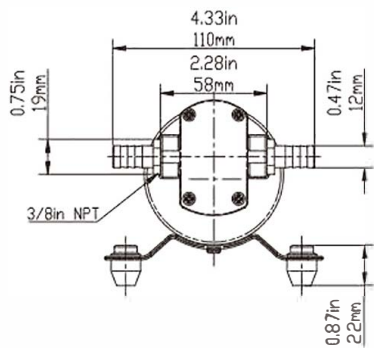

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	GPM/LPM	Impeller	Ports	Lead	Molded	Max Draw(A)
SFGP1-032-003-01	12V	3.2/12.0	copper	3/8" FNPT	Yes	N/A	10
SFGP2-032-003-01	24V	3.2/12.0	copper	3/8" FNPT	Yes	N/A	6

## SELF-PRIMING BILGE PUMPS

### Features & Benefits

Sealed motor design  
Thermally Protected Motor  
High Quality Efficient Motor  
Self-priming  
Stainless Steel Shaft  
Great for bilge water that  
traditional pumps cannot get to

### Typical Applications

Bilge pump  
Industrial use  
Water transfer

### PUMP

**Liquid Temperature**  
140°F (60°C) Max.  
**Priming Capabilities**  
4 feet (1.2 m) suction lift  
**Power**  
10 amps max current draw  
**Max Pressure**  
3 m (9.8 ft)  
**Inlet/Outlet Ports**  
1/2" FNPT (19 mm)  
**Weight**  
5.46 lbs (248 kg)




### MOTOR

**Type**  
High quality seamless design  
that is thermally protected  
**Leads**  
Wire leads  
**Duty Cycle**  
Intermittent  
**Voltage**  
12v/24v

### Standard Accessories



Impeller  
(0.31" 8 mm)

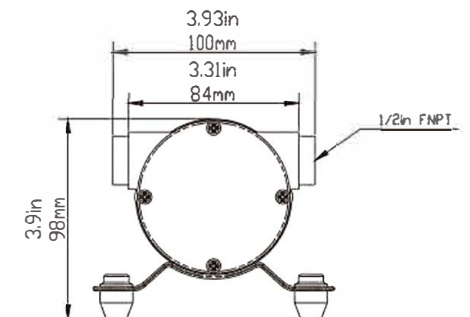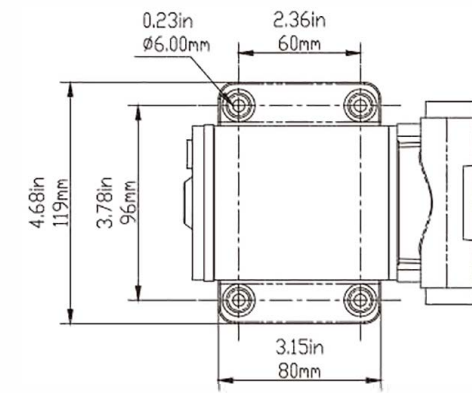

### STANDARD PUMP CONFIGURATIONS

Model	Voltage	GPM/LPM	Impeller	Ports	Lead	Molded	Max Draw(A)
SFSP1-080-003-01	12V	8.0/30.0	Rubber & copper	1/2" FNPT	Yes	N/A	10.0
SFSP2-080-003-01	24V	8.0/30.0	Rubber & copper	1/2" FNPT	Yes	N/A	7.0





1450 CFM

235 CFM



Box



Box





270 CFM

130 CFM


## IN-LINE BLOWERS 03/04 SERIES

### FEATURES & BENEFITS

- Meets or exceeds ISO 8846 certification
- Built-in mounting feet allows easy vertical or horizontal installation
- Very low current draw, high volume air flow, long life
- Four/Six-blade fan maximizes airflow and efficiency
- Sealed motor shaft for moisture protection
- Corrosion resistant ABS plastic housing

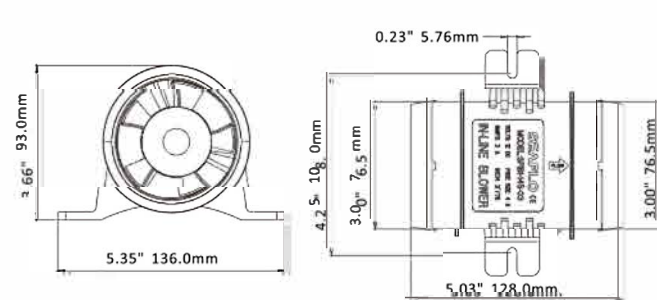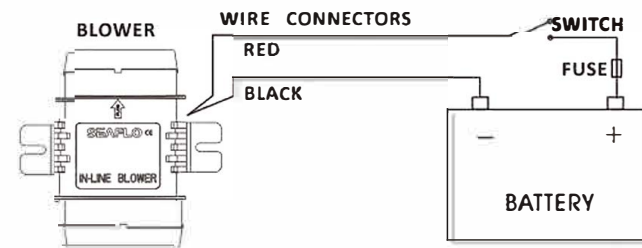

145 CFM

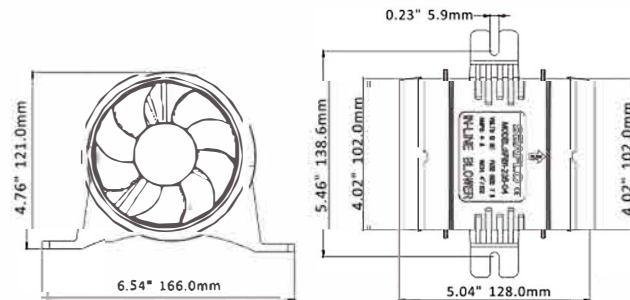

235 CFM



### Technical Date

Model	Volts(V)	Air Flow (cfm/cmh)	Amp Draw(A)	Fuse (A)	Intake Pipe Dia	Packing Size(mm)
SFIB1-145-03	12V	145/247	3.0A	5.0A	3" / 76 mm	140*133*95
SFIB2-145-03	24V	145/247	1.5A	2.5A	3" / 76 mm	140*133*95
SFIB1-235-04	12V	235/400	4.0A	7.0A	4" / 102 mm	170*133*123
SFIB2-235-04	24V	235/400	2.0A	4.0A	4" / 102 mm	170*133*123


## IN-LINE BLOWERS 01/02 SERIES

### FEATURES & BENEFITS

- Meets or exceeds ISO 8846 certification
- Built-in mounting feet allows easy vertical or horizontal installation
- Very low current draw, high volume air flow, long life
- Four/Six-blade fan maximizes airflow and efficiency
- Sealed motor shaft for moisture protection
- Corrosion resistant ABS plastic housing

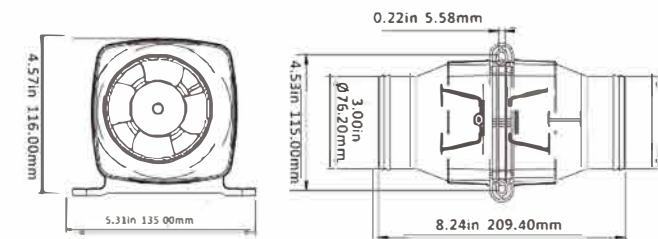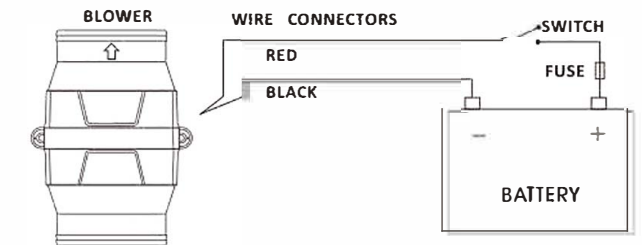

130 CFM

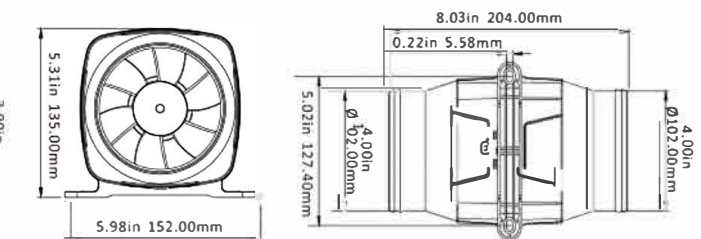

270 CFM

### Technical Date

Model	Volts(V)	Air Flow (cfm/cmh)	Amp Draw(A)	Fuse (A)	Intake Pipe Dia	Packing Size(mm)	N.W./G.W. (kg)
SFIB1-130-01	12V	130/220	2.5A	5.0A	3" / 76 mm	215*137*120	0.45/0.60 kg
SFIB2-130-01	24V	130/220	1.3A	3.0A	3" / 76 mm	215*137*120	0.45/0.60 kg
SFIB1-270-02	12V	270/456	6.0A	10.0A	4" / 102 mm	207*154*114	0.70/0.90 kg
SFIB2-270-02	24V	270/456	3.0A	5.0A	4" / 102 mm	207*154*114	0.70/0.90 kg






Box



Box

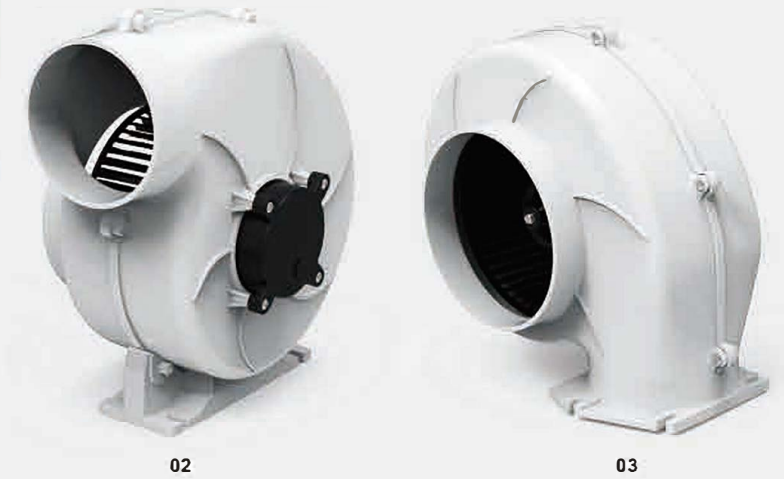

02

03

## BILGE BLOWERS



### FEATURES & BENEFITS

- Dual Mounting Options
- Efficient high volume air flow
- Very low current draw, long life
- Flex Mount or Flange Mount
- Sealed motor shaft for moisture protection
- Corrosion resistant ABS plastic housing
- Ignition protected
- CE conforms with EN 50014-1, EN N 61000-3-3




### TYPICAL APPLICATIONS

- Boats bilge ventilation
- Engine compartments
- Galleys and heads

#### Flange Mount

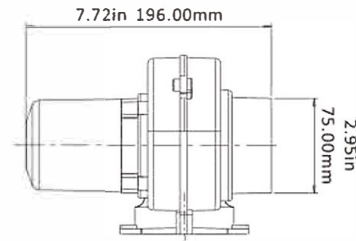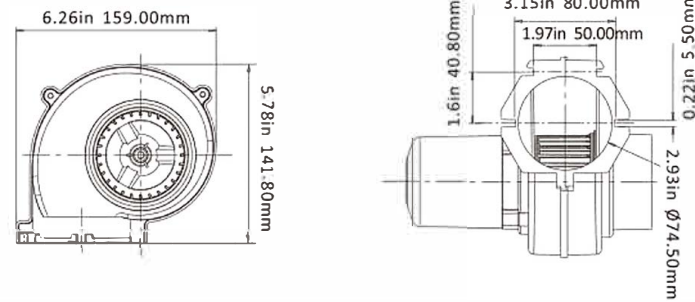

#### Flex Mount

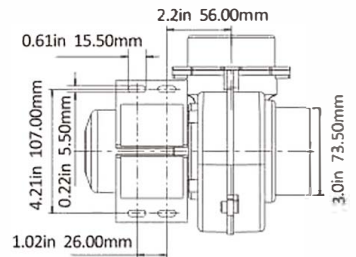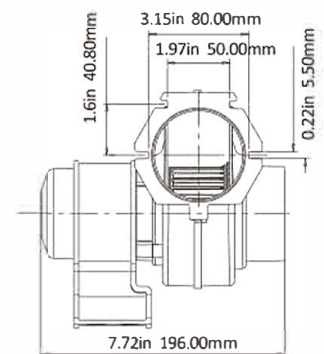

#### Technical Date

Model	Volts(V)	Air Flow (cfm/cmh)	Amp Draw(A)	Fuse (A)	Packing Size(mm)	N.W./G.W. (kg)
SFBB1-130-01	12V	130/220	2.5	5	160*160*200	0.71/0.83
SFBB2-130-01	24V	130/220	1.5	3	160*160*200	0.71/0.83


## BILGE BLOWERS

### FEATURES & BENEFITS

- Efficient high volume air flow
- Very low current draw, long life
- Available in either Flex Mount or Flange Mount
- Sealed motor shaft for moisture protection
- Corrosion resistant ABS plastic housing
- Ignition protected
- CE conforms with EN 50014-1, EN N 61000-3-3


### TYPICAL APPLICATIONS

- Boats bilge ventilation
- Engine compartments
- Galleys and heads
- Bus ventilation (engine and bathroom fumes)

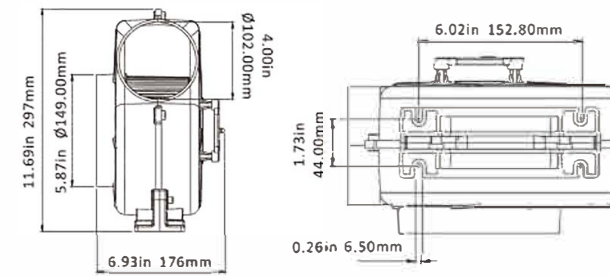

#### Flex Mount-02

The flex mount is when the motor mounting bracket is used to secure to blower, hose would have to be connected to both the inlet and outlet.

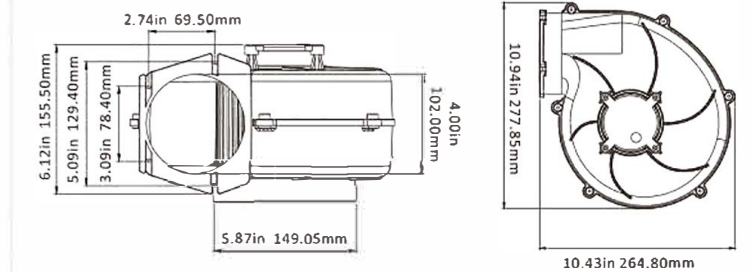

#### Flange Mount-03

The flange mount is when the blower is mounted using the outlet mounting flange to secure the pump.

#### Technical Date

Model	Volts(V)	Air Flow (cfm/cmh)	Amp Draw(A)	Fuse (A)	Packing Size(mm)	N.W./G.W. (kg)
SFBB1-320-02	12V	320/550	11.0A	16.0A	300*270*280	2.27/2.45
SFBB2-320-02	24V	320/550	6.0A	10.0A	300*270*280	2.27/2.45
SFBB1-320-03	12V	320/550	11.0A	16.0A	300*270*280	2.46/2.56
SFBB2-320-03	24V	320/550	6.0A	10.0A	300*270*280	2.46/2.56





SF-SWF001



SF-SWF002




Box



## SEA WATER FILTER

Seawater filter is a filter directly filter water suspended solids, particles and other impurities with a filter net, to reduce dirt, bacteria algae, rust, etc. in a pipe system, in this way to protect the pipe system and equipment and make them work properly.

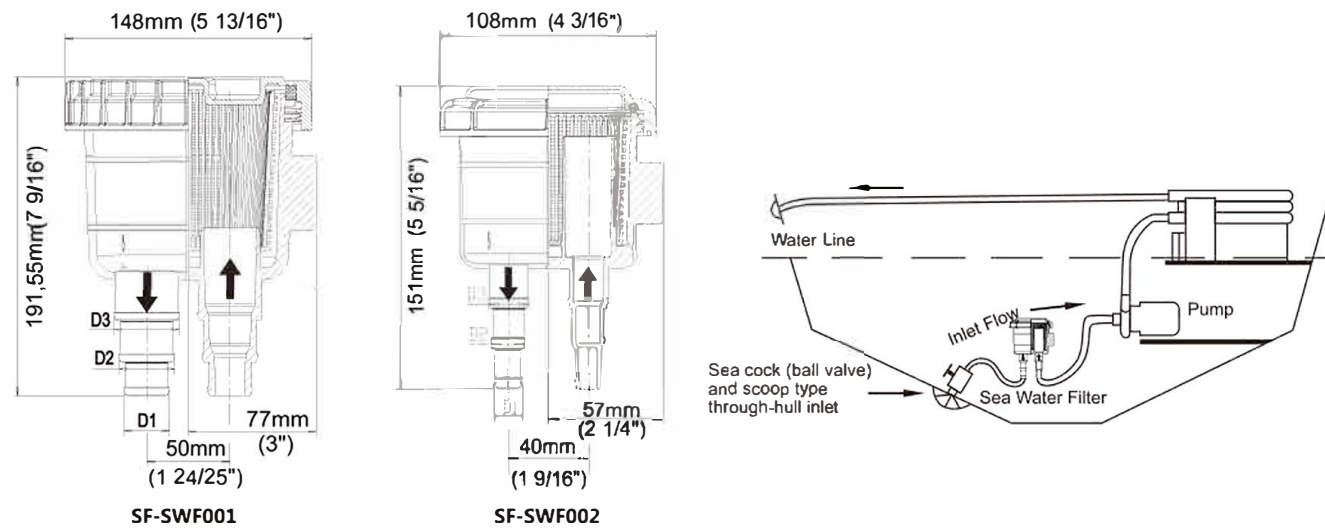

### Technical Data

Model	Output Size	Recommended Hose Size	Recommended Input
SF-SWF001	D1: 25.4(1")	25"	91L/min. 24GMP US
	D2: 31.8(1-1/4")	32"	143L/min. 37.8GMP US
	D2: 38.1(1-1/2")	38"	200L/min.52.9GMP US
SF-SWF002	D1: 12.7(1/2")	13"	23L/min. 6GMP US
	D2: 15.9(5/8")	16"	35L/min. 9GMP US
	D2: 19.1(3/4")	19"	51L/min. 13GMP US

## Plastic 5,10,20 Litres Auto Shut Off Fuel Cans

Fuel Container Gasoline, Diesel, Two-stroke engine oil EAP & AS/NZS 2906:2001 Standards

### Description

Seaflo 5, 10 & 20 Litre automatic shut off fuel cans which are designed with specially proportioned rear handle for balanced pouring that is self venting for safer & easier pouring. Features reduced emissions to protect the environment and meets EAP & AS/NZS 2906:2001 Standards

### Typical Applications

Car, lawnmower, atv or snowblower and other essential equipment topped off with fuel

### Features


Complies to EPA & CARB Standards  
Spill Proof, Durable Vented Pouring Spout  
UV Stabilized High Grade Polyethylene  
Certified to Australian Standard AS/NZS 2906:2001



Model	Capacity	Length	Width	Height	Weight (DRY)	Fuel	Color	Handle Type
SFGT-05-01	5L	260MM	130MM	275MM	0.8KG	Gasoline	Red	Built-in
SFGT-10-01	10L	290MM	160MM	346MM	1.3KG	Gasoline	Red	Built-in
SFGT-20-01	20L	330MM	190MM	476MM	1.8KG	Gasoline	Red	Built-in
SFDT-05-01	5L	260MM	130MM	275MM	0.8KG	Diesel	Yellow	Built-in
SFDT-10-01	10L	290MM	160MM	346MM	1.3KG	Diesel	Yellow	Built-in
SFDT-20-01	20L	330MM	190MM	476MM	1.8KG	Diesel	Yellow	Built-in
SF2T-05-01	5L	260MM	130MM	275MM	0.8KG	Two-stroke Gasoline Engine Oil	Green	Built-in
SF2T-10-01	10L	290MM	160MM	346MM	1.3KG	Two-stroke Gasoline Engine Oil	Green	Built-in
SF2T-20-01	20L	330MM	190MM	476MM	1.8KG	Two-stroke Gasoline Engine Oil	Green	Built-in

Consult factory for other available models



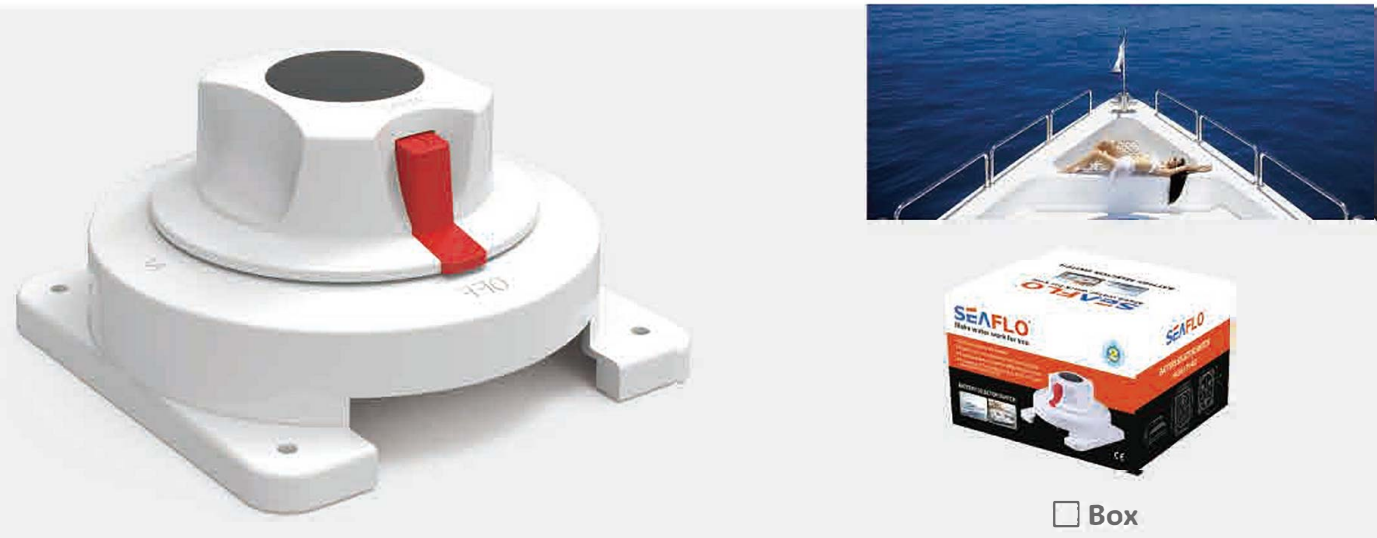

☐ Box


## BATTERY SELECTOR SWITCH

### Features & Benefits

The selector switch will allow the use of one battery for engine starting and one battery for auxiliary electrical equipment. Batteries may be placed in parallel by switching to (BOTH) for emergency usage. Small in size, Fine appearance, Sturdy and durable. 3/8"-16 tin-plated copper studs for maximum conductivity and corrosion resistance. Can be installed in any position. 175A continuous duty at DC-12V. 300A intermittent duty at DC-12V. Suitable for 6V, 12V, 24V and 32V ship's supply system.

### 4 Positions

- OFF** - Complete disconnect of both batteries or banks of batteries
- 1** - Operation of No.1 battery only
- 2** - Operation of No.2 battery only
- BOTH** - Operation of both batteries and banks of batteries

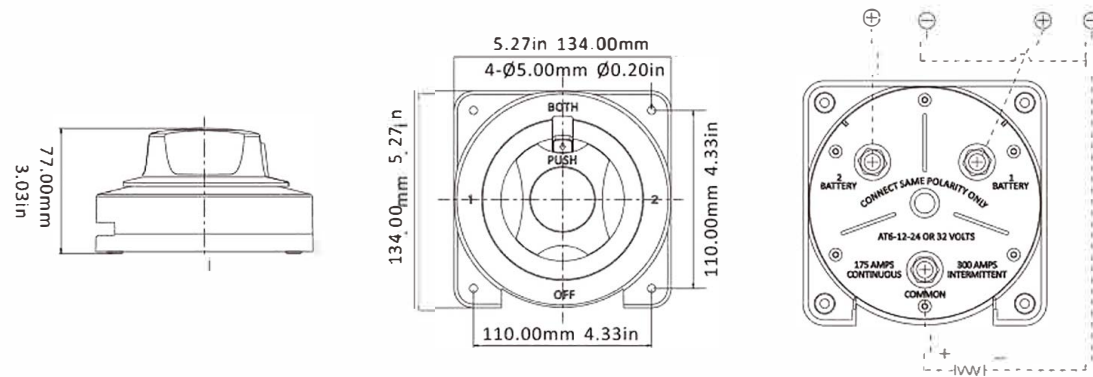

### Technical Data

Model	SFCBS-175-402
Max. Volt (V)	6-12-24-32
Amp Draw (A)	175
Max Amp Draw (A)	300
Switch Position	3
Packing Size	140x140x85 mm
N.W./G.W.	0.45*0.65 kg

## Battery Isolator Switch

### Features & Benefits

An interchangeable labeling system allowing a full range of applications. Removable side plates on 4 sides for access of up to 1/0 cables plus a rear cover insulating the rear terminals against any short circuits. (SFCBS-275-201) ABS Anti-aging, Anti-ultraviolet. May be connected to either the positive or the negative electric cable. In the "OFF" position the key may be removed. (SFIBS1-01 only)



☐ Blister




☐ Box



SFBIS2-01




SFBIS1-01

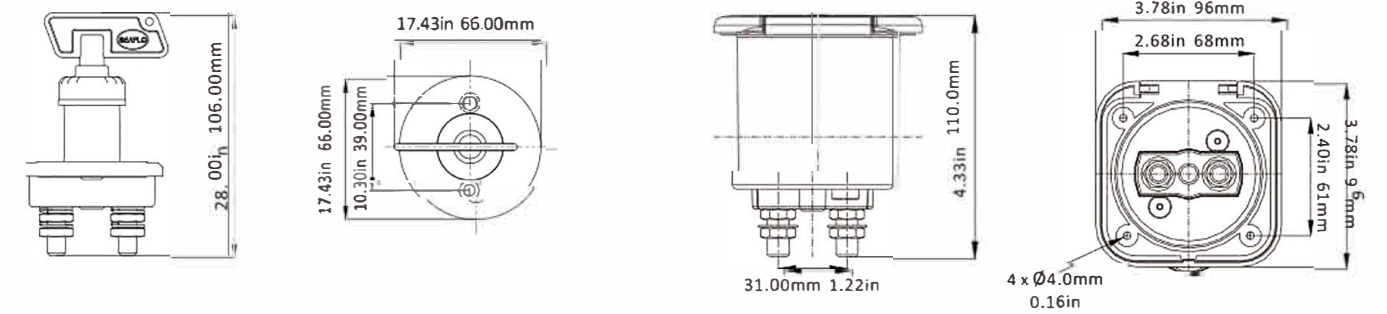

### PRODUCT SPECIFICATIONS

Model	Voltage	Amps Draw	Max Amp Draw	N.W./G.W.	Working Tempure°C	Package
SFBIS1-01	50V	275A	1250A	0.29/0.32kg	40-80°C	Carton
SFBIS2-01	50V	275A	1250A	0.15kg	40-80°C	PE Plastic Bag

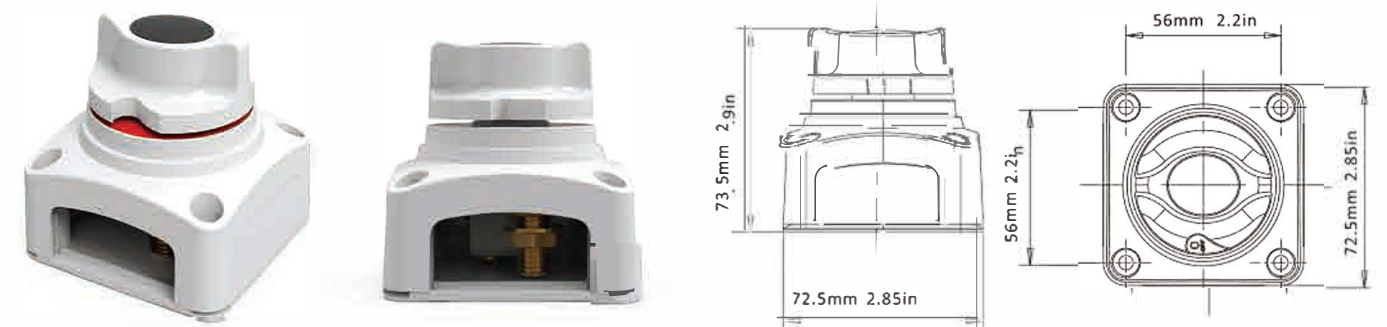


Model	Max.Volt	Amp Draw	Max Amp Draw	Switch Position	Packing Size	N.W./G.W.
SFCBS-275-201	50V	275A	1250A	2	78x78x80 mm	0.20/0.30 kg




## WATER INLET HATCH

SEAFLO Water Inlet Hatch is made of UV stabilized ABS with robust reinforcement. They have a 1/2 inch air vent for a fast fill and lockable hatch with 2 keys. Also installation screw and putty type are included.

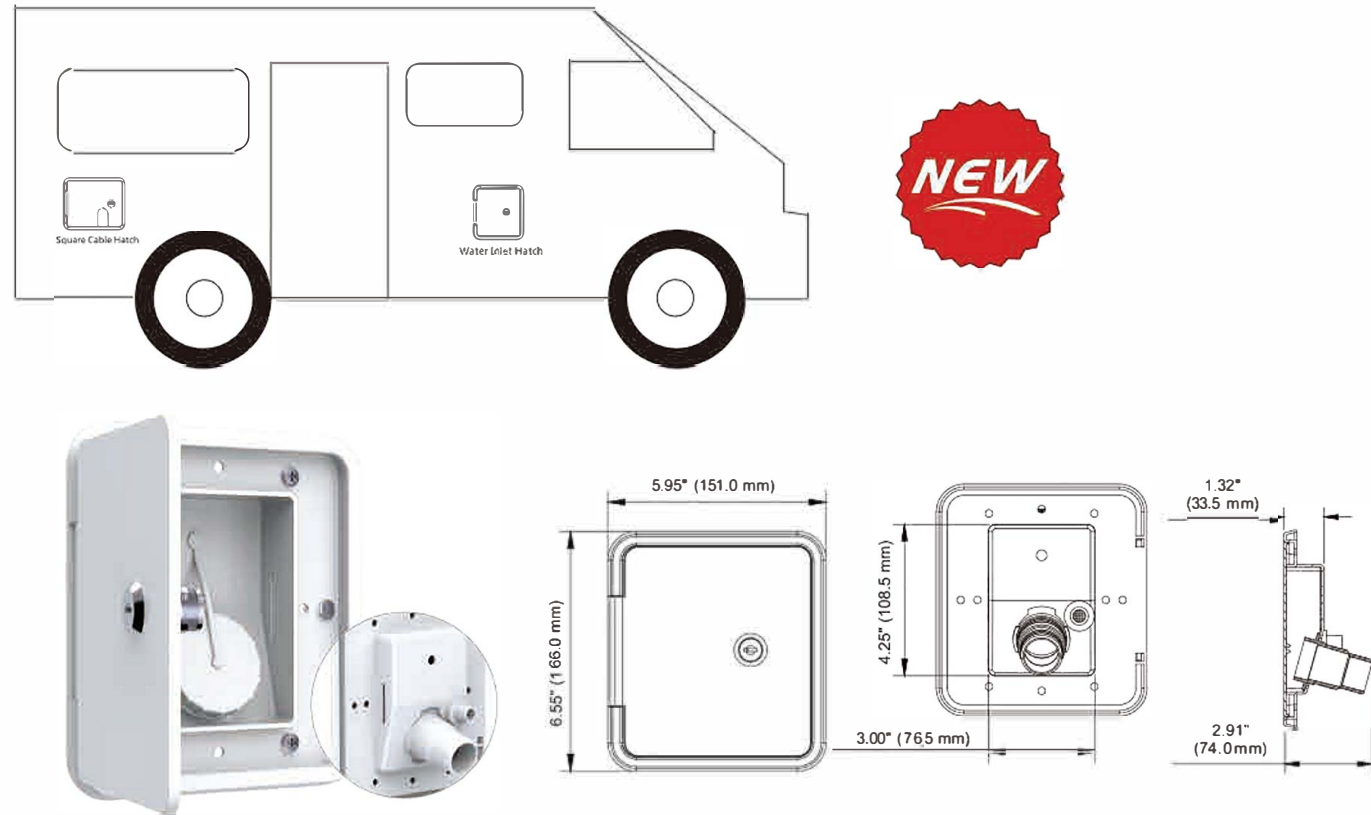

### Technical Date

Model	L1(mm)	W1(mm)	L2(mm)	W2(mm)	Color
SFWH1-151-166-01	5.94*(151mm)	6.54*(166mm)	4.27*(108.5mm)	3.01*(76.5mm)	White
SFWH2-151-166-01	5.94*(151mm)	6.54*(166mm)	4.27*(108.5mm)	3.01*(76.5mm)	Black

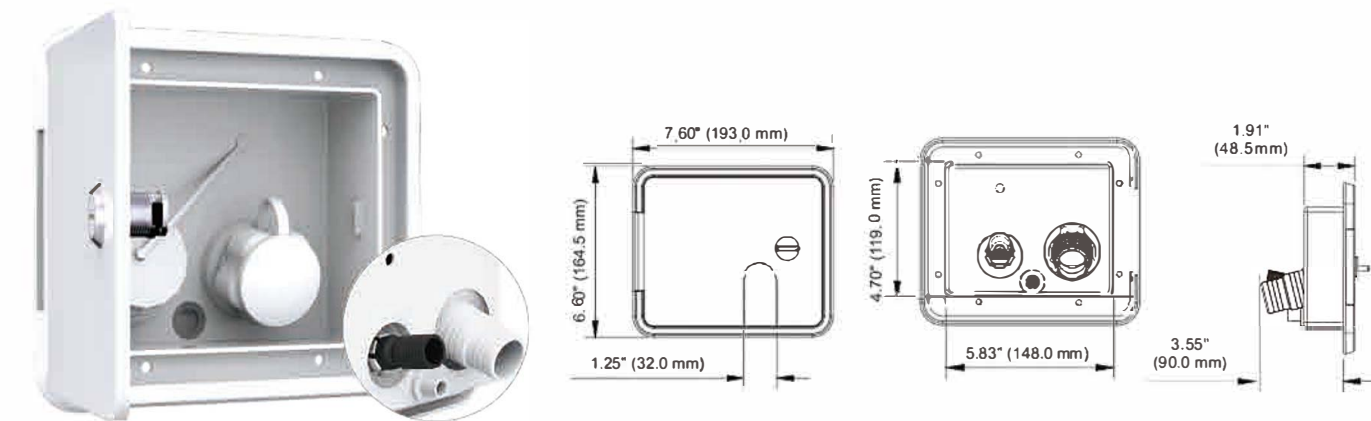


### Technical Date


Model	L1(mm)	W1(mm)	L2(mm)	W2(mm)	Color
SFWH1-193-164-02	7.60*(193mm)	6.48*(164.5mm)	5.83*(148mm)	4.69*(119mm)	White
SFWH2-193-164-02	7.60*(193mm)	6.48*(164.5mm)	5.83*(148mm)	4.69*(119mm)	Black

## SQUARE CABLE HATCH

SEAFLO Square Cable Hatch is for use with RV electrical cables, and it is constructed with UV stabilized ABS. Hatch comes with 2 keys and the hatch door has slide window for door closure while hooked up.

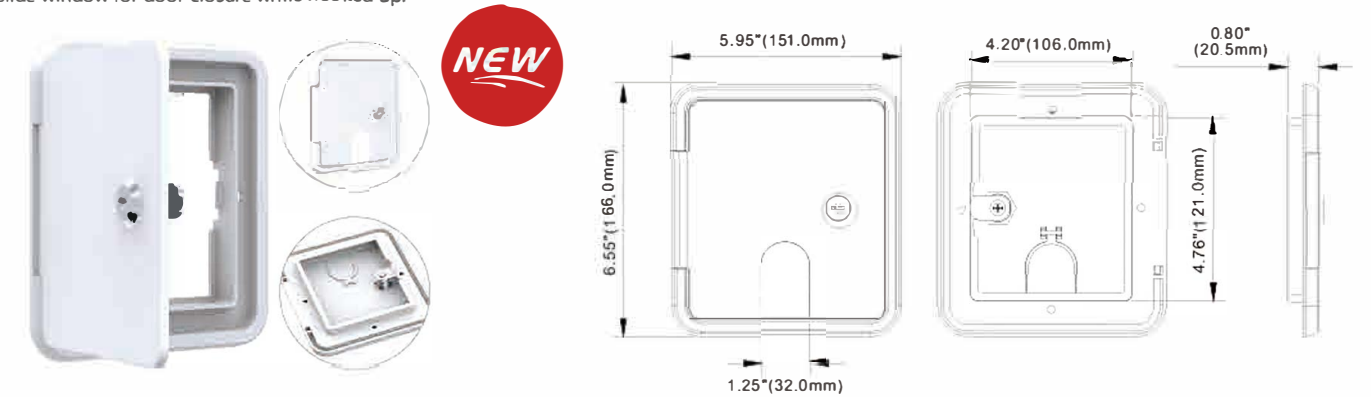

Model	L1(mm)	W1(mm)	L2(mm)	W2(mm)	Color
SFCH1-151-166-01	5.94*(151mm)	6.54*(166mm)	4.17*(106mm)	4.76*(121mm)	White
SFCH2-151-166-01	5.94*(151mm)	6.54*(166mm)	4.17*(106mm)	4.76*(121mm)	Black

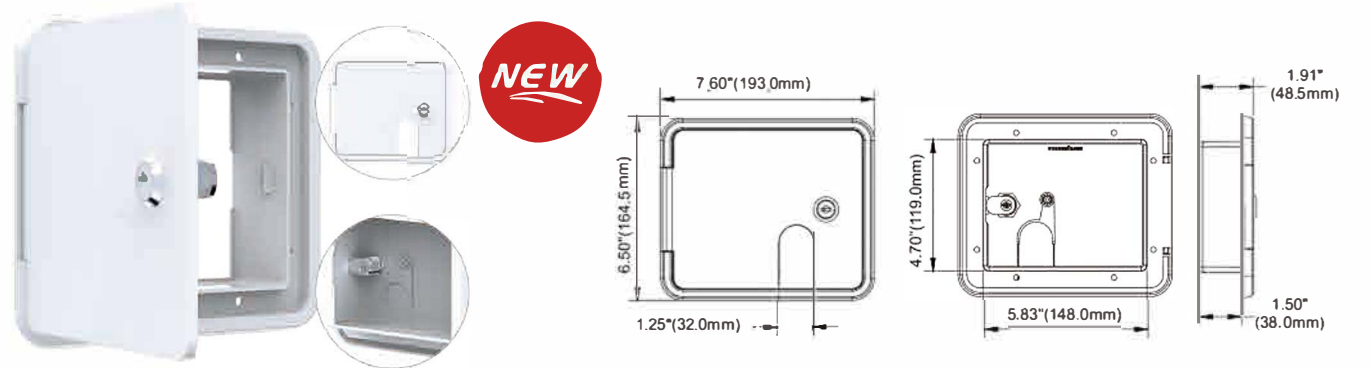

Model	L1(mm)	W1(mm)	L2(mm)	W2(mm)	Color
SFCH1-193-164-02	7.60*(193mm)	6.48*(164.5mm)	5.83*(148mm)	4.69*(119mm)	White
SFCH2-193-164-02	7.60*(193mm)	6.48*(164.5mm)	5.83*(148mm)	4.69*(119mm)	Black

## ROUND CABLE HATCH

SEAFLO Round Cable Hatch is for use with RV electrical cables, and it is constructed with UV stabilized PP. Its hinge is extra heavy duty. It has a 5.2" round O.D. flange and a 2.6" deep cavity to hold the cable end.



Model	Out-Size	In-Size	Color
SFCH1-052-03	5.2" x 2.6" (130 x 66mm)	3.5" (88mm)	White
SFCH2-052-03	5.2" x 2.6" (130 x 66mm)	3.5" (88mm)	Black









## DENT VENT

SEAFLO Dent Vent is use for a quick and easy way to repair the minor damage of RV body and keep the original look; which are made of UV stabilized plastic and combine multiple vents to cover larger damage areas.

### FEATURES & BENEFITS



- Keep the original look
- Made of UV resistant ABS
- There are 3 sizes available
- A quick and easy way to repair the minor damage of RV body
- Save expensive maintenance costs
- Combine multiple vents to cover larger damage areas

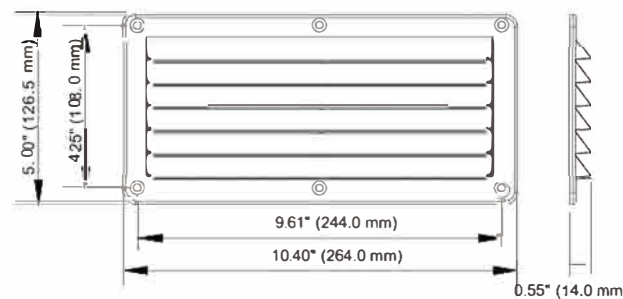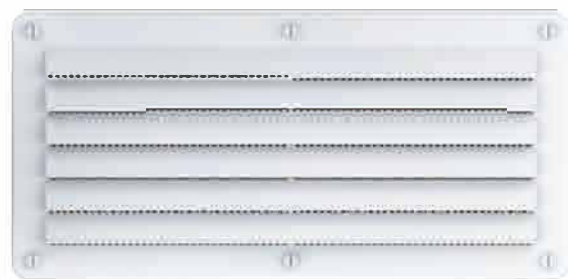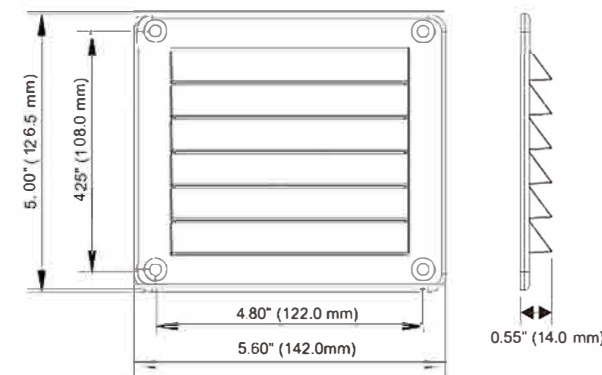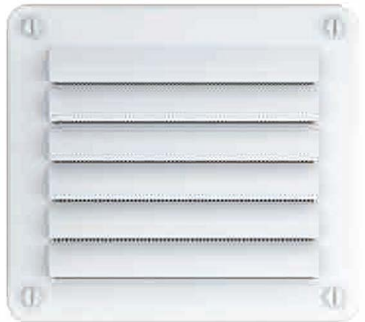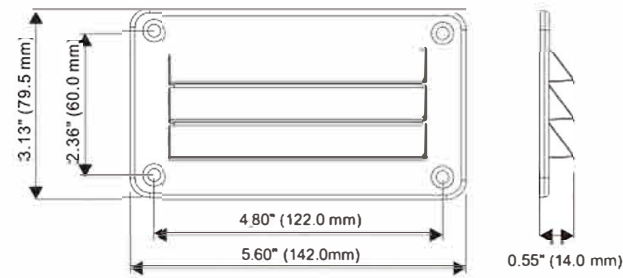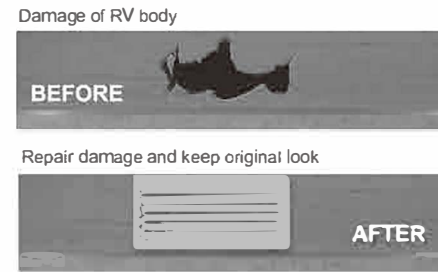

Model	L	H	Color	Model	L	H	Color
SFDV1-140-79-01	5.51" (140mm)	3.11" (79mm)	White	SFDV2-140-125-02	5.51" (140mm)	4.94" (125.5mm)	Black
SFDV2-140-79-01	5.51" (140mm)	3.11" (79mm)	Black	SFDV1-260-125-03	10.26" (260.5mm)	4.92" (125mm)	White
SFDV1-140-125-02	5.51" (140mm)	4.94" (125.5mm)	White	SFDV2-260-125-03	10.26" (260.5mm)	4.92" (125mm)	Black

## PLUMBING VENT

SEAFLO Plumbing Vent is made of PP and it fits up to a 2 inch diameter with 2-1/2 Inch projection vent pipes. A top cap is included, which can be locked on or removed with a twist of the wrist without the need of tools.

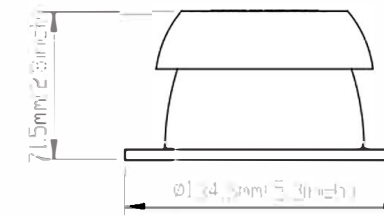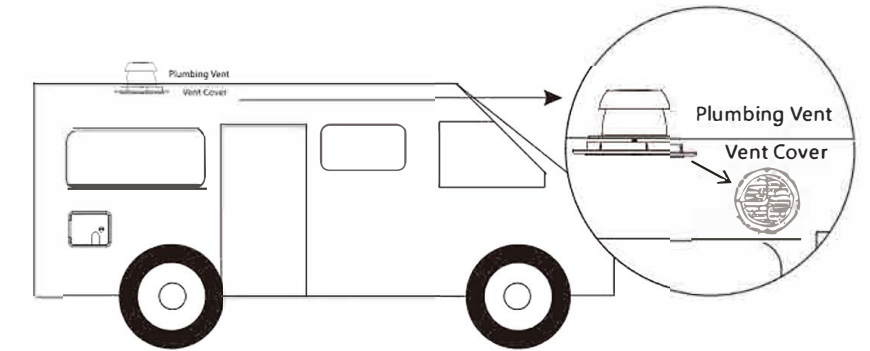


Model	Size	Color
SFPV1-01	5.3" x 2.8" (134.5 x 71.5 mm)	White
SFPV2-01	5.3" x 2.8" (134.5 x 71.5 mm)	Black



## VENT COVER

SEAFLO Vent Cover is made of UV stabilized PP, which is very easy to be installed. There are up to two blades that can be adjusted to change the air flow. Also two of blades can be detached to get a largest air flow.

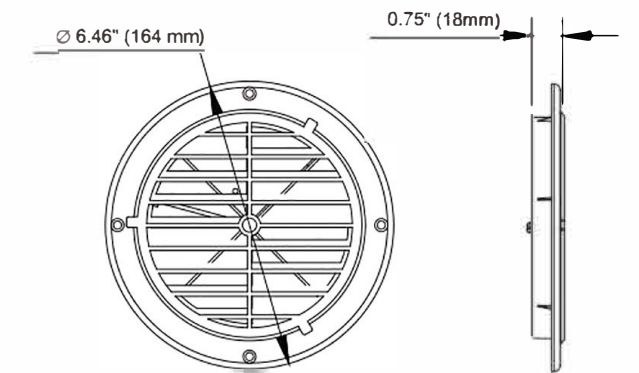

01

02

### FEATURES & BENEFITS

- Made of UV resistant PP
- Air flow can be adjusted by blades
- Blades are removable
- Easy to install




Model	Blade	Color
SFVC1-01	0	White
SFVC2-01	0	Black
SFVC1-02	2	White
SFVC2-02	2	Black



## WATER INLET


SEAFLO Water Inlet is used for RV fresh water system and it is constructed with UV stabilized plastic. There are a check valve inside and different model have different features.

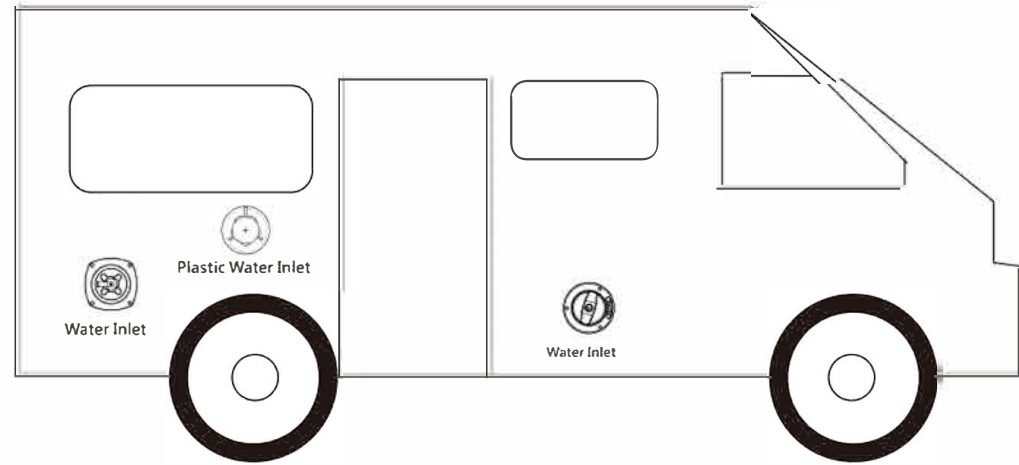

### WATER INLET WITH WATER PRESSURE REGULATORS-01

#### FEATURES & BENEFITS

- Constructed with UV stabilized plastic
- Continuous protection from high pressure surges
- Fits standard hose fittings
- Built in check valve
- Brass pipe threads
- Quick, permanent wall mount installation

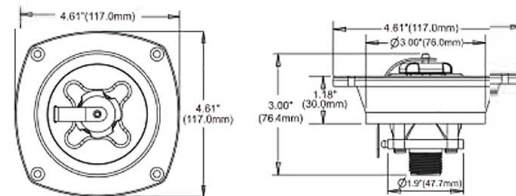


Model	Description	Color
SFWI1-01	Pressure Regulated Water Inlet	White
SFWI2-01	Pressure Regulated Water Inlet	Black

### WATER INLET WITH LOCK-02

#### FEATURES & BENEFITS

- With 2 Keys & Lock
- 1/2" air vent for a fast fill
- Design for filling the water holding tank with gravity
- Constructed with UV stabilized Plastic

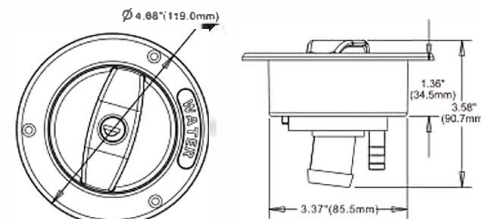


Model	Description	Color
SFWI1-02	Water Inlet With Lock	White
SFWI2-02	Water Inlet With Lock	Black

### PLASTIC WATER INLET-03

#### FEATURES & BENEFITS

- Constructed with plastic
- Can fit into SEAFLO water inlet hatch
- 1/2" BSP and G1/2 thread
- Built in check valve

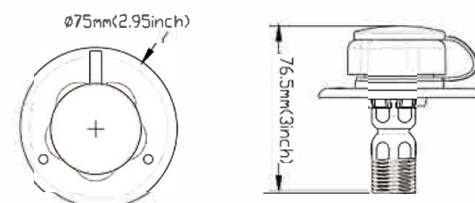

Model	Description	Color
SFWI1-03	Plastic Water Inlet	White



## EXTERNAL SHOWER

SEAFLO RV External Shower Box is made of UV stabilized PP, which is with lock and keys. The box is durable, impact & fade resistant.

#### FEATURES & BENEFITS

- Made of UV stabilized PP
- With lock and keys
- Durable, impact & fade resistant
- Choose from black or white

Model	Color
SFES1-01	White
SFES2-01	Black

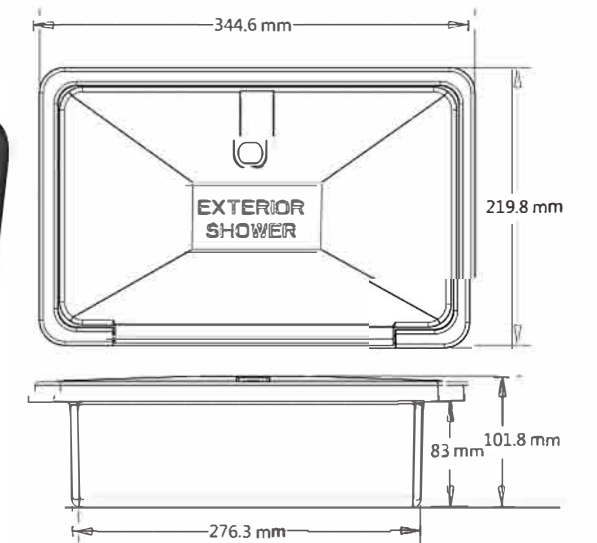
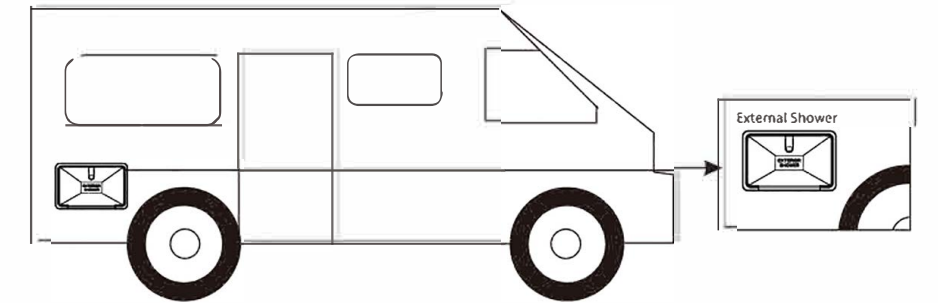


## PVC WASTE VALVE

SEAFLO PVC Waste Valve is used on sewer line in kitchen, bath room, washing sink to prevent bad smell come into internal of RV.

#### FEATURES & BENEFITS

- PVC size is 2"
- Vertical mounting position
- EPDM seal for resistance to water and oils
- PVC construction for strength and resistance to corrosion and mild chemicals

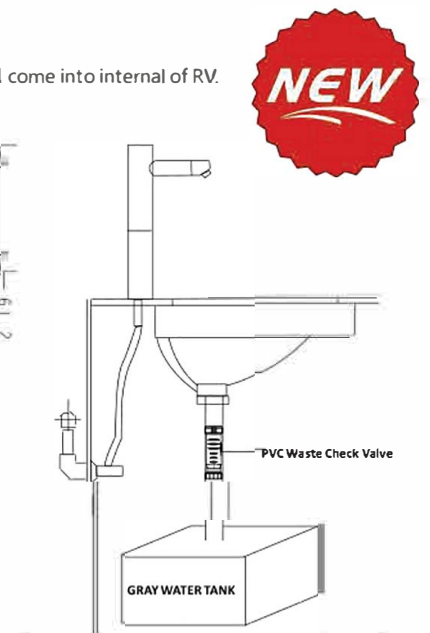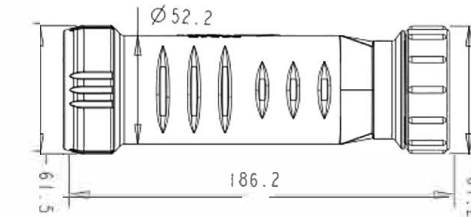


Model	Color
SFWV1-01	White
SFWV2-01	Black



## DIAPHRAGM HAND PUMPS


### FEATURES & BENEFITS

- Proven design - tough yet lightweight polypropylene materials
- Versatility of installation
- Simple plumbing- 1-1/4" (34mm) smooth hose connection options
- Ease of operation - molded grip handle
- Easy maintenance - easy remove diaphragm
- Secure fit - robust molded base
- Compact design - ideal for confined spaces
- Reliable performance - U-shaped outlet valve
- Efficient performance - up to 5.3 Gallons Per Minute

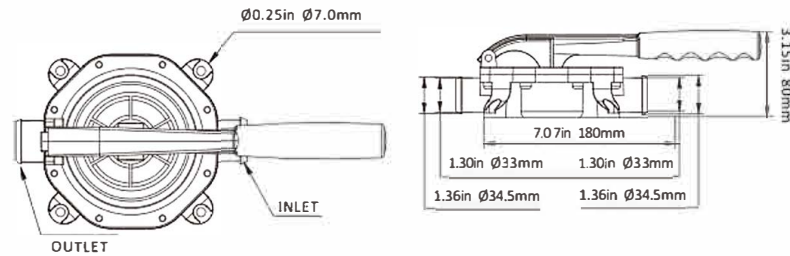


### STANDARD PUMP CONFIGURATIONS

Plastic hand pump	
Product Code	SFDHP-G720-01
Hose Connections	34.5 mm (1.36") Hose Connections
Weight	0.99 lbs (0.45 kg)
Materials	Pump Body: Glass-filled Polypropylene, Diaphragm: EPDM, Fasteners: Stainless Steel
Materials On Contact with Fluid	Glass-filled Polypropylene, EPDM, Stainless Steel

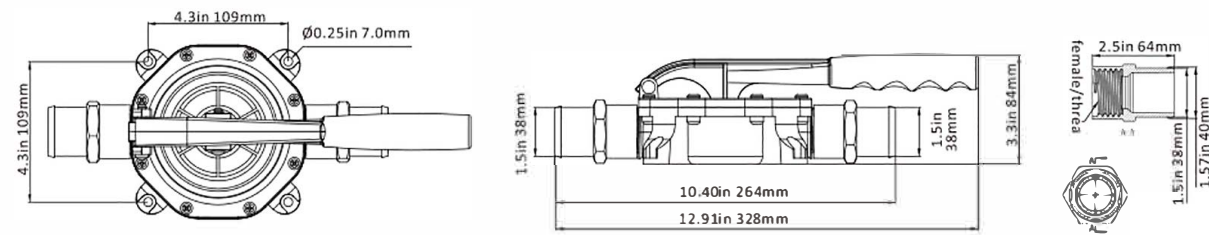

### STANDARD PUMP CONFIGURATIONS

Plastic hand pump	
Product Code	SFDHP-G720-02
Hose Connections	38.1mm (1.5") House Connections
Weight	0.54kg (1.19lbs)
Materials	Pump Body: Glass-filled Polypropylene, Diaphragm: EPDM, Fasteners: Stainless Steel
Materials On Contact with Fluid	Glass-filled Polypropylene, EPDM, Stainless Steel

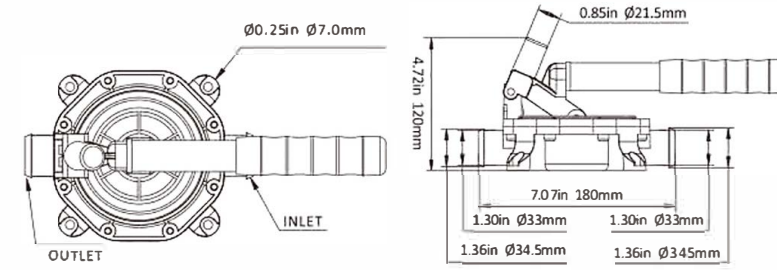

### STANDARD PUMP CONFIGURATIONS


Aluminum hand pump	
Product Code	SFDHA-G720-01
Hose Connections	34.5 mm (1.36") Hose Connections
Weight	1.25 lbs (0.57 kg)
Materials	Pump Body: Glass-filled Polypropylene, Diaphragm: EPDM, Fasteners: Stainless Steel
Materials On Contact with Fluid	Glass-filled Polypropylene, EPDM, Stainless Steel



## PISTON HAND PUMPS

### FEATURES & BENEFITS

- Portable design - lightweight
- Ease of use - versatile flexible outlet pipe
- Ready to pump - 1"/25 mm hose no fittings or plumbing required
- Ease of operation - simple handle plunger
- Suitable for bilge water or diesel transfer
- Available in two barrel lengths 410 mm (16") or 560mm (22")

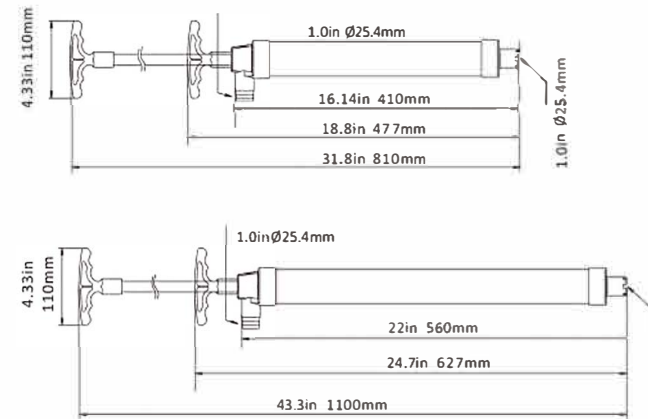

### TYPICAL APPLICATIONS

- Marine
- Kayaks & Canoes
- RV & Campers
- Industrial




### STANDARD PUMP CONFIGURATIONS

	Long Barrel Version	Short Barrel Version
Product Code	SFPH-H1100-01/02	SFPH-H810-01/02
Hose Connections	25 mm (1") Hose Connections	25 mm (1") Hose Connections
Weight	0.64 lbs (0.29 kg)	0.48 lbs (0.22 kg)
Materials	Pump Body: PP, Valve: EPDM	Pump Body: PP, Valve: EPDM
Materials In Contact with Fluid	PP, EPDM	PP, EPDM
Suction Lift	1m (3 ft)	1m (3 ft)
Discharge Head	0.5 m (1.5 ft)	0.5 m (1.5 ft)
45 Strokes per Minute	19 ltrs (5 US gals)	19 ltrs (5 US gals)
70 Strokes per Minute	31.4 ltrs (8.3 US gals)	31.4 ltrs (8.3 US gals)




**HATCHES**


ABS Anti-aging, Anti-ultraviolet.  
180° opening hatches.  
Easy 'click-in' construction.  
Corrosion free synthetic fittings and durable rubber seals.

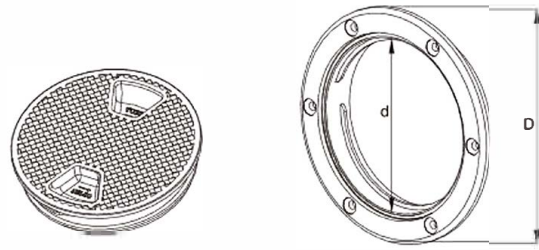

Model	Size inch	d (mm)	D (mm)	Color
SFRH1-004-01	4	101	143	white
SFRH1-006-01	6	151	198	white
SFRH1-008-01	8	180	250	white

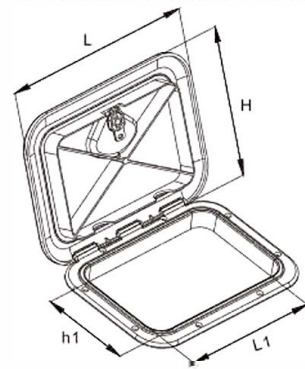



Model	H(mm)	L(mm)	h1(mm)	L1(mm)
SFRE1-270-375-01	270	375	192	291



Model	H(mm)	L(mm)	h1(mm)	L1(mm)
SFRE1-243-607-01	243	607	168	525
SFRE1-315-440-01	315	440	240	358
SFRE1-353-606-01	353	606	278	524
SFRE1-370-375-01	370	375	295	295
SFRE1-460-510-01	460	510	383	436


**PORTHOLE**

4mm thickness tempered glass.  
ABS Anti-aging, Anti-ultraviolet.  
Casted and polished 316 stainless steel accessories.  
Easy 'click-in' construction.  
Corrosion free synthetic fittings and durable rubber seals.

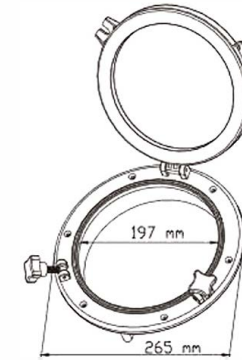


Model	Size (cm)	Color
SFPP1-01	21	white
SFPP2-01	21	black

Model	Size (cm)	Color
SFPP1-02	26	white
SFPP2-02	26	black

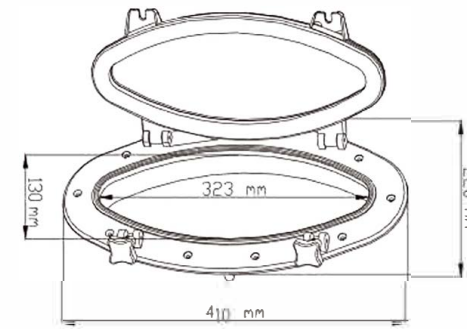

Model	Shape	Color
SFPP1-03	Oval shape porthole	white
SFPP2-03	Oval shape porthole	black

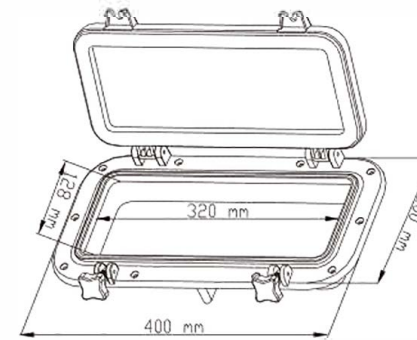

Model	Shape	Color
SFPP1-04	Rectangular shape porthole	white
SFPP2-04	Rectangular shape porthole	black



## GENUINE PARTS AND ACCESSORIES



### PUMP FITTINGS

Item Number	Size	Fitting Type	Material
21F001	15/32" X 3/8" Barb	HB Elbow Fitting w/ O-Ring	PA
21F002	15/32" X 1/2" Barb	HB Elbow Fitting w/ O-Ring	PA
21F003	3/8" x 1/4" QA	TUBE Straight w/ O-Ring	POM
41F001	3/4" QA x 1/2" Barb	HS Elbow Fitting w/ O-Ring	Black Nylon
41F002	3/4" QA x 1/2" MNPT	MNPT Elbow w/ O-Ring	Black Nylon
41F003	3/4" QA x 1/2" Barb	HS Straight Fitting w/ O-Ring	Black Nylon
41F004	3/4" QA x 1/2" MNPT	MNPT Straight w/ O-Ring	Black Nylon
41F005	3/4" QA x 1/2"	TUBE Straight w/ O-Ring	Black Nylon
41F006	3/4" QA x 3/4" Barb	HS Straight Fitting w/ O-Ring	Black Nylon
31F01	3/8" MNPT x 3/8" Barb	MNPT Straight Fitting	Nylon
35F01	5/8" QA x 3/8" Barb	HB Straight Fitting w/ O-Ring	Nylon
35F02	5/8" QA x 1/2" Barb	HB Straight Fitting w/ O-Ring	Nylon
35F03	5/8" QA x 3/8" Barb	HB Elbow Fitting w/ O-Ring	Nylon
35F04	5/8" QA x 1/2" Barb	HB Elbow Fitting w/ O-Ring	Nylon
51F01	1/2" -14 FNPT x 1/2" Barb	HSE Barb Straight Fitting	POM & PP
51F02	1/2" -14 FNPT x 3/8" Barb	HSE Barb Straight Fitting	POM & PP
51F03	1/2" -14 FNPT x 1/2" Barb	HSE Barb Elbow Fitting	POM & PP
51F04	1/2" -14 FNPT x 1/2" -14 MNPT	MNPT Elbow Fitting	POM & PP
51F05	1/2" -14FNPT x 3/8 " Barb	HSE Barb Elbow Fitting	POM & PP
51F08	1/2" -14FNPT x 3/8 " Barb	HSE Barb Straight Fitting	POM & PP

## GENUINE PARTS AND ACCESSORIES



### PUMP FILTERS

Item Number	Size	Fitting Type	Mesh Size
35S01	5/8" Female Quick Attach	5/8" Male Quick Attach	50
41S01	3/4" Male Quick Attach	3/8" Hose Barb	50
41S03	3/4" Male Quick Attach	3/4" Female Quick Attach	50
51S01	1/2"-14 MNPT	1/2"-14 FNPT Inline Filter/Strainer	50
52S01	3/4" Male Quick Attach	1/2" Hose Barb	50

### PRESSURE SWITCHES

PSI	Max. Amps (A)
35	20
40	20
45	20
60	20
70	20
80	20
100	20

Suitable for 21/22/33/34/41/42/43/51 series diaphragm pumps.



### PRESSURE SWITCHES

PSI	Max. Amps (A)
80	20
100	20
120	20
160	20

Suitable for 31/35/52/53/54 series diaphragm pumps.





**GENUINE PARTS AND ACCESSORIES**



**PLASTIC DRAIN SOCKETS**

Model	Size inch	H (mm)	D (mm)	D1 (mm)	d (mm)	d1 (mm)	di (mm)	Color
SFDS1-0625-01	5/8"	73.5	42.0	17.0	23.5	16.0	10.0	White
SFDS2-0625-01	5/8"	73.5	42.0	17.0	23.5	16.0	10.0	Black
SFDS1-0750-01	3/4"	80.0	50.5	19.0	27.0	19.0	11.5	White
SFDS2-0750-01	3/4"	80.0	50.5	19.0	27.0	19.0	11.5	Black
SFDS1-1000-01	1"	93.0	61.0	26.0	33.0	25.5	18.0	White
SFDS2-1000-01	1"	93.0	61.0	26.0	33.0	25.5	18.0	Black
SFDS1-1250-01	1-1/4"	97.0	67.5	33.0	41.0	32.0	24.0	White
SFDS2-1250-01	1-1/4"	97.0	67.5	33.0	41.0	32.0	24.0	Black
SFDS1-1500-01	1-1/2"	102.0	75.0	47.0	46.5	38.5	28.0	White
SFDS2-1500-01	1-1/2"	102.0	75.0	47.0	46.5	38.5	28.0	Black
SFDS1-1125-01	1-1/8"	94.0	64.0	23.7	31.8	28.5	25.6	White
SFDS2-1125-01	1-1/8"	94.0	64.0	23.7	31.8	28.5	25.6	Black
SFDS1-2000-01	2"	130.0	90.0	49.0	57.0	50.8	47.3	White
SFDS2-2000-01	2"	130.0	90.0	49.0	57.0	50.8	47.3	Black



**FUEL DECK FILLER CAPS**


**WATER DECK FILLER CAPS**

Model	H (mm)	D (mm)	d (mm)	d1 (mm)	d2 (mm)	di (mm)	Color
SFCW1-01	70	85	50	40	38	34	white
SFCW2-01	70	85	50	40	38	34	black
SFCF1-01	70	85	50	40	38	34	white
SFCF2-01	70	85	50	40	38	34	black

**DOOR HOLDER / KNOB FREE CABINET**

**FEATURES & BENEFITS**

- Permanent magnet
- 4 kgs suction
- casted and polished 316 stainless steel accessories

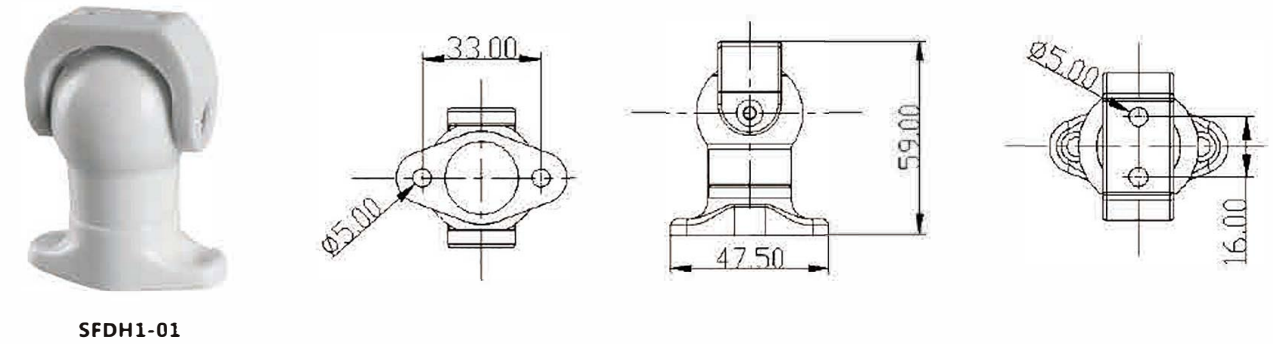


**SFDH1-01**

**ON/OFF Remote Control**

SEAFLO 12-volt ON/OFF Remote Control is Ideal for equipment mounted on ATV's, utility vehicles or pickup hitches. Keychain with clip is used to turn off your equipment.

**Features & Benefits**

- Extended Wireless Range up to 50meters
- Quick Connect Into SEAFLO products Or Wire Into 12Volt Products Up To 20Amps
- Turn your 12-volt sprayer or spreader on or off from operator's seat
- Easy to install remote control module connect between battery and pump or motor
- Kit includes one receiver box and 1 remote control
- Range can be extending further depend in area, device setup and remote control battery strength

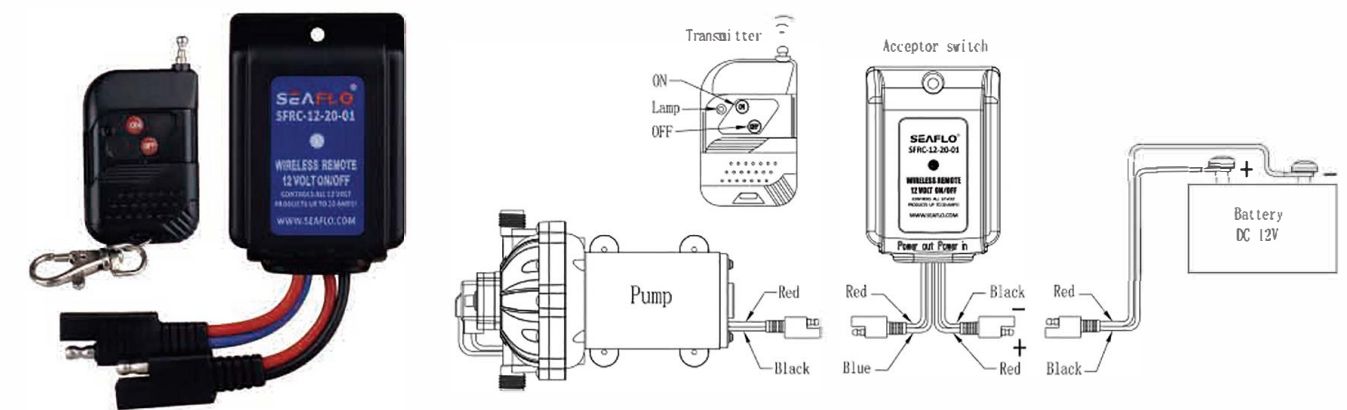

Model	Volts	Max Amps	Dimensions	N.W./G.W.
SFRC-12-20-01	12V	20A	172x131x35 mm	0.14/0.12 kg