




# ALP25N

## Data Sheet

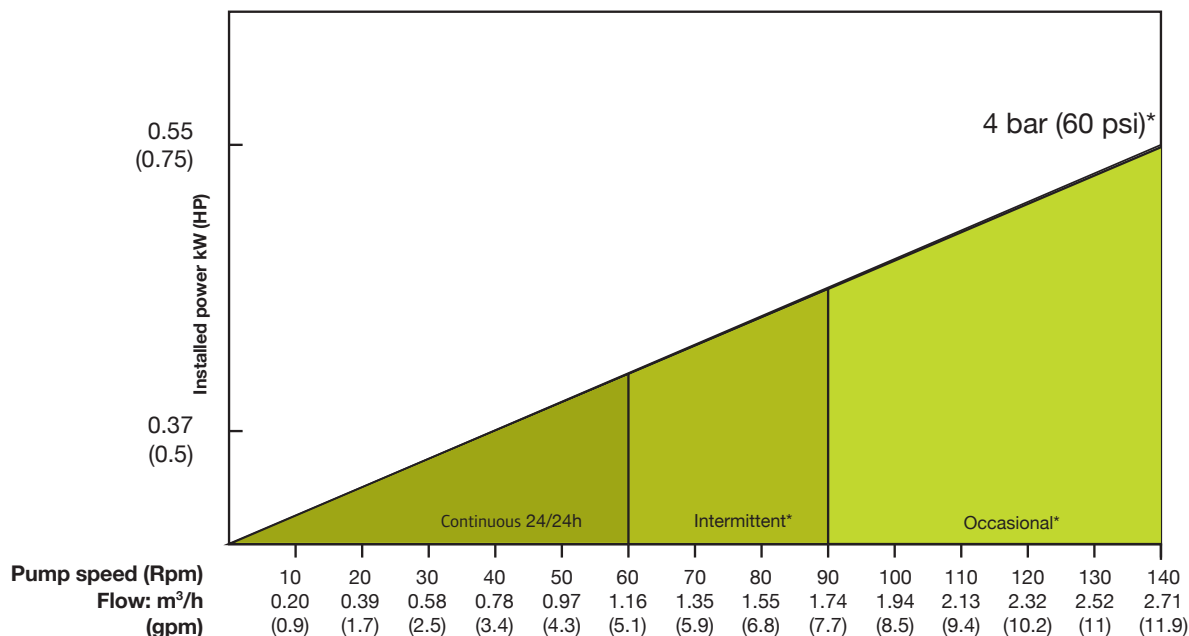

1 rpm = 0.0193 m³/hr = 0.0852 gpm  
1 rev = 0.3224 L = 0.0852 gal


Assembly Weight: 55 kg / 121 lbs

\*Intermittent use : minimum one hour stop after 2 hours run / \*Occasional use : maximum one hour a day

\* 4 bar (60 psi) pressure limit is applicable when using a reinforced hose. The pressure limit when using tubing is 2 bar (30 psi)

## DIMENSIONS

mm (Inch)

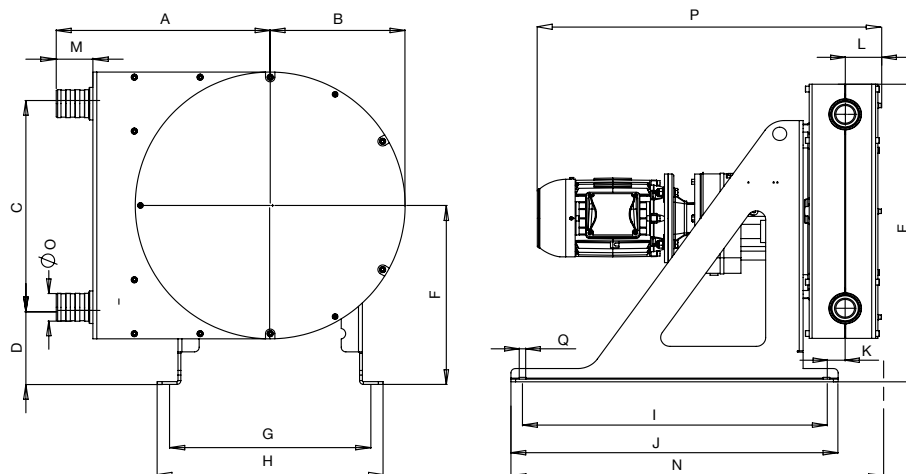

| SIZE       | A             | B            | C             | D           | E             | F            | G            | H             | I             | J             | K            | L           | M           | N           | ØO           | P              | ØQ          |
|------------|---------------|--------------|---------------|-------------|---------------|--------------|--------------|---------------|---------------|---------------|--------------|-------------|-------------|-------------|--------------|----------------|-------------|
| ALP25N-F*  | 275<br>(10.8) | 165<br>(6.5) | 256<br>(10.0) | 90<br>(3.5) | 383<br>(15.0) | 218<br>(8.6) | 240<br>(9.4) | 270<br>(10.6) | 400<br>(15.7) | 440<br>(17.3) | 18<br>(0.70) | 49<br>(1.9) | 48<br>(1.9) | 482<br>(19) | 38*<br>(1.5) | 605<br>(23.81) | 11<br>(0.4) |
| ALP25N-VM* | 275<br>(10.8) | 165<br>(6.5) | 256<br>(10.0) | 90<br>(3.5) | 383<br>(15.0) | 218<br>(8.6) | 240<br>(9.4) | 270<br>(10.6) | 400<br>(15.7) | 440<br>(17.3) | 18<br>(0.70) | 49<br>(1.9) | 48<br>(1.9) | 482<br>(19) | 38*<br>(1.5) | 695<br>(27.4)  | 11<br>(0.4) |

\* Hose barb

\* F = Fixed speed

\* VM = Mechanical speed variator